



- LED Feuchtraum Anbauleuchte
- Klassisch kantiges Design
- Nachhaltig durch Zhaga-konformes LED Modul, austauschbar
- Prädestiniert für den Einsatz in rauen Umgebungen
- Wanne aus UV-beständigem Polymethylmethacrylat (PMMA)
- Hohe LED-Lebensdauer 50.000 h bei L80/B10
- MacAdam 3
- Umgebungstemperatur: -20°C bis +25°C
- Alterungsbeständige PU-Dichtung
- Halogenfreie Verdrahtung
- Schutzart: IP54
- Schutzklasse: I
- Integriertes elektronisches Versorgungsteil

Auf Anfrage

- DALI
- Mit 3h Notlichteinheit
- HF Sensor (Master/Slave)

- LED damp proof surface mounted luminaire
- Classic angular design
- Sustainable due to Zhaga-compliant LED module, replaceable
- Predestined for use in harsh environments
- Diffuser made of UV-resistant polymethyl methacrylate (PMMA)
- Long LED lifetime 50.000 h at L80/B10
- MacAdam 3
- Ambient temperature: -20°C to +25°C
- Aging resistant PU gasket
- Halogen free wiring
- Protection class: IP54
- Protection class: I
- Integrated electronic power supply

On request

- DALI
- With 3h emergency lighting unit
- HF Sensor (Master/Slave)



ALSF
LED Feuchtraum Anbauleuchte mit Multiwatt-Netzteil* und Multilumen-Funktion
LED surface mounted luminaire with multiwatt power supply* and multilumen function
∧ 120° / 220-240V / UGR<22 / CRI >80


L1260 x H95 x B/W105 mm	27/42 W
4000 K ○ ALSF-LED-1260NW-M	3200/5000 lm
3000 K ○ ALSF-LED-1260WW-M	2900/4700 lm

Lochabstand Befestigung (E): 740mm

L1560 x H95 x B/W105 mm	43/55 W	
4000 K ○ ALSF-LED-1560NW-B	5100/6600 lm	120 lm/W
3000 K ○ ALSF-LED-1560WW-B	4800/6300 lm	

Lochabstand Befestigung (E): 850mm

*Werkseitig auf höheren Lumenwerte eingestellt
*Factory set for higher lumen value

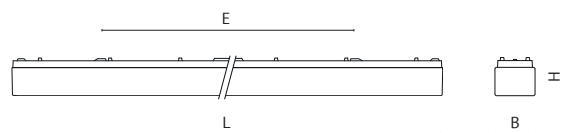

○ Weiß | White

