

## Description

LED damp proof surface mounted luminaire, Basic, 43W, 3000K, 220-240V, IP54, Class I, Diffuser made of UV-resistant polymethyl methacrylate (PMMA), integrated electronic power supply, L=1260\*W=105\*H=95, Ambient temperature: -20°C to +25°C

## General data

<b>Colour housing:</b>	White
<b>Degree of protection (IP):</b>	IP54
<b>Material housing:</b>	Plastic
<b>Protection class:</b>	I
<b>Suitable for ceiling mounting:</b>	Yes
<b>Suitable for surface mounting:</b>	Yes
<b>Suitable for wall mounting:</b>	Yes

## Photometric data

<b>Beam angle:</b>	Extreme wide beam >80°
<b>Colour consistency (McAdam ellipse):</b>	SDCM3
<b>Colour of light:</b>	White
<b>Colour rendering index CRI:</b>	80-89
<b>Colour temperature:</b>	3000K
<b>Light outlet:</b>	Direct
<b>Light sharing:</b>	Symmetric
<b>Luminaire efficacy:</b>	112lm/W
<b>Max. system power:</b>	43W
<b>Rated luminous flux according to IEC 62722-2-1:</b>	4800lm
<b>Suitable for number of lamps:</b>	1
<b>Unified Glare Ratio (UGR):</b>	21.8



## Address/Contact



**Electrical data**

**Exchangeable control gear:**

Yes

**Impact strength:**

IK02

**No dim function:**

Yes

**Nominal voltage:**

220V - 240V

**Voltage type:**

AC

**Product dimensions**

**Height/depth:**



95mm

**Length:**

1260mm

**Width:**

105mm

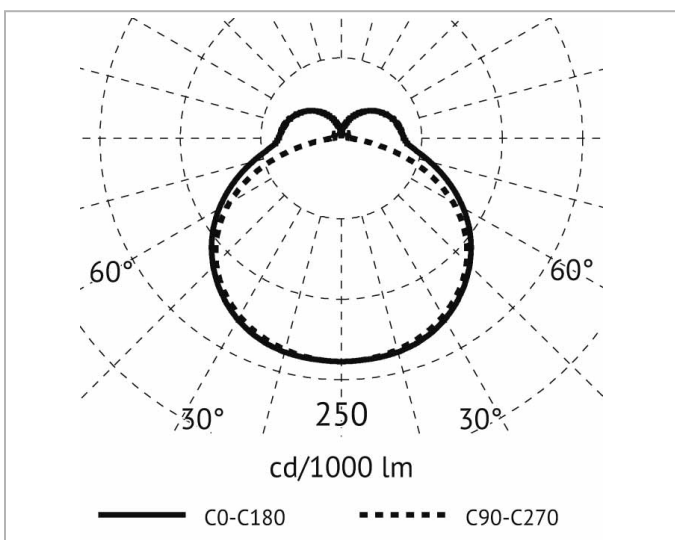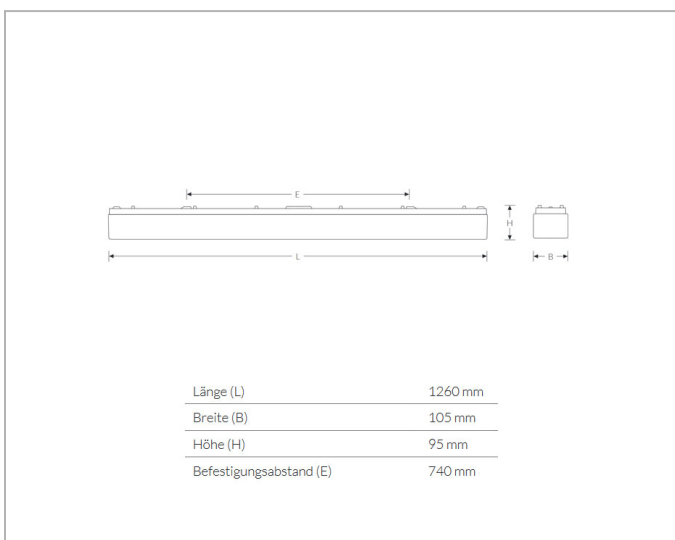

**Adress/Contact**