
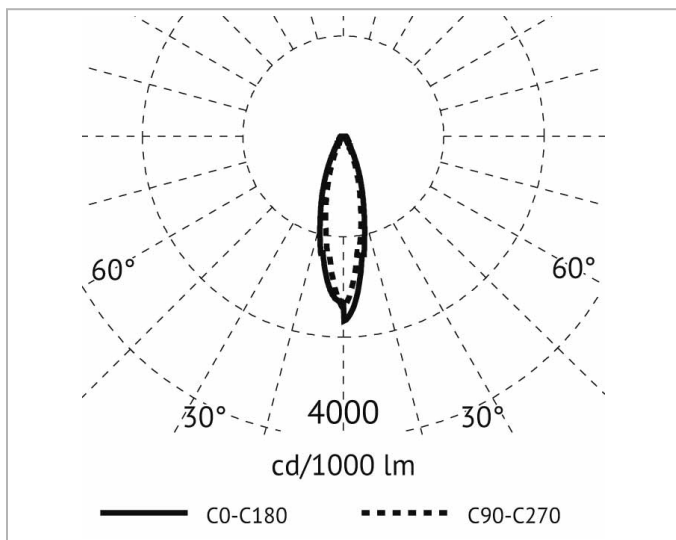


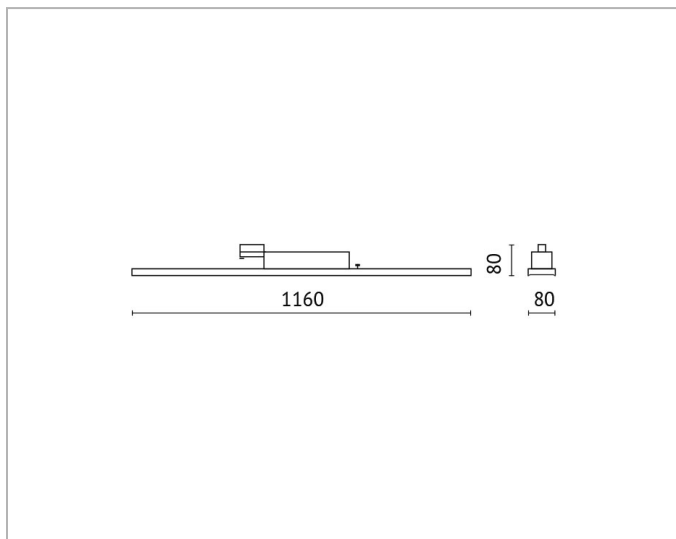

Description

BRICK LED linear luminaire, DALI ONETRACK, 40W, 4000K, CRI <90, with track 3-Ph. adapter, integrated DALI power supply unit, beam angle 30°, die-cast aluminum housing, housing color white

General data

Adjustability:	Not adjustable
Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Max. system power:	40W
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
Dimming DALI:	Yes
Exchangeable control gear:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Height/depth:



80mm

Length:

1160mm

Width:

80mm

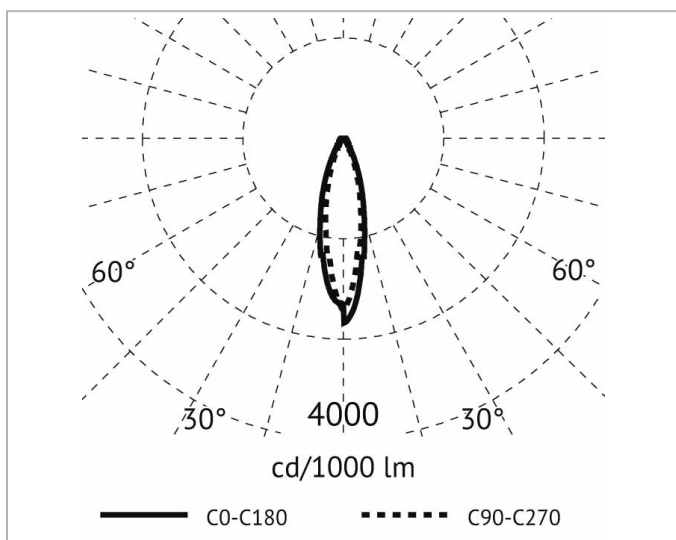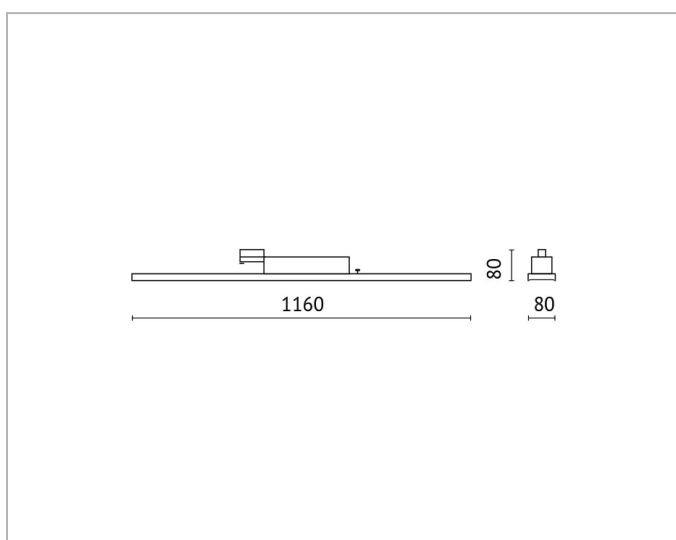

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de