

DESCRIPTION OF PARTS

LED track spotlight with adapter
Luminaire housing: Aluminum die-cast, colour: White or black

TECHNICAL DATA


Indoors, operation only in power-track-systems (Global, Eutrac, Erco, Nokia)!
Protection class: I | Protection class: IP20 | Available beam angle: 15°/36°/60°

Article number	Connected load	CCT	Light source: CITIZEN ELECTRONICS Co., LTD.
SLC-18NW	18W, 220-250V, 50 Hz	4000K	-
SLC-18WNW	18W, 220-250V, 50 Hz	3500K	CLU02J-1203C9-302H5U2
SLC-18WW	18W, 220-250V, 50 Hz	3000K	-
SLC-18WW	18W, 220-250V, 50 Hz	2700K	-
SLC-30NW	30W, 220-250V, 50 Hz	4000K	CLU038-1208C4-403H5M3-F1
SLC-30WNW	30W, 220-250V, 50 Hz	3500K	CLU038-1208C4-353H6M3-F1
SLC-30WW	30W, 220-250V, 50 Hz	3000K	CLU038-1208C4-303H5M3-F1
SLC-30WW	30W, 220-250V, 50 Hz	2700K	CLU038-1208C4-273H5M3-F1


This luminaire contains one light source of energy efficiency class E

Dimensions	18W	30W
Luminaire height incl. power track	255 mm	260 mm
Luminaire head	Ø65 x H165 mm	Ø84 x H195 mm

The product consists of two components. Luminaire with light source and internal power supply.



The light source is only exchangeable by a professional.



The LED driver is only exchangeable by a professional.



Protection class I



CE label



The product is only for use in interiors.



The product may not be disposed of in the household garbage.



Don't look directly into the LED! The LED is that bright that it might damage your eyes!



Notification of Risks



Safety Instructions



Cleaning Instructions



LED luminaire gets very warm during operation. Be careful when touching the body.

SAFETY



READ THE INSTRUCTIONS BEFORE USING THIS PRODUCT.
KEEP THE SAFETY AND OPERATING INSTRUCTIONS FOR FUTURE USE.

The warranty claim and guarantee is rendered invalid in the event of damage to the product, which is caused by not following the operating instructions. We are not liable for the consequent damage. Because of specific characteristics of LED's (life, deviation in colour etc.) we formulated special terms for planing and installing our LED products. They are part of these installation manual! Should they not be available, request them please!

SAFETY INFORMATION



- The luminaire is suitable for indoor use only, in dry and closed rooms.



- Don't install under power.
- Follow the instruction manual for installation.
- Installation only by qualified and authorised persons.
- Do not use the product when it has been damaged (defective covers) or there are operational faults such as flickering, smoking, steaming, crackling noises or the smell of smoke.
- A damaged or defective product must be changed or repaired by the manufacturer, a service person or a comparable qualified person.
- Installation only under observance of the valid guidelines specific to application and country among others VDE 0.100.
- Never open one of the electrical operating agents or plug any objects into them. Such procedures signify a danger to life through electrical shock.
- Absolutely avoid contact between the product and water or other liquids. For reasons of electrical safety, the light may not be placed in contact with water or other liquids or submerged in water.
- The product may not be changed or modified.
- In operation or after extended periods of operation, avoid touching the external surface of the LED luminaire, there is a danger of high temperatures that can cause burns.
- Don't look directly into the LED! The LED is that bright that it might damage your eyes!



MAINTENANCE AND CLEANING

The light source is only exchangeable by a professional.



- Do not use solvents, such as benzene and similar agents. The light would be damaged thereby.
- Only use a dry, lint-free cloth for cleaning the product.

DISPOSAL

The packaging consists of environmentally friendly materials. Dispose of them in the local recycling containers.



Do not dispose of this product in the household garbage when it has reached the end of its lifecycle, but rather take it to a disposal center. Your local officials will provide you with information about collection offices and their business hours.

SLC

LED track spot light

SLC-18NW	SLC-30NW
SLC-18WNW	SLC-30WNW
SLC-18WW	SLC-30WW
SLC-18SW	SLC-30SW



White



Black



INTENDED USAGE

This product will only serve the purpose of illumination.

SCOPE OF DELIVERY

LED track spotlight with adapter
Set of instructions for assembly, operation and safety

TECHNICAL CHANGES

Changes in the sense of technical progress can be made without prior notice.

address | contact

A.L.S. GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
Tel.: +49 (0) 75 42 93 44-0 | Fax.: +49 (0) 75 42 93 44-30
E-Mail: info@als.de | Web: www.als.de

Version: 2022-03-17

EN

01



01 Switch off before installation. Switch on only after complete installation and examination of the circuit. Professional electrician for installation and maintenance only. Turn Off power supply before starting any installation. Read instructions & check you have all the tools and accessories to complete the installation correctly.




02 Check the adapter before inserting it, if all plastic locks and contacts are flush in the adapter! All interlocks and switching positions must be in **zero position!** Failure to do so will destroy the adapter and must not be used any more!

Fixing materials:


The warranty is void if the buyer or a third party repairs or modifies the luminaire.

03a

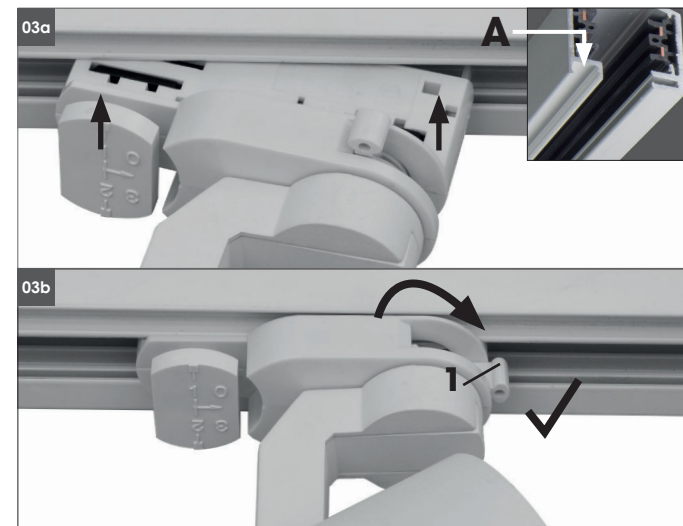


Attention! Adapter can only be installed in 3phase track in one direction. Locking mechanism must be placed on track side like marked with **A**.

03b



03a Place the luminaire in the correct position with the track adapter.
03b Lock the retaining latch **1**.

04

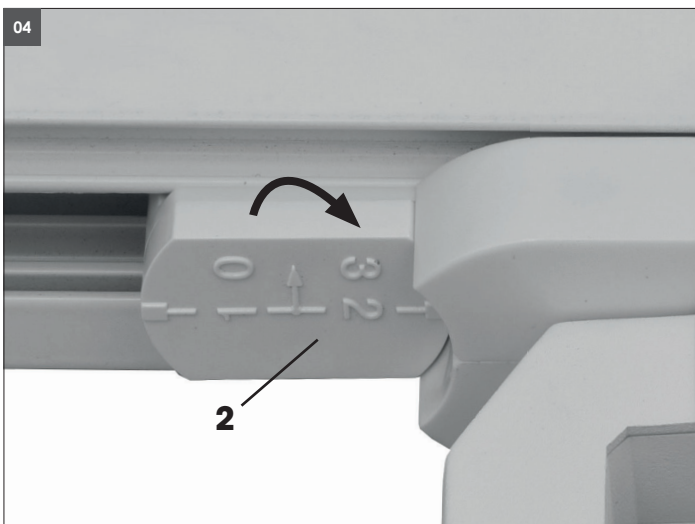

04 Set phase with side phase selection dial (**2**) for commissioning the luminaire with the contact selection switch.

Another installation / assembly / materials / types than provided in the manual sheets, release us from any electrotechnical and electrostatic responsibility.




06a After installation and connection, switch on the mains voltage all-pole. Switch on the associated circuit breaker or turn the fuse on.



Avoid looking too long in the light exit near the light, they could damage your eyes.

06a

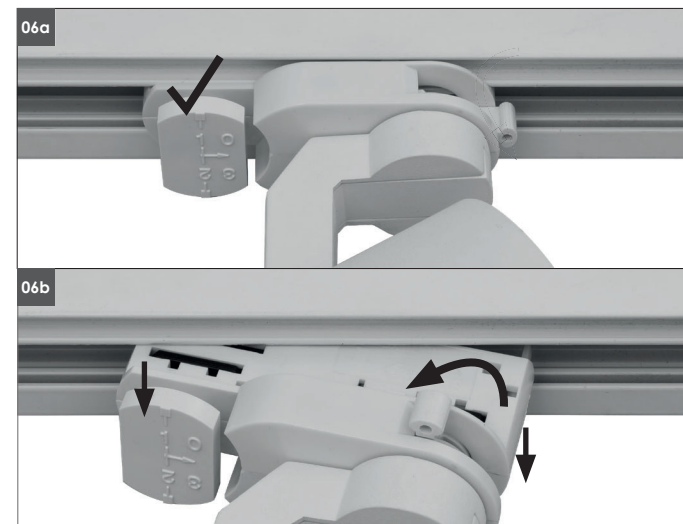

06b



Remove the spotlight



Disconnect the mains voltage from all poles before disassembly.

06a When removing, **first** set the phase wheel to **zero**
06b Release the lock and hold the spotlight with one hand!