

DESCRIPTION OF PARTS

LED pendant luminaire with driver and canopy, Ø108xH76 mm
Lamp body made of aluminium, color white, black, chrome

TECHNICAL DATA

LED pendant luminaire with driver
AC220-240V
9W
Light colour: 2700K
IP class 20
Protection class: I
Wire suspension: L5000 mm
TRIAC dimmable
Beam angle: 60°
UGR<16
CRI>90


LIGHT SOURCE

Light source A.L.S. GmbH - EP830934-1-6SW1
This luminaire contains 1 light source of energy efficiency class F


LED DRIVER

Primary voltage: 220-240V/50-60Hz 700 mA

The product consists of two components. Luminaire with light source and internal power supply.



The light source is only exchangeable by a professional.



The LED driver is only exchangeable by a professional.



Protection class I
VAM1-6SW3D



CE label



The product is only for use in interiors.



The product may not be disposed of in the household garbage.



Do not attach deco material.



TRIAC dimmable



Notification of Risks



Safety Instructions



Cleaning Instructions



It is not allowed to cover luminaires with heatinsulating cover sheet or similar materials!



Installation only by qualified and authorised persons.

SAFETY



READ THE INSTRUCTIONS BEFORE USING THIS PRODUCT.
KEEP THE SAFETY AND OPERATING INSTRUCTIONS FOR FUTURE USE.

SAFETY INFORMATION



- The light is suitable for lighting purpose indoors.
- The luminaire is not suitable for mounting on uneven surfaces, softboard. The light may otherwise fall. This can result in product damage and / or injuries. **Check the mounting surface and adjust the mounting material to the ground.**



- Do not let children play with the packaging film. Children can get caught up in it and suffocate while playing.



- Don't install under power.
- Follow the instruction manual for installation.
- Installation only by qualified and authorised persons.
- Do not use the product when it has been damaged (defective covers) or there are operational faults such as flickering, smoking, steaming, crackling noises or the smell of smoke.
- A damaged or defective product must be changed or repaired by the manufacturer, a service person or a comparable qualified person.
- Installation only under observance of the valid guidelines specific to application and country among others VDE 0.100.
- Never open one of the electrical operating agents or plug any objects into them. Such procedures signify a danger to life through electrical shock.
- Absolutely avoid contact between the product and water or other liquids. For reasons of electrical safety, the light may not be placed in contact with water or other liquids or submerged in water.
- The product may not be changed or modified.
- Make sure that the luminair is never covered by heat insulating mats or thin materials. Make sure that the product has enough space for heat dissipation.



MAINTENANCE AND CLEANING

The light source is only exchangeable by a professional.



- Do not use solvents, such as benzene and similar agents. The light would be damaged thereby.
- Only use a dry, lint-free cloth for cleaning the product.

DISPOSAL

The packaging consists of environmentally friendly materials. Dispose of them in the local recycling containers.




Do not dispose of this product in the household garbage when it has reached the end of its lifecycle, but rather take it to a disposal center. Your local officials will provide you with information about collection offices and their business hours.

VAM1

Pendant luminaire

VAM1-6SW1D
VAM1-6SW2D
VAM1-6SW3D



INTENDED USAGE

This product will only serve the purpose of illumination.

The light is only suitable for use in interiors, in dry, enclosed rooms.

SCOPE OF DELIVERY





1x LED pendant luminaire with canopy and power supply
1x Mounting set
Set of instructions for assembly, operation and safety
1x Protective gloves for chrome version

TECHNICAL CHANGES

Changes in the sense of technical progress can be made without prior notice.

address | contact

A.L.S. GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
Tel.: +49 (0) 75 42 93 44-0 | Fax.: +49 (0) 75 42 93 44-30
E-Mail: info@als.de | Web: www.als.de

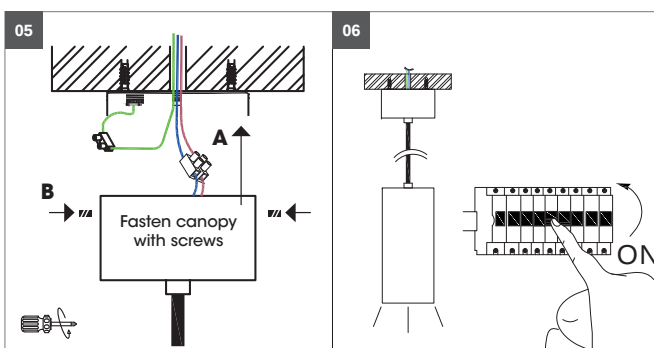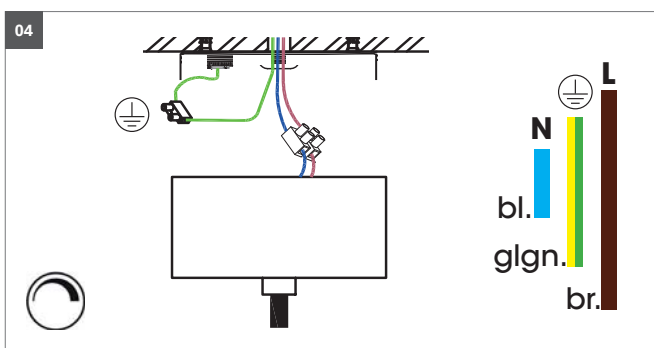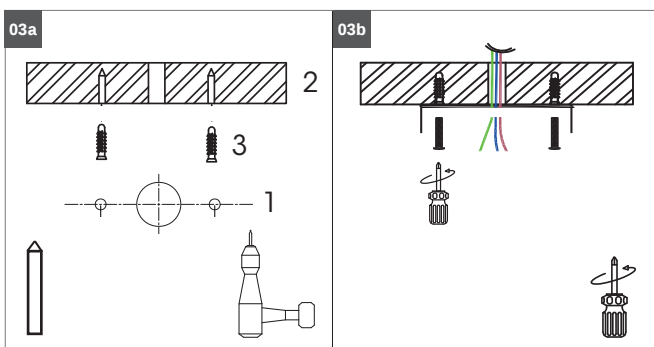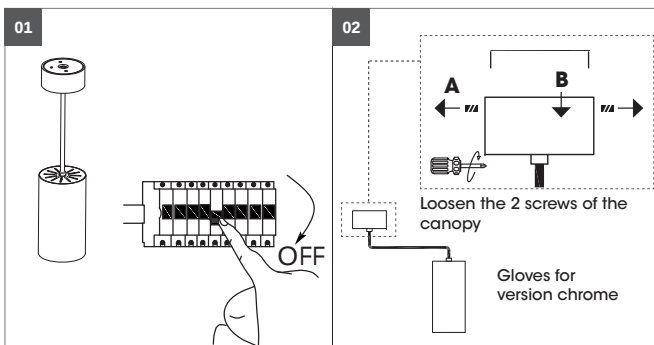

Turn Off power supply before starting any installation!
Do not connect the device under power!

Carefully remove the LED luminaire from its packaging.
 Check for damage and complete scope of delivery.

01 Switch off before installation. Switch on only after complete installation and examination of the circuit. Professional electrician for installation and maintenance only. Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.

02 Loosen 2x screw on canopy (A+B) and remove mounting bracket.

03a Transfer drilling positions of the mounting bracket to the ceiling. Drill holes in the ceiling and attach dowels. **Check for underlying installations before drilling!**

03b Fasten the mounting bracket to the ceiling with screws.

04 Connect the supply cable to the cable connection terminals of the luminaire L, N, PE according to the electrical DIN VDE 0100 regulations.

05 Place the canopy in the correct position on the mounting bracket and tighten the screws on the side. Check that it is firmly fixed.

06 After installation and connection, switch on all poles of the mains voltage. To do this, switch on the associated circuit breaker or turn on the fuse. Also switch on the associated residual current circuit breaker so that all poles of the mains supply line are connected to the mains voltage.



Another installation / assembly / materials / types than provided in the manual sheets, release us from any electrotechnical and electrostatic responsibility.

Fixing materials:

The warranty is void if the buyer or a third party repairs or modifies the luminaire.



Looking into the light output for too long can damage the eyes!