
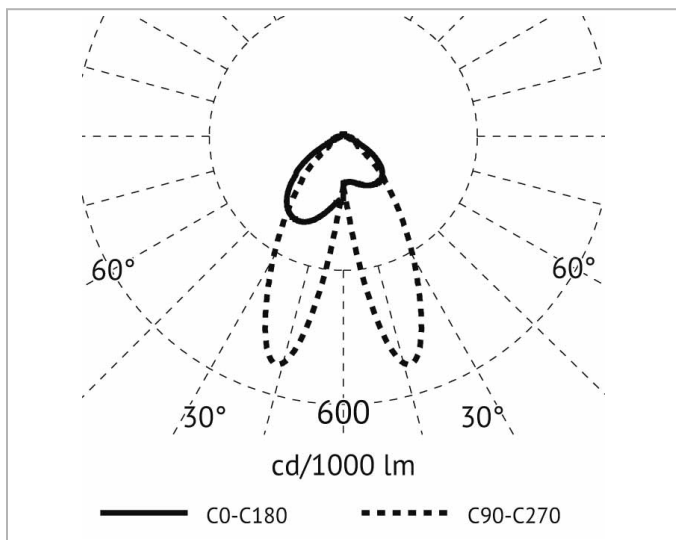


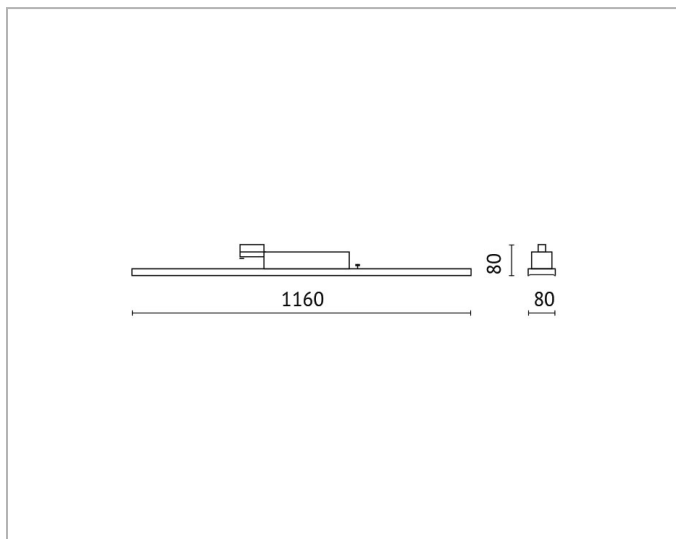

Description

LED linear track light, alu-die-cast, LED 40W, 4000K, integrated power supply, with 3-Ph.adapter, black body, length: 1160mm, beam angle double asymmetrical,

General data

Adjustability:	Not adjustable
Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	146lm/W
Luminous flux:	5832lm
Max. system power:	40W
Rated luminous flux according to IEC 62722-2-1:	5832lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	23

Electrical data

Connection type:	Busbar adapter
-------------------------	----------------



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Exchangeable control gear:

Yes

No dim function:

Yes

Nominal voltage:

220V - 240V

Voltage type:

AC

With control gear:

Yes

Product dimensions

Height/depth:



80mm

Length:

1160mm

Width:

80mm

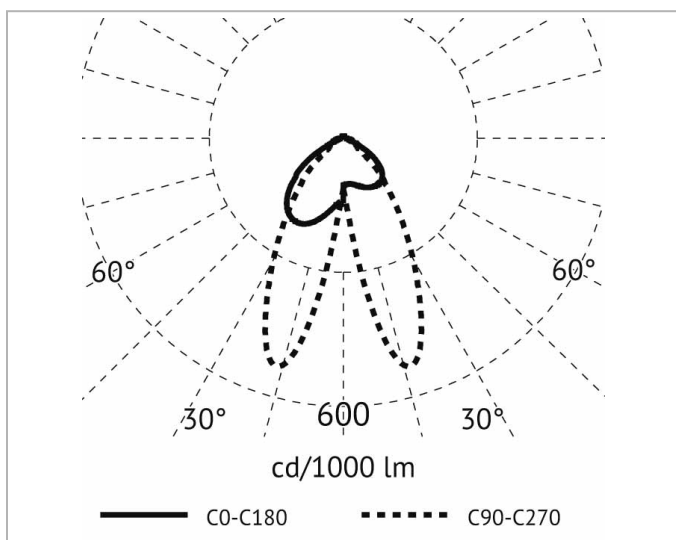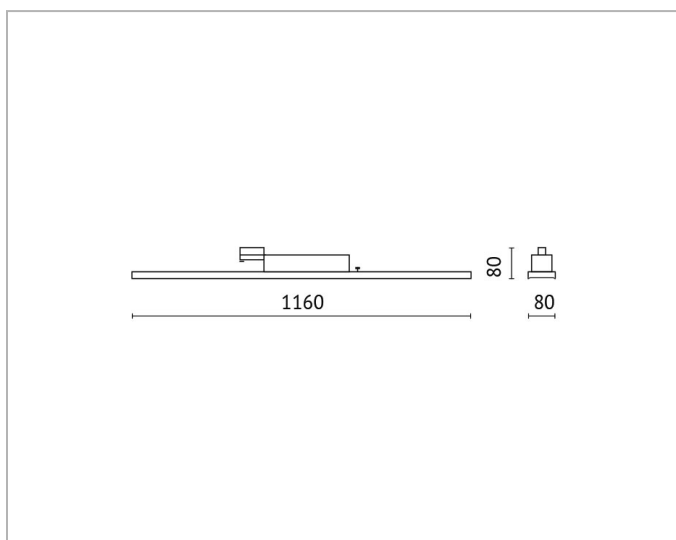

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de