
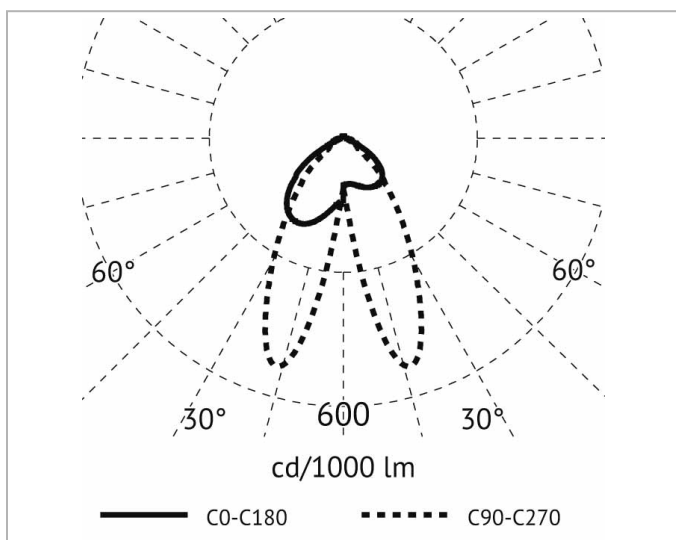


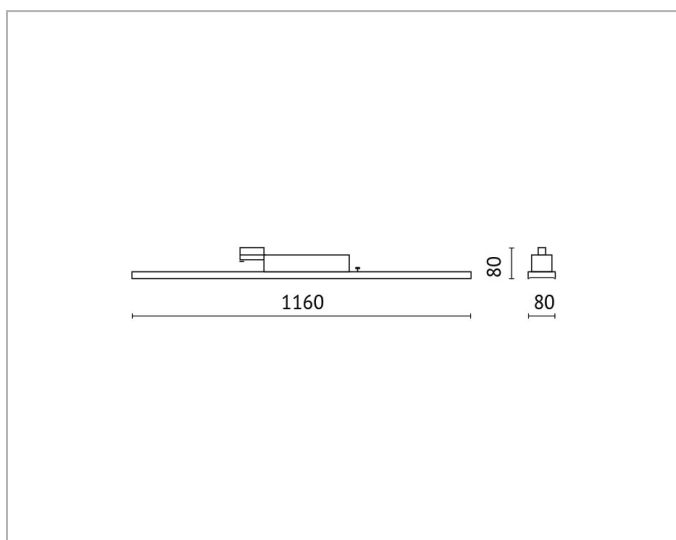

Description

BRICK LED linear luminaire, DALI ONETRACK, 40W, 3000K, CRI <90, with track 3-Ph. adapter, integrated DALI power supply unit, beam angle dbl. asymmetrical, die-cast aluminum housing, housing color white

General data

Adjustability:	Not adjustable
Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Max. system power:	40W
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
Dimming DALI:	Yes
Exchangeable control gear:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Downlight/spot/floodlight

BRI-40WW11DADDO



Product dimensions

Height/depth:	80mm
Length:	1160mm
Width:	80mm

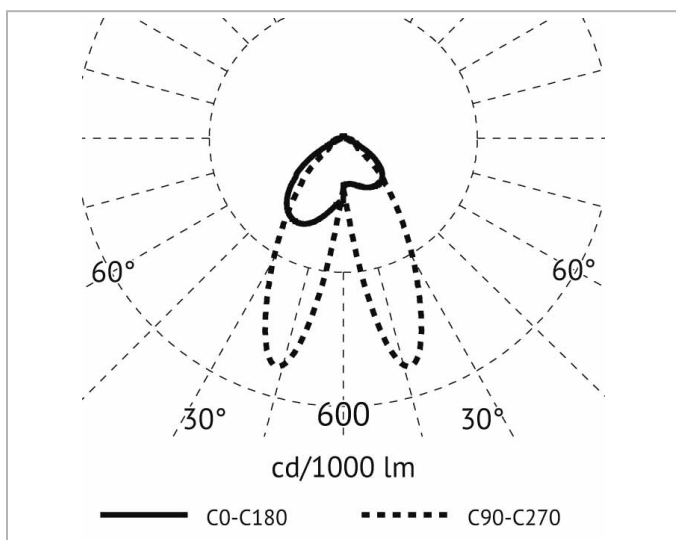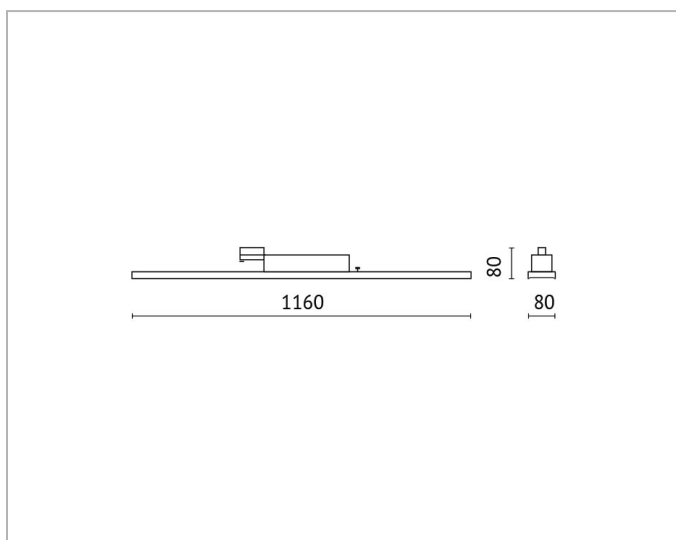

Misprints and errors excepted. Drawings and pictures are sketches. Dimensions and technical data are approximate. Length specifications without unit in millimeters. The Object photos shown are examples of applications independent of the actual effect. We reserve the right to make changes to the range, technology and design (without prior notice). Color deviations are due to printing technology, possible.

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de