
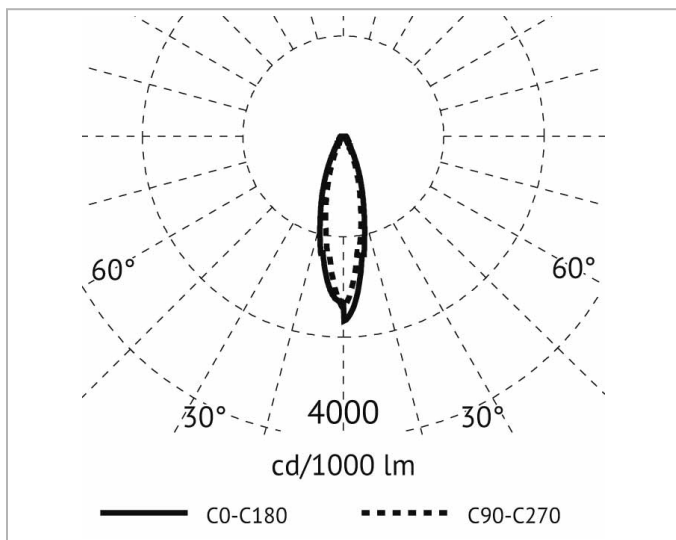


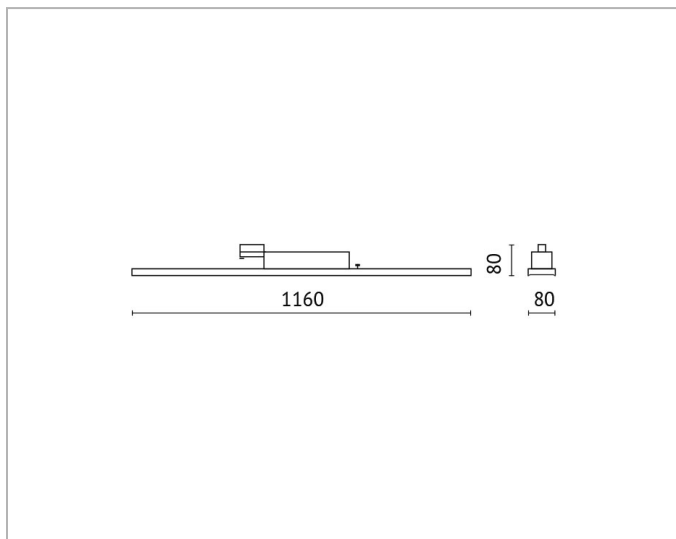

## Description

BRICK LED linear luminaire, DALI ONETRACK, 40W, 3000K, CRI <90, with track 3-Ph. adapter, integrated DALI power supply unit, beam angle 30°, die-cast aluminum housing, housing color white

## General data

|                                           |                |
|-------------------------------------------|----------------|
| <b>Adjustability:</b>                     | Not adjustable |
| <b>Colour housing:</b>                    | White          |
| <b>Degree of protection (IP):</b>         | IP20           |
| <b>Lamp holder:</b>                       | None           |
| <b>Material housing:</b>                  | Aluminium      |
| <b>Protection class:</b>                  | I              |
| <b>Suitable for light-track mounting:</b> | Yes            |
| <b>Surface protection:</b>                | Powder coating |

## Photometric data

|                                      |                    |
|--------------------------------------|--------------------|
| <b>Beam angle:</b>                   | Medium beam 21-40° |
| <b>Colour of light:</b>              | White              |
| <b>Colour rendering index CRI:</b>   | 90-100             |
| <b>Colour temperature:</b>           | 3000K              |
| <b>Light outlet:</b>                 | Direct             |
| <b>Light sharing:</b>                | Symmetric          |
| <b>Max. system power:</b>            | 40W                |
| <b>Suitable for number of lamps:</b> | 1                  |

## Electrical data

|                                   |                |
|-----------------------------------|----------------|
| <b>Connection type:</b>           | Busbar adapter |
| <b>Dimming DALI:</b>              | Yes            |
| <b>Exchangeable control gear:</b> | Yes            |
| <b>Nominal voltage:</b>           | 220V - 240V    |
| <b>Voltage type:</b>              | AC             |
| <b>With control gear:</b>         | Yes            |

## Product dimensions



## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de

Downlight/spot/floodlight

BRI-40WW11DDO



**Height/depth:**



80mm

**Length:**

1160mm

**Width:**

80mm

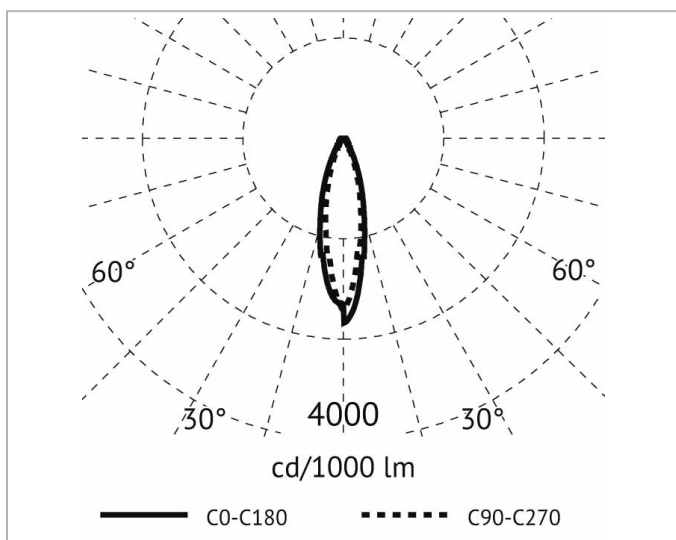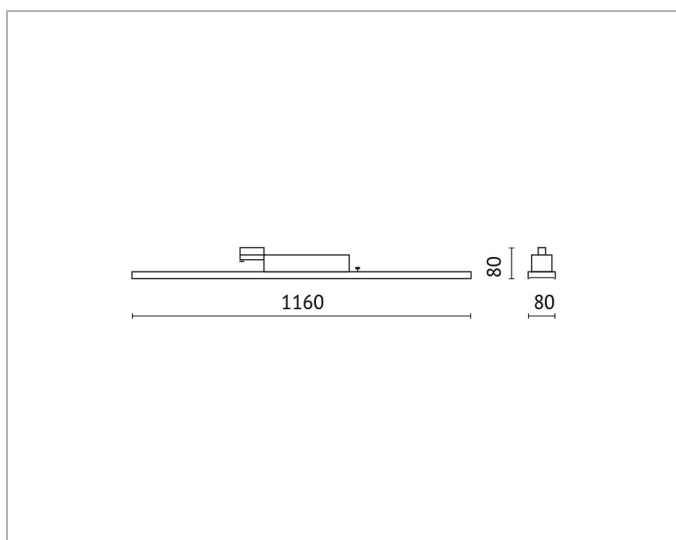

Misprints and errors excepted. Drawings and pictures are sketches. Dimensions and technical data are approximate. Length specifications without unit in millimeters. The Object photos shown are examples of applications independent of the actual effect. We reserve the right to make changes to the range, technology and design (without prior notice). Color deviations are due to printing technology, possible.

**Adress/Contact**

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)