


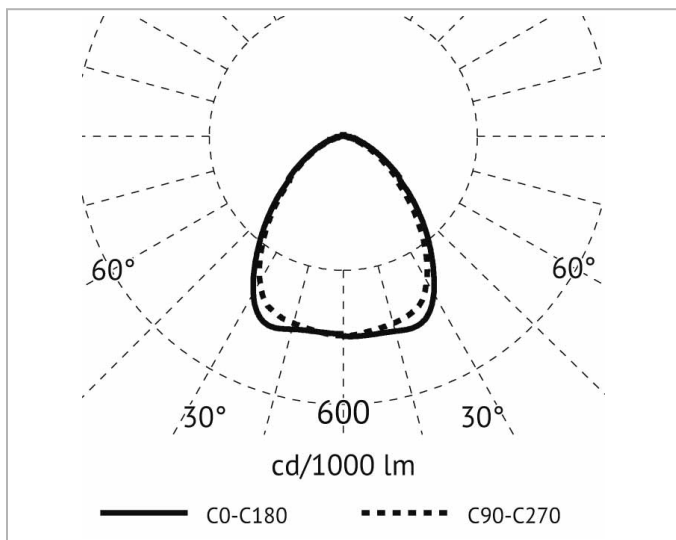

Description

LED linear track light, alu-die-cast, LED 40W, integrated power supply, with 3-Ph.adapter, white body, length: 1160mm, beam angle 90°

General data

Adjustability:	Not adjustable
Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Extreme wide beam >80°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	131lm/W
Luminous flux:	5236lm
Max. system power:	40W
Rated luminous flux according to IEC 62722-2-1:	5236lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	23

Electrical data

Connection type:	Busbar adapter
Exchangeable control gear:	Yes



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	80mm
Length:	1160mm
Width:	80mm

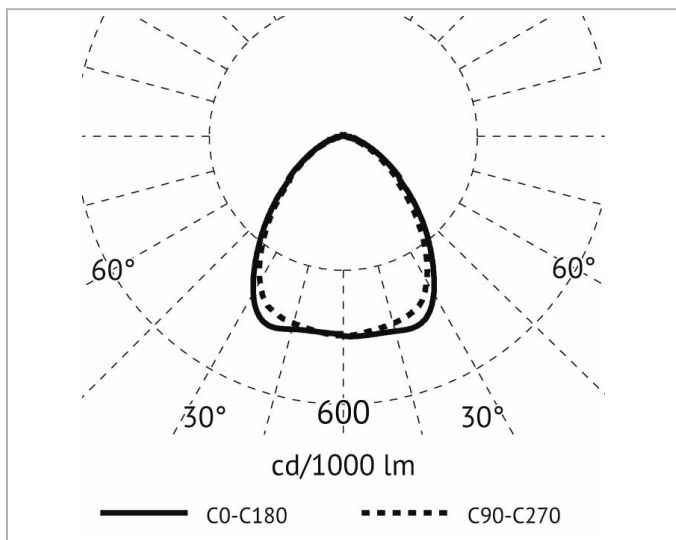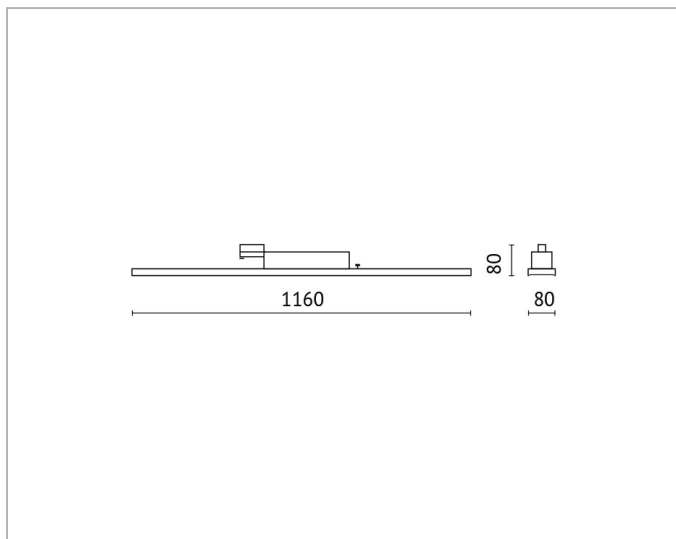

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de