


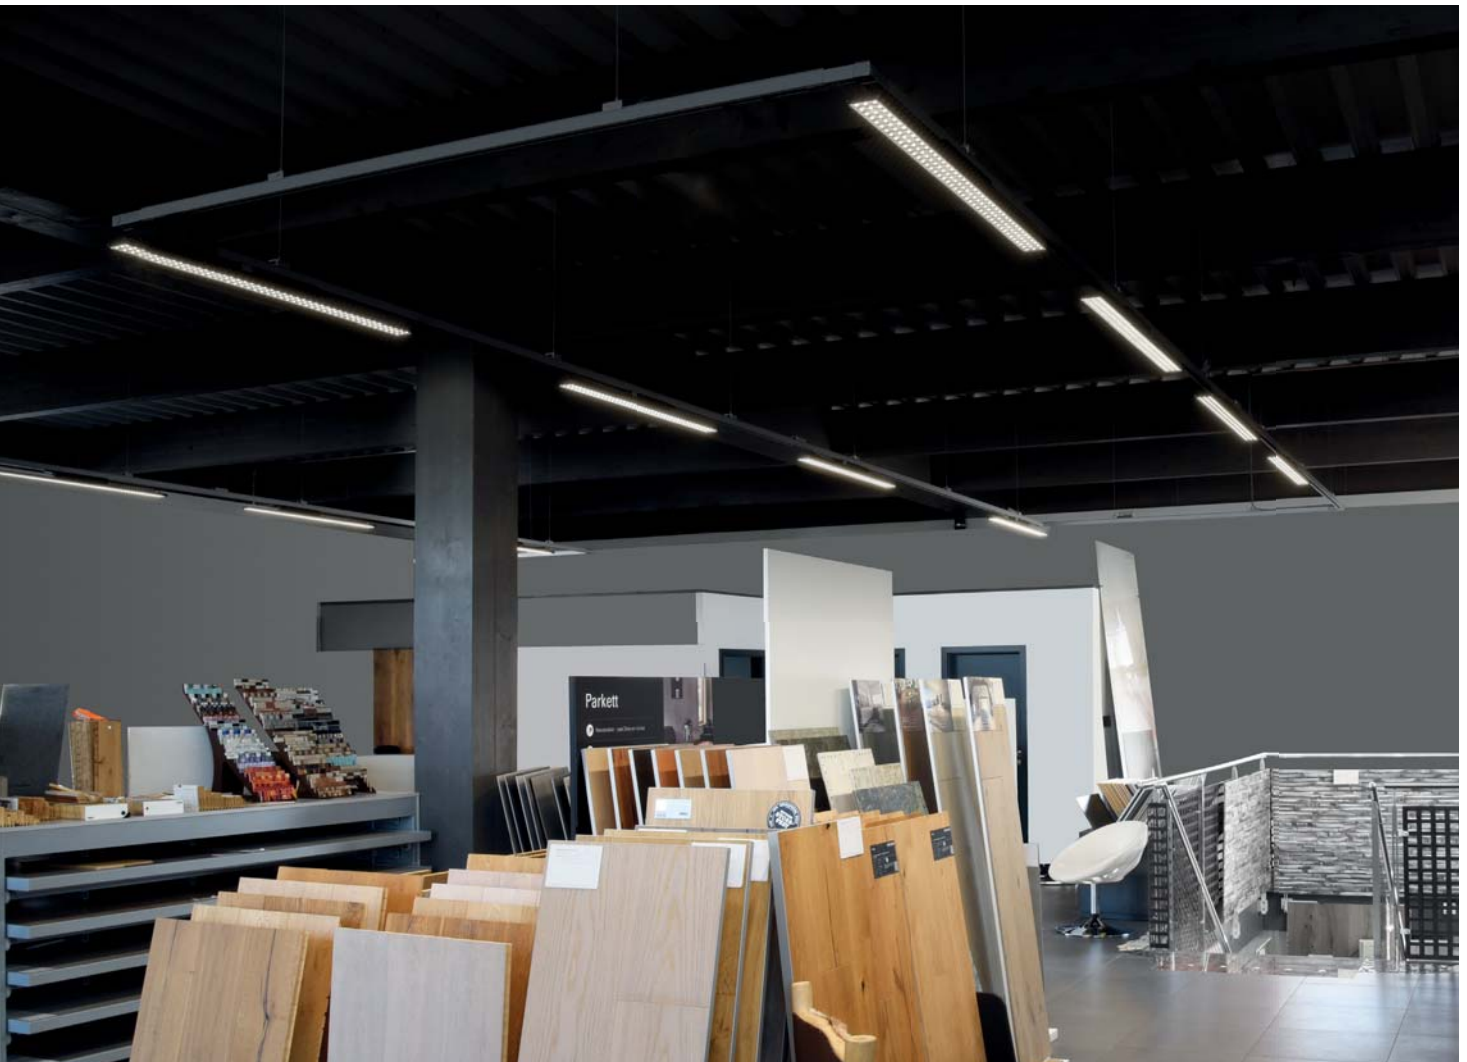

- Lineare LED Stromschienenleuchte
- Mit 3-Phasen Adapter
- Integriertes elektronisches Versorgungsteil von namhaften Hersteller wie Osram, Philips, Tridonic etc.
- Gehäuse Alu-Druckguss, pulverbeschichtet schwarz oder weiß
- Ausstrahlwinkel: 30/90° sowie doppelt asymmetrisch
- CRI >90
- Schutzart: IP20
- Schutzklasse: I

Auf Anfrage

- Gehäusefarbe alu-grau
- Dimmbar über Phasenabschnitt

- Linear LED power-track-light
- With 3-phase adapter
- Built in electronic power supply from well-known manufacturers like Osram, Philips, Tridonic etc.
- Body aluminum die-cast, powder coated black or white
- Beam angle: 30/90 ° and double asymmetrical
- CRI >90
- Protection Rating: IP20
- Protection Class: I

On request

- Housing colour aluminium-grey
- Dimmable with phase cut (trailing edge)



BRICK | 220-240 V | 50/60 Hz | LED | CRI 90



L1160*B/W80*H80 mm

30°   **40 W**

4000 K **BRI-40NW11** **BRI-40NW12** 5080 lm

3000 K **BRI-40WW11** **BRI-40WW12** 4870 lm

90° **40 W**

4000 K **BRI-40NW11F** **BRI-40NW12F** 5454 lm

3000 K **BRI-40WW11F** **BRI-40WW12F** 5236 lm

Doppelt asymmetrisch | Double asymmetrical **40 W**

4000 K **BRI-40NW11DA** **BRI-40NW12DA** 5832 lm

3000 K **BRI-40WW11DA** **BRI-40WW12DA** 5599 lm



BRICK | 220-240 V | 50/60 Hz | LED | CRI 90



L1160*B/W80*H80 mm

30°   **60 W**

4000 K **BRI-60NW11** **BRI-60NW12** 8142 lm

3000 K **BRI-60WW11** **BRI-60WW12** 7816 lm

90° **60 W**

4000 K **BRI-60NW11F** **BRI-60NW12F** 7771 lm

3000 K **BRI-60WW11F** **BRI-60WW12F** 7460 lm





Doppelt asymmetrisch | Double asymmetrical **60 W**

4000 K **BRI-60NW11DA** **BRI-60NW12DA** 8761 lm

3000 K **BRI-60WW11DA** **BRI-60WW12DA** 8411 lm

Ausführung DALI ONETRACK | Version DALI ONETRACK

Code + **DDO (BRI-60WW11DADDO)**



Farben | Colors

 Weiß | White

 Schwarz | Black