
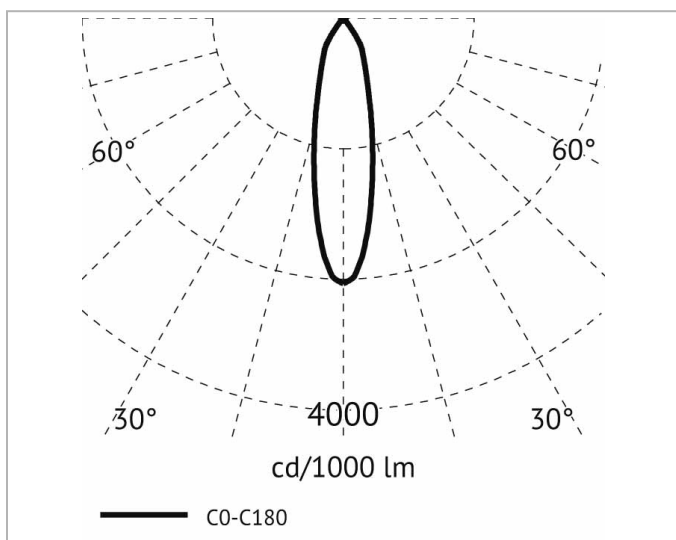


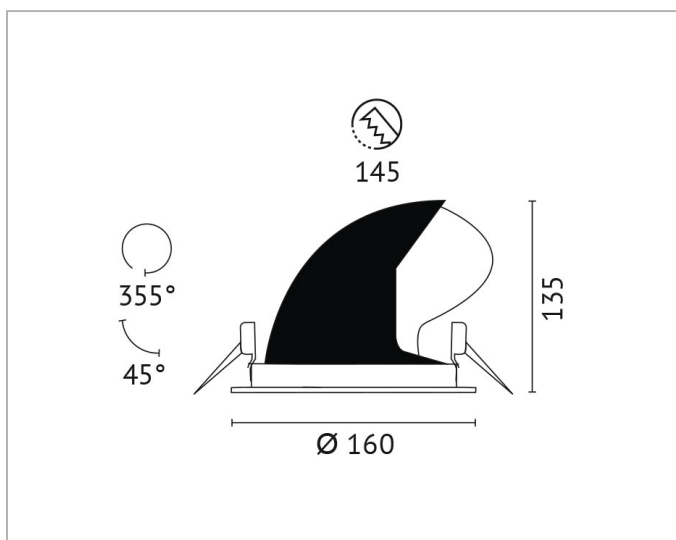

Description

BWL, Recessed downlight, COB LED 27W, 3500K, 750mA, 30° beam angle, 45° pivoting, CRI >90, incl. power supply, body black with white front ring

General data

Adjustability:	Rotating and swivelling
Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	II
Suitable for built-in mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Medium beam 21-40°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	3500K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	121lm/W
Luminous flux:	3226lm
Max. system power:	27W
Rated luminous flux according to IEC 62722-2-1:	3226lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	20.50

Electrical data



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Exchangeable control gear:

Yes

No dim function:

Yes

Nominal current:

750mA

Nominal voltage:

220V - 240V

Voltage type:

AC

With control gear:

Yes

Product dimensions

Built-in diameter:

150mm

Built-in height/depth:



135mm

Height/depth:

135mm

Outer diameter:

160mm

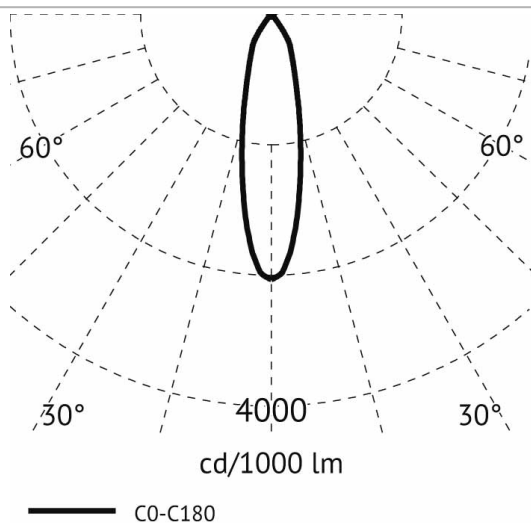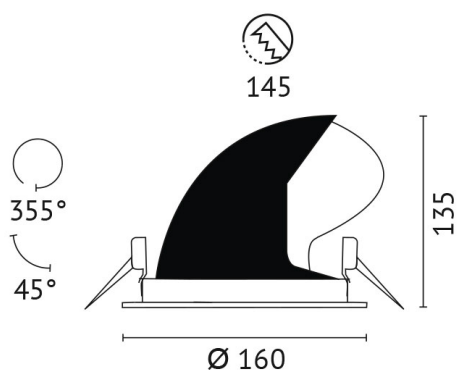

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de