
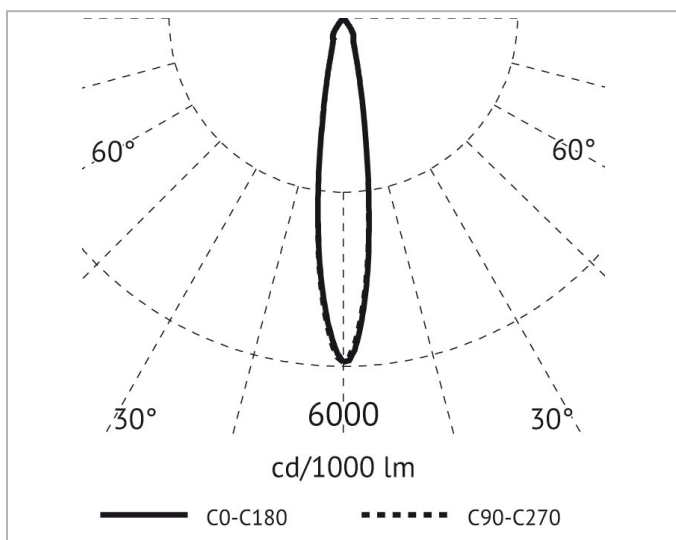


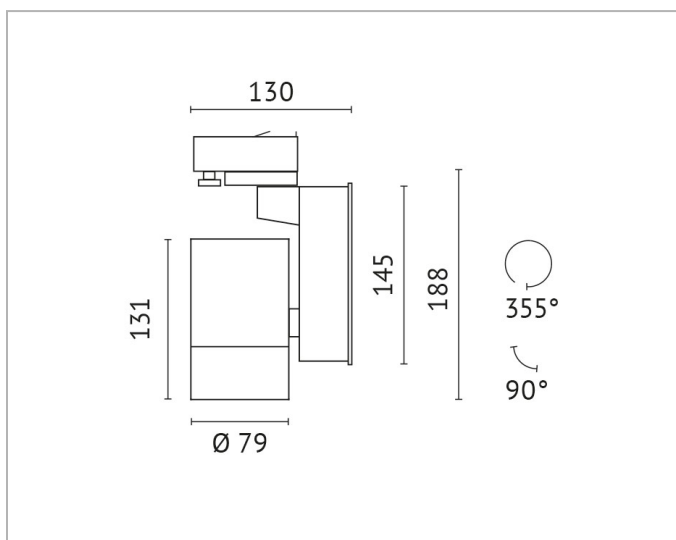

Description

BWS, track spotlight, CoB LED, 27W, warm white 3500K, 700mA, with 3-phase adapter, including power supply, rotatable, 15° reflector, clear protective glass, white housing, for ONETRACK

General data

Adjustability:	Rotating and swivelling
Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Narrow beam 11 - 20°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	3500K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	120lm/W
Luminous flux:	3242lm
Max. system power:	27W
Rated luminous flux according to IEC 62722-2-1:	3242lm
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
Dimming DALI:	Yes



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Downlight/spot/floodlight

BWS-30WNW11-1SDDO



Exchangeable control gear:

Yes

Nominal current:

700mA

Nominal voltage:

220V - 240V

Voltage type:

AC

With control gear:

Yes

Product dimensions

Height/depth:

188mm

Length:



130mm

Outer diameter:

79mm

Width:

79mm

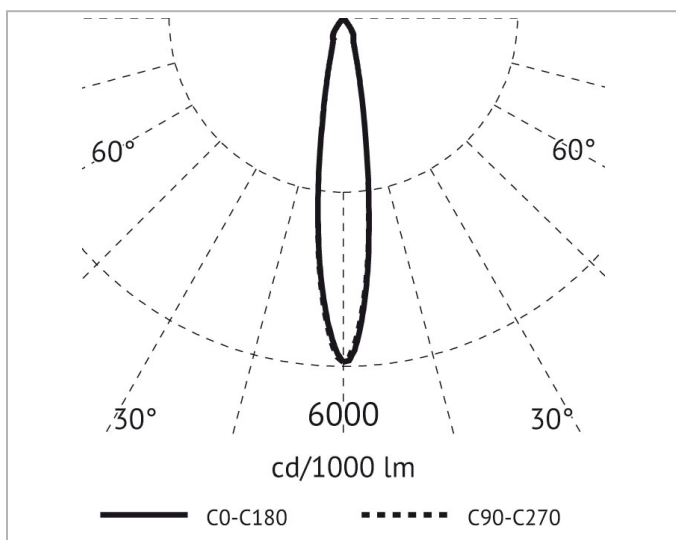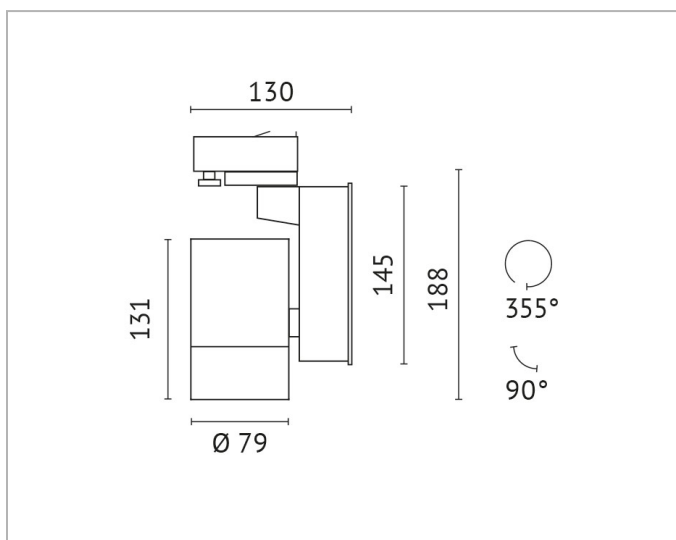

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de