
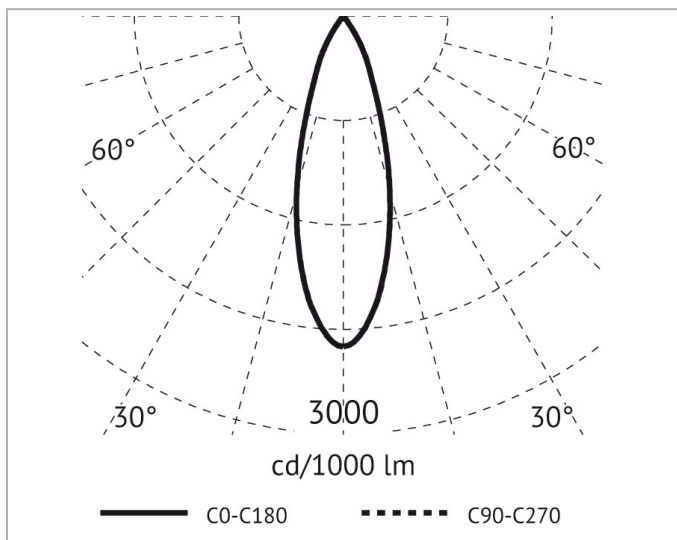


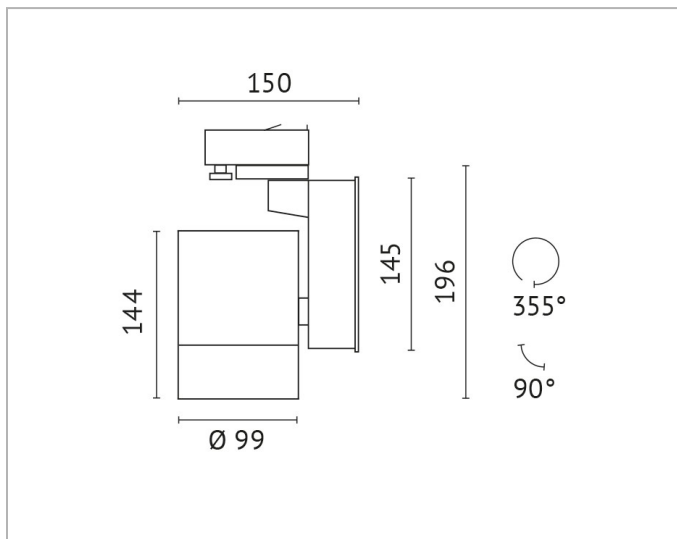

## Description

BWS, Spotlight for contact track, CoB LED, 40W, 4000K, 1050mA, CRI >80, mit 3-phasen-adapter, incl. power supply, 24° beam angel, clear tempered glass, body white

## General data

|                                           |                         |
|-------------------------------------------|-------------------------|
| <b>Adjustability:</b>                     | Rotating and swivelling |
| <b>Colour housing:</b>                    | White                   |
| <b>Degree of protection (IP):</b>         | IP20                    |
| <b>Lamp holder:</b>                       | None                    |
| <b>Material housing:</b>                  | Aluminium               |
| <b>Protection class:</b>                  | I                       |
| <b>Suitable for light-track mounting:</b> | Yes                     |
| <b>Surface protection:</b>                | Powder coating          |

## Photometric data

|                                                        |                    |
|--------------------------------------------------------|--------------------|
| <b>Beam angle:</b>                                     | Medium beam 21-40° |
| <b>Colour consistency (McAdam ellipse):</b>            | SDCM3              |
| <b>Colour of light:</b>                                | White              |
| <b>Colour rendering index CRI:</b>                     | 90-100             |
| <b>Colour temperature:</b>                             | 4000K              |
| <b>Light outlet:</b>                                   | Direct             |
| <b>Light sharing:</b>                                  | Symmetric          |
| <b>Luminaire efficacy:</b>                             | 135lm/W            |
| <b>Luminous flux:</b>                                  | 5257lm             |
| <b>Max. system power:</b>                              | 39W                |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 5257lm             |
| <b>Suitable for number of lamps:</b>                   | 1                  |

## Electrical data

|                         |                |
|-------------------------|----------------|
| <b>Connection type:</b> | Busbar adapter |
|-------------------------|----------------|



## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de



**Exchangeable control gear:**

Yes

**No dim function:**

Yes

**Nominal current:**

700mA

**Nominal voltage:**

220V - 240V

**Voltage type:**

AC

**With control gear:**

Yes

**Product dimensions**

**Built-in diameter:**

- mm

**Height/depth:**

196mm

**Length:**



150mm

**Outer diameter:**

99mm

**Width:**

99mm

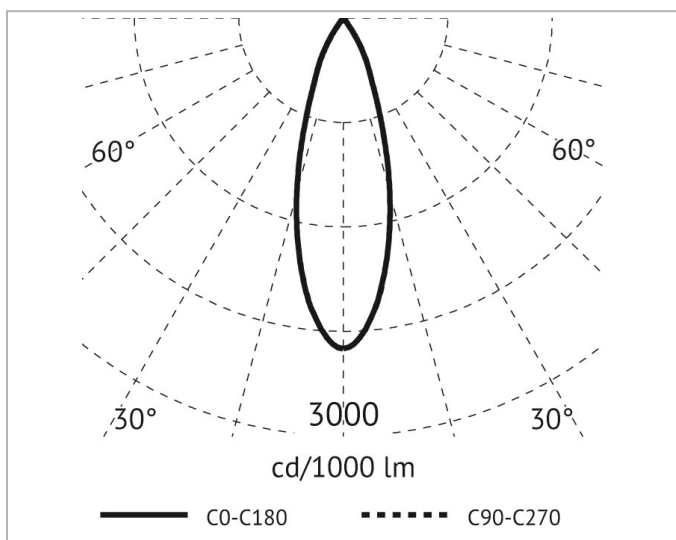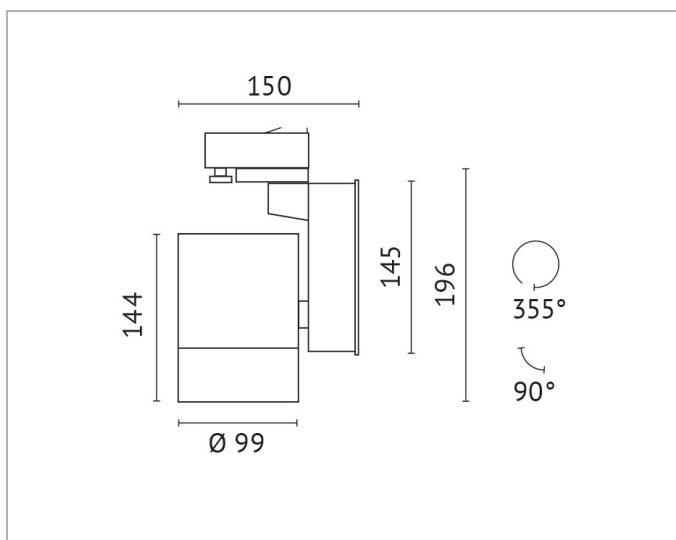

**Adress/Contact**

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)