
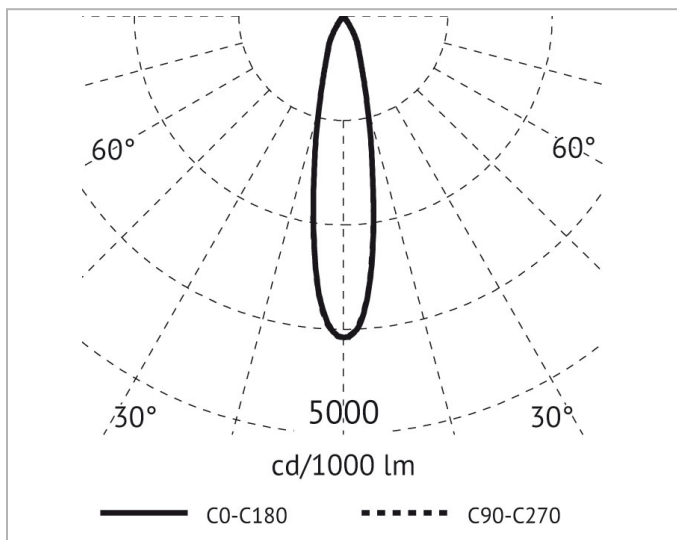


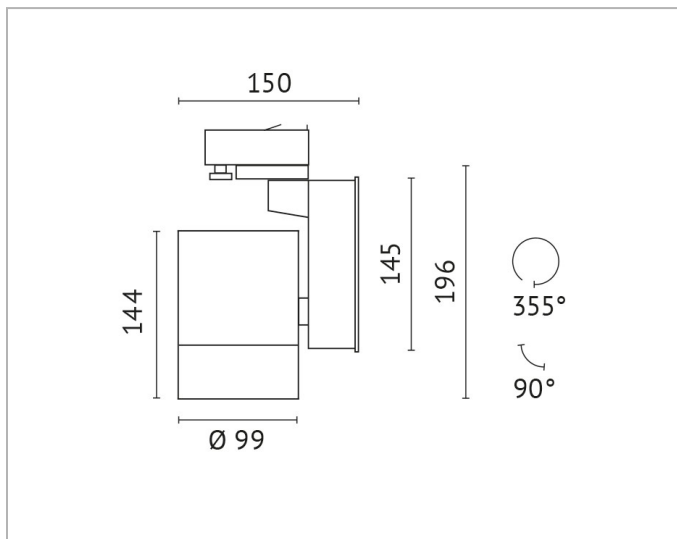

Description

BWS, Spotlight for contact track, CoB LED, 40W, 2700K, 1050mA, CRI >80, mit 3-phasen-adapter, incl. power supply, 15° beam angel, clear tempered glass, body and heat sink white

General data

Adjustability:	Rotating and swivelling
Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Narrow beam 11 - 20°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	2700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	128lm/W
Luminous flux:	4979lm
Max. system power:	39W
Rated luminous flux according to IEC 62722-2-1:	4979lm
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
-------------------------	----------------



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Exchangeable control gear:

Yes

No dim function:

Yes

Nominal current:

700mA

Nominal voltage:

220V - 240V

Voltage type:

AC

With control gear:

Yes

Product dimensions

Built-in diameter:

- mm

Height/depth:

196mm

Length:



150mm

Outer diameter:

99mm

Width:

99mm

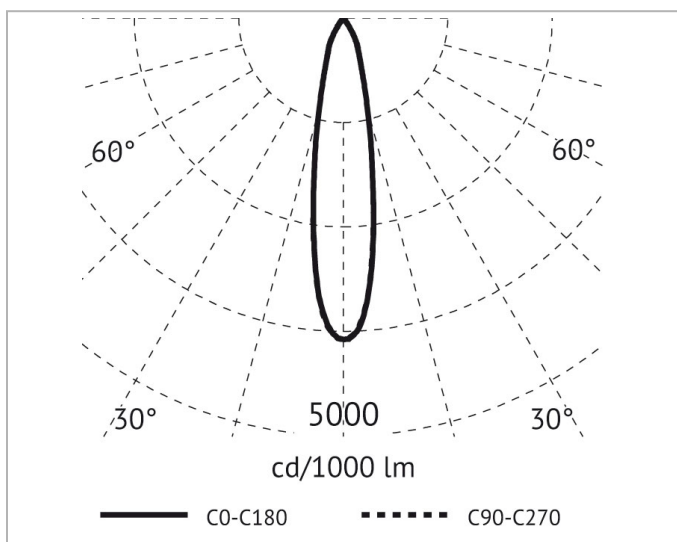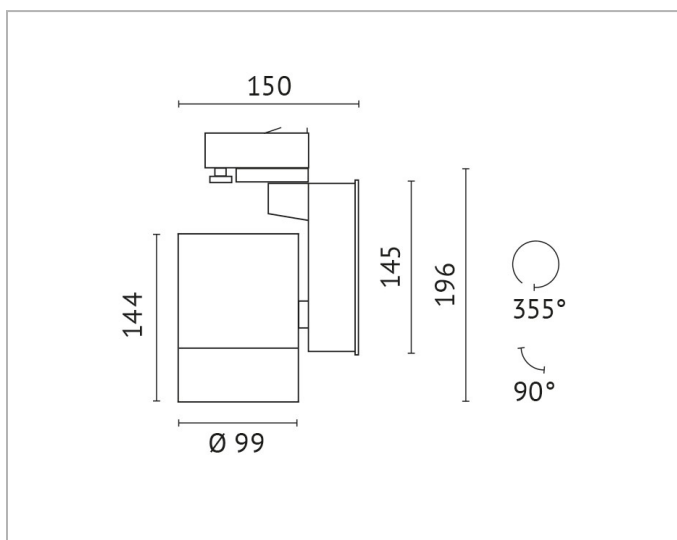

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de