




Description

BWS, Spotlight for contact track, CoB LED, 39W, 3500K, 1050mA, DALI dimmable, CRI >80, mit 3-phasen-adapter, incl. power supply, 40° beam angel, clear tempered glass, body and heat sink white, OneTrack


General data

Adjustability:	Rotating and swivelling
Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

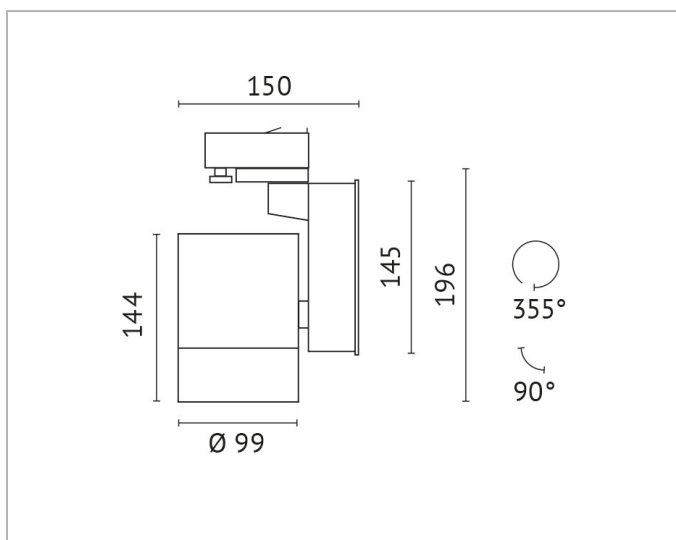

Photometric data

Beam angle:	Medium beam 21-40°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	3500K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	136lm/W
Luminous flux:	5294lm
Max. system power:	39W
Rated luminous flux according to IEC 62722-2-1:	5294lm
Suitable for number of lamps:	1

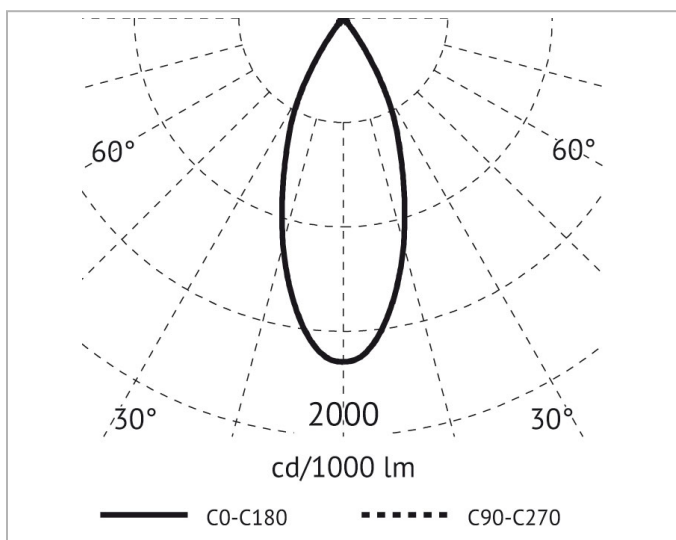

Electrical data

Connection type:	Busbar adapter
-------------------------	----------------



Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Downlight/spot/floodlight



BWS-40WNW11-1FDDO



Dimming DALI:	Yes
Exchangeable control gear:	Yes
Nominal current:	700mA
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	196mm
Length:	150mm
Outer diameter:	99mm
Width:	99mm

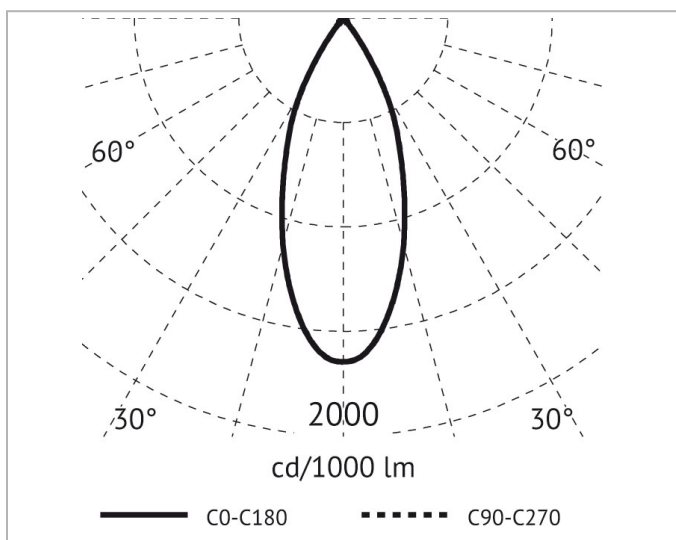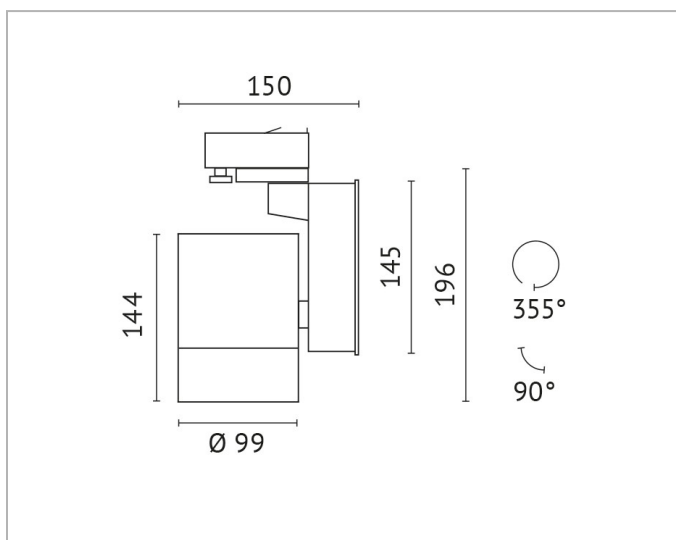

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de