
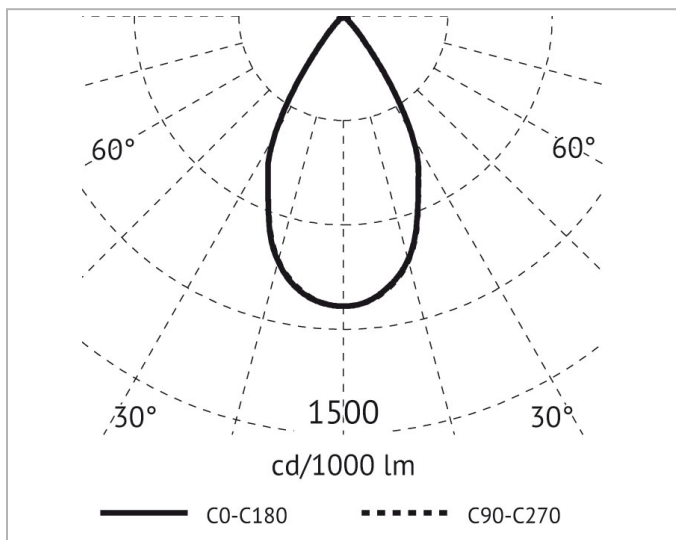


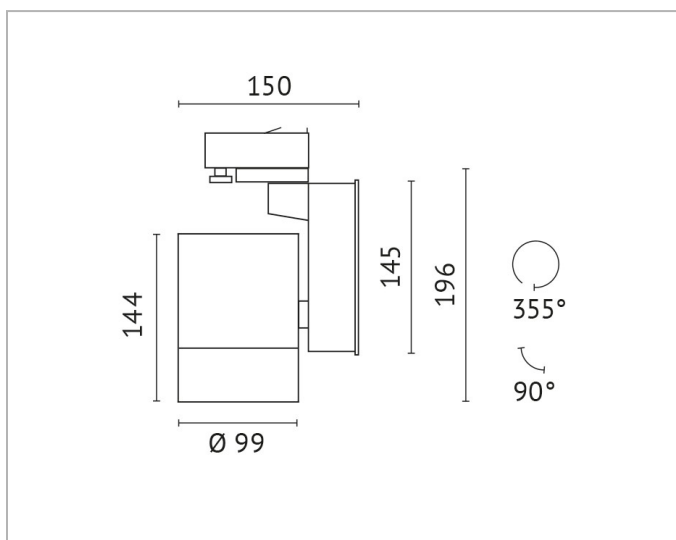

Description

BWS, Spotlight for contact track, CoB LED, 39W, 3500K, 1050mA, DALI dimmable, CRI >80, mit 3-phasen-adapter, incl. power supply, 60° beam angel, clear tempered glass, body and heat sink black, OneTrack

General data

Adjustability:	Rotating and swivelling
Colour housing:	Black
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for light-track mounting:	Yes
Surface protection:	Powder coating

Photometric data

Beam angle:	Wide beam 41-80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	3500K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	132lm/W
Luminous flux:	5166lm
Max. system power:	39W
Rated luminous flux according to IEC 62722-2-1:	5166lm
Suitable for number of lamps:	1

Electrical data

Connection type:	Busbar adapter
-------------------------	----------------



Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Downlight/spot/floodlight



BWS-40WNW12-60DDO



Dimming DALI:	Yes
Exchangeable control gear:	Yes
Nominal current:	700mA
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	196mm
Length:	150mm
Outer diameter:	99mm
Width:	99mm

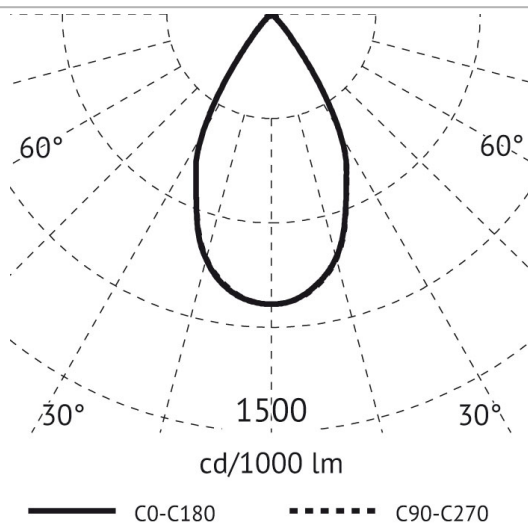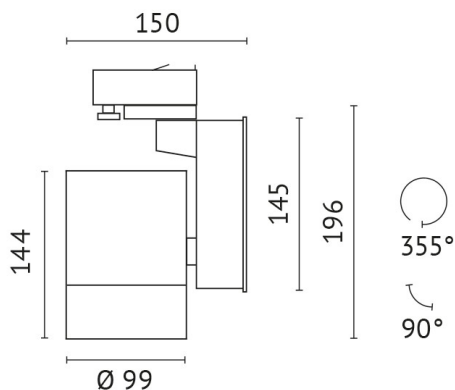

Misprints and errors excepted. Drawings and pictures are sketches. Dimensions and technical data are approximate. Length specifications without unit in millimeters. The Object photos shown are examples of applications independent of the actual effect. We reserve the right to make changes to the range, technology and design (without prior notice). Color deviations are due to printing technology, possible.

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de