
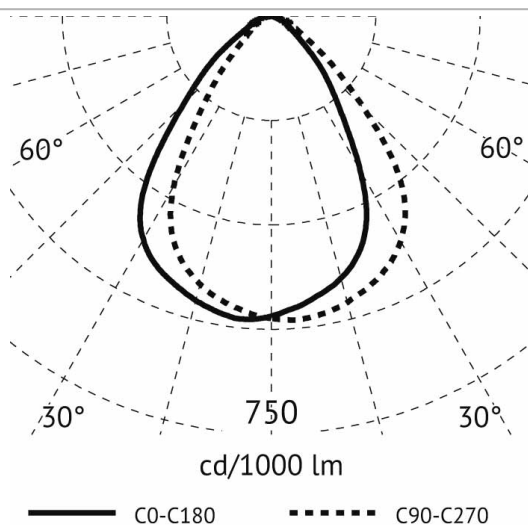
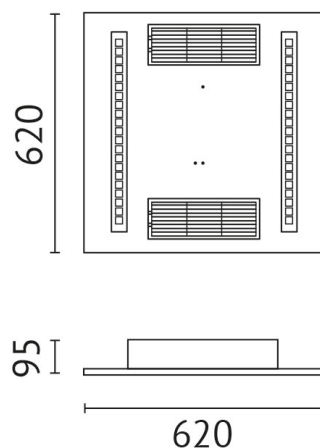


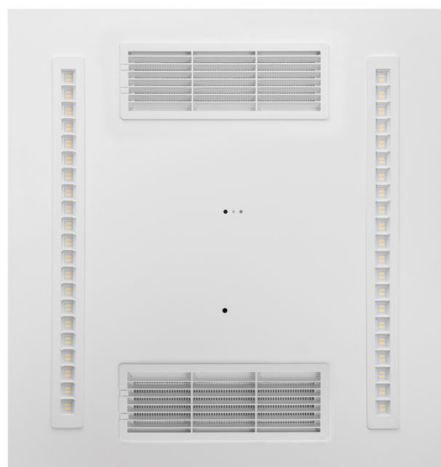

Description

UV Air germicidal panel 43W, LED 30W $\pm 10\%$, 11W
UVC lamp + Fan $\sim 1,44W$, 4000K, CRI>80, 121lm/w,
90° beam angle, UGR<16, incl. Tridonic driver,
without remote control

General data

Colour housing:	White
Degree of protection (IP):	IP20
Material housing:	Steel
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	121lm/W
Max. system power:	29W
Rated luminous flux according to IEC 62722-2-1:	3521lm
Suitable for number of lamps:	2
Suitable for workplace according to EN 12464-1:	Yes
Unified Glare Ratio (UGR):	13.05


Electrical data

Exchangeable control gear:	Yes
-----------------------------------	-----



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

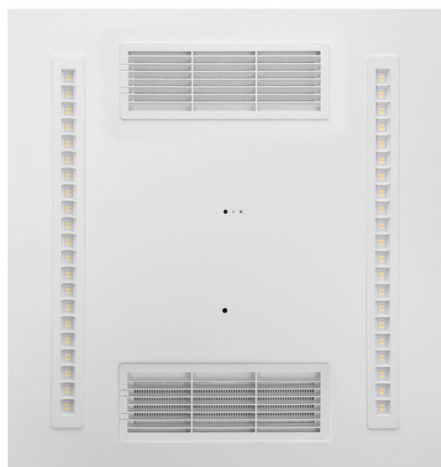

No dim function: Yes
Nominal voltage: 230V
Voltage type: AC

Product dimensions

Height/depth: 95mm
Length: 620mm
Width: 620mm

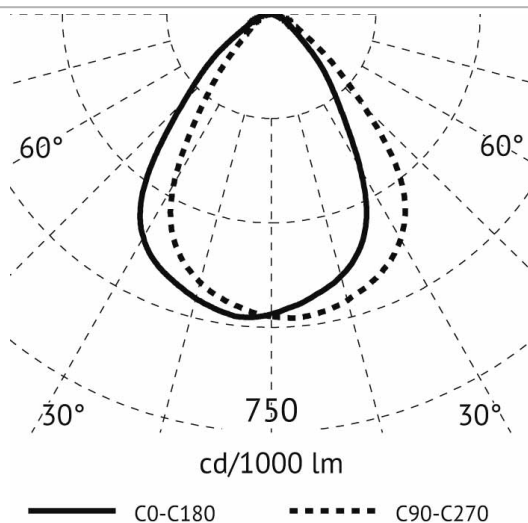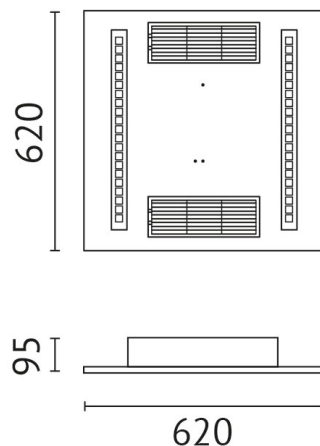

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de