
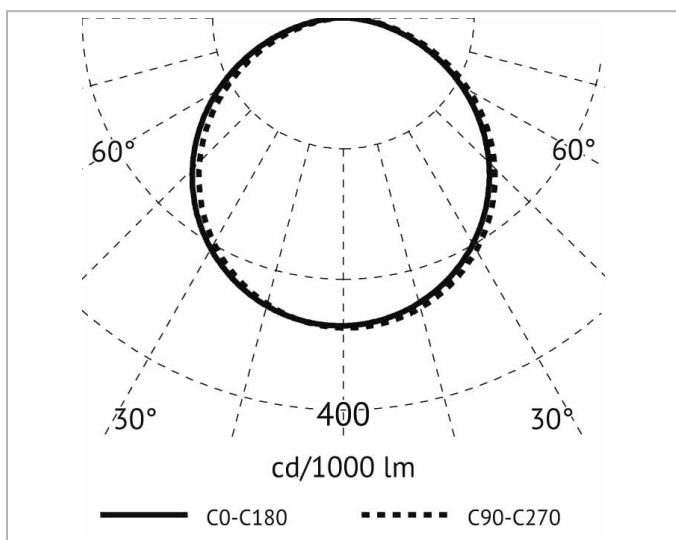


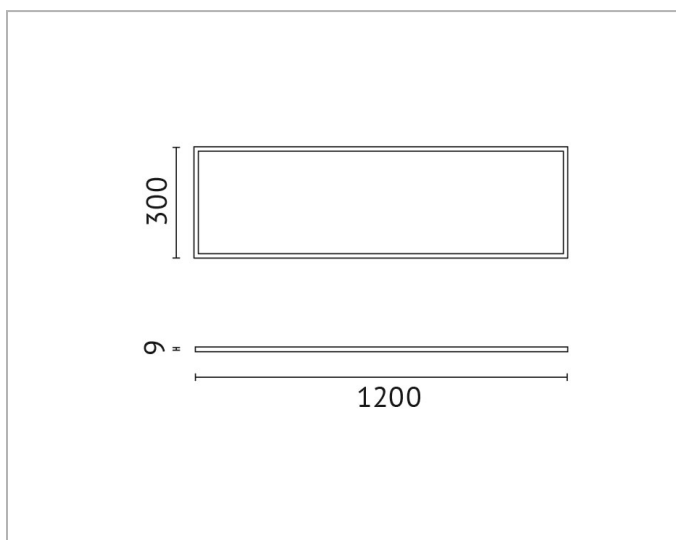

Description

DDH, recessed ceiling light, module 1200x300mm, LED 1x40W, DALI, UGR<19, 4000K, CRI>80, 220-240V, prismatic diffuser, incl. external power supply unit, IP20, white frame

General data

Colour housing:	White
Degree of protection (IP):	IP20
Protection class:	II
Suitable for built-in mounting:	Yes
Suitable for ceiling mounting:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	102lm/W
Max. system power:	40W
Rated luminous flux according to IEC 62722-2-1:	4096lm
Suitable for number of lamps:	2
Suitable for workplace according to EN 12464-1:	Yes
Unified Glare Ratio (UGR):	18.65

Electrical data

Dimming DALI:	Yes
Exchangeable control gear:	Yes



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Nominal voltage: 220V - 240V
Voltage type: AC

Product dimensions

Built-in height/depth: 9mm
Built-in length: 1200mm
Built-in width: 300mm
Length: 1200mm

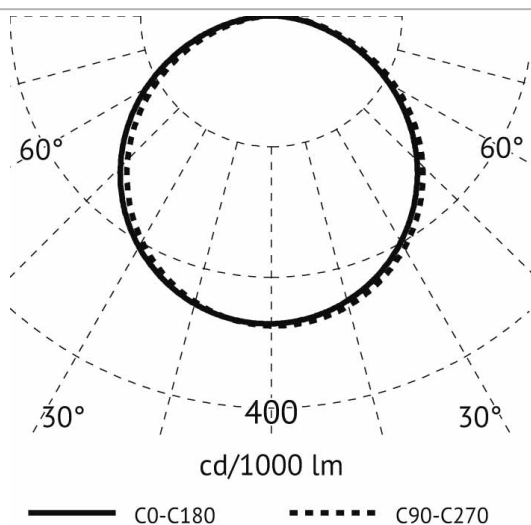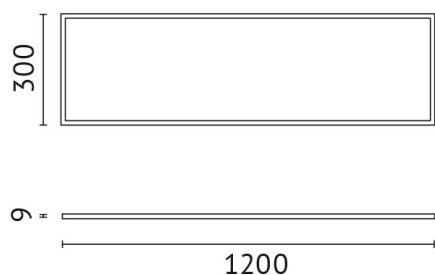

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de