
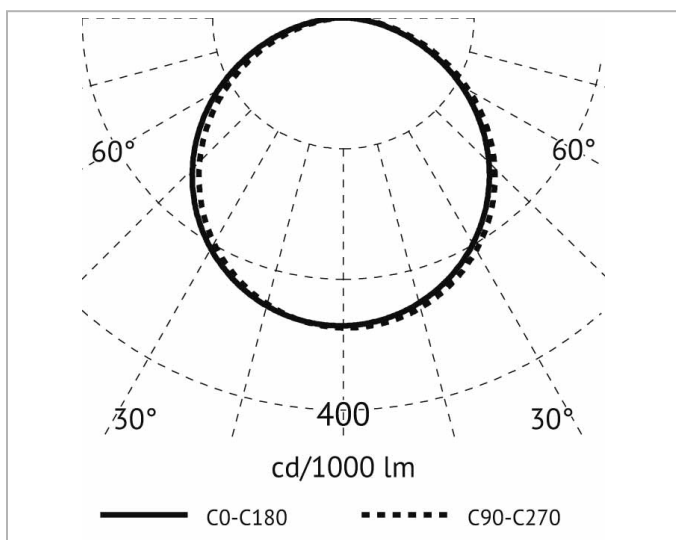


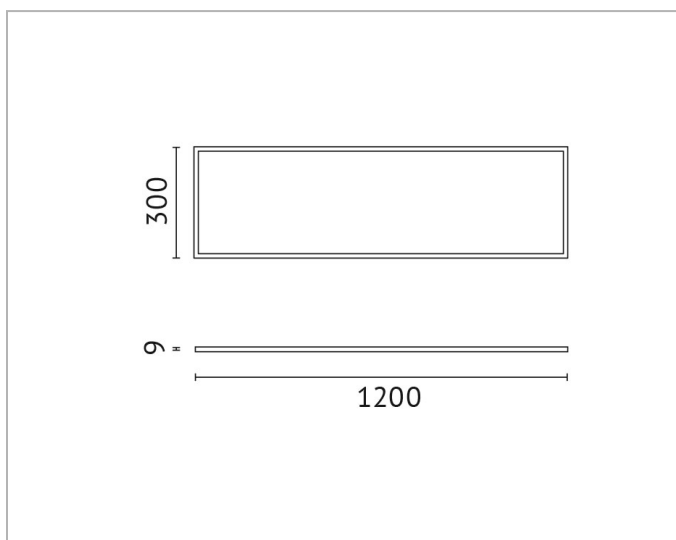

Description

DDH, recessed ceiling light, module 1200x300mm, LED 1x40W, UGR<19, 4000K, CRI>80, 220-240V, prismatic diffuser, incl. external power supply unit, IP20, white frame

General data

Colour housing:	White
Degree of protection (IP):	IP20
Material housing:	Aluminium
Protection class:	II
Suitable for ceiling mounting:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	100lm/W
Max. system power:	40W
Rated luminous flux according to IEC 62722-2-1:	4014lm
Suitable for number of lamps:	2
Suitable for workplace according to EN 12464-1:	Yes
Unified Glare Ratio (UGR):	18.65

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	220V - 240V



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Voltage type:

AC

Product dimensions

Height/depth:



9mm

Length:

1200mm

Width:

300mm

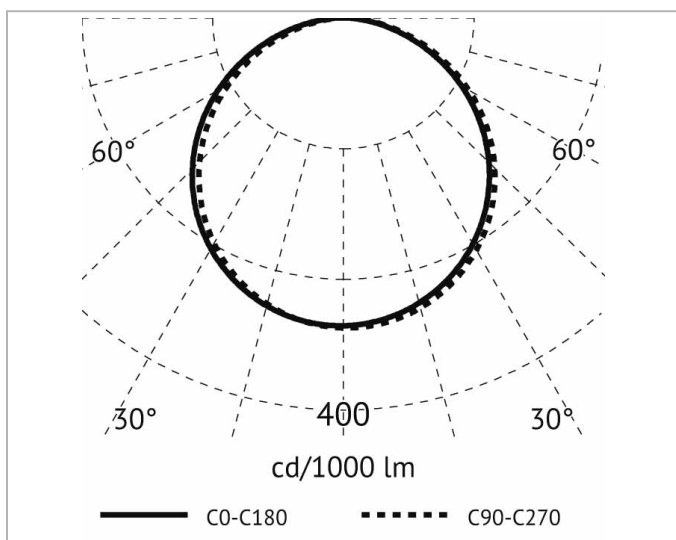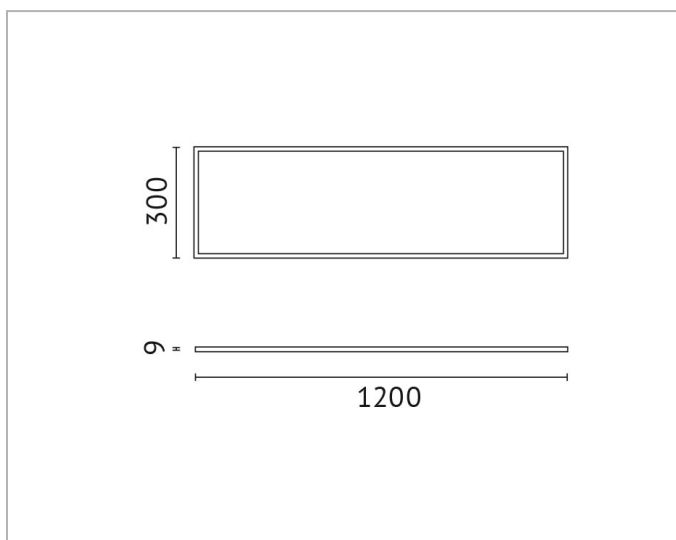

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de