
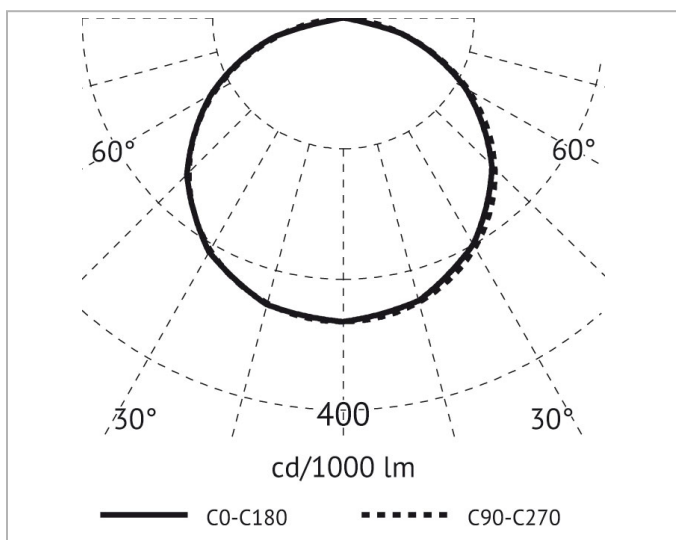


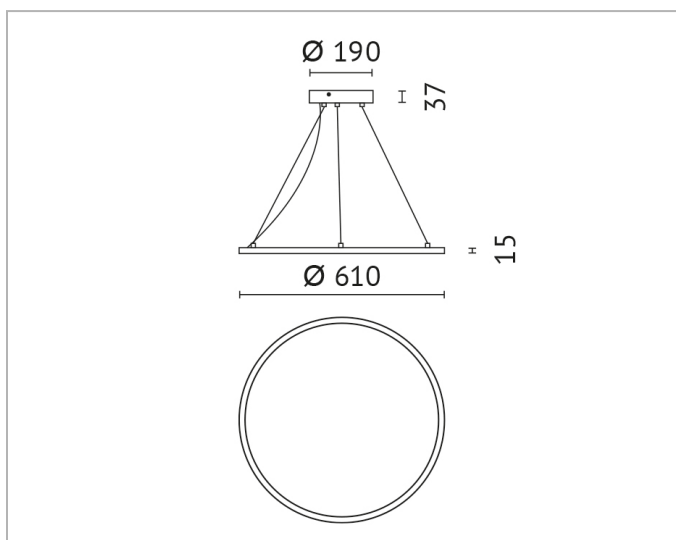

Description

DDHR pendant luminaire, LED 41W, 4000K, CRI>80, UGR<16, 220-240V, 1000mA, Ø600mm, light distribution: direct 65% - indirect 35%, beam angle 120°, PMMA opal diffuser, incl. external Osram power supply DALI, flicker-free, IP20, white frame

General data

Colour housing:	White
Degree of protection (IP):	IP20
Material cover:	Plastic, opal
Material housing:	Aluminium
Protection class:	II
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM6
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	97lm/W
Max. system power:	41W
Rated luminous flux according to IEC 62722-2-1:	3987lm
Suitable for number of lamps:	1
Suitable for workplace according to EN 12464-1:	Yes
Unified Glare Ratio (UGR):	15,05

Electrical data

Exchangeable control gear:	Yes
-----------------------------------	-----



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Pendant luminaire



DDHR-40NW31P-DD



No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Diameter:	600mm
Height/depth:	15mm
Pendant length:	1500mm

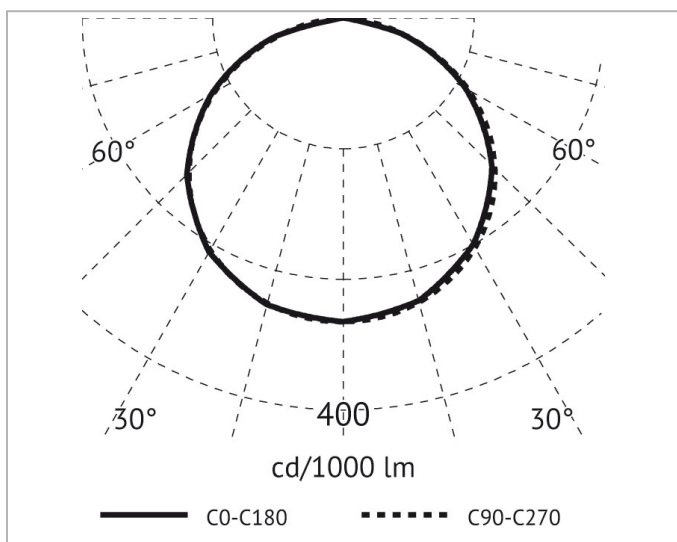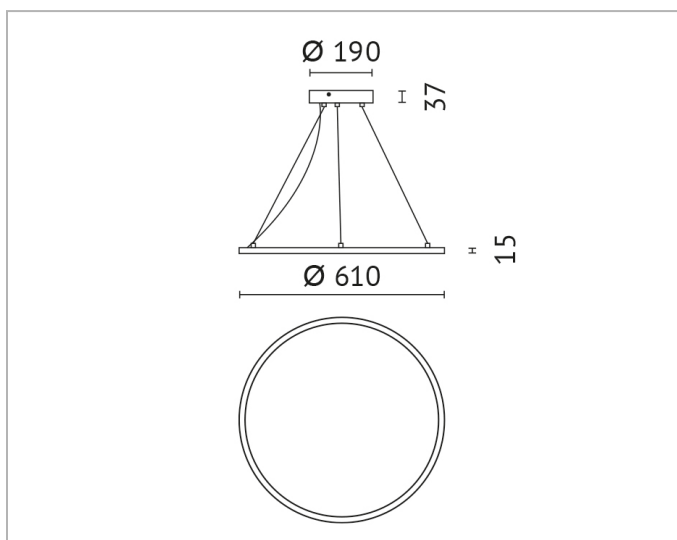

Misprints and errors excepted. Drawings and pictures are sketches. Dimensions and technical data are approximate. Length specifications without unit in millimeters. The Object photos shown are examples of applications independent of the actual effect. We reserve the right to make changes to the range, technology and design (without prior notice). Color deviations are due to printing technology, possible.

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de