
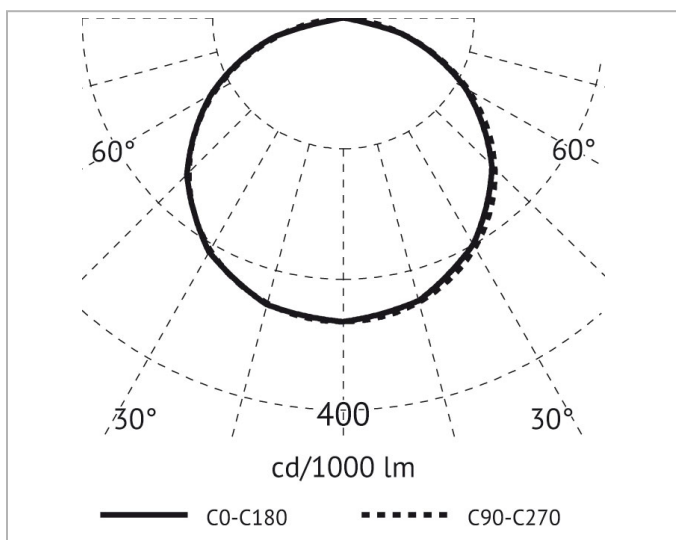


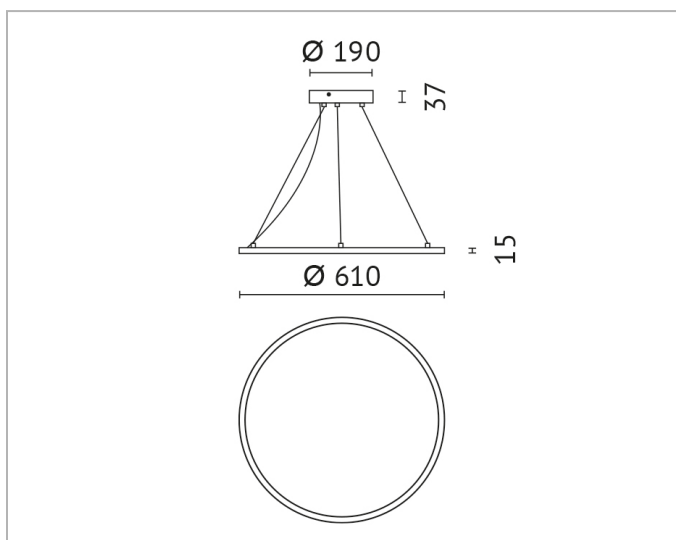

Description

DDHR pendant luminaire, LED 41W, 3000K, CRI>80, UGR<16, 220-240V, 1000mA, Ø600mm, light distribution: direct 65% - indirect 35%, beam angle 120°, PMMA opal diffuser, incl. external Osram power supply DALI, flicker-free, IP20, white frame

General data

Colour housing:	White
Degree of protection (IP):	IP20
Material cover:	Plastic, opal
Material housing:	Aluminium
Protection class:	II
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM6
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	94lm/W
Max. system power:	41W
Rated luminous flux according to IEC 62722-2-1:	3867lm
Suitable for number of lamps:	1
Suitable for workplace according to EN 12464-1:	Yes
Unified Glare Ratio (UGR):	15,00

Electrical data

Exchangeable control gear:	Yes
-----------------------------------	-----



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Pendant luminaire



DDHR-40WW31P-DD



No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Diameter:	600mm
Height/depth:	15mm
Pendant length:	1500mm

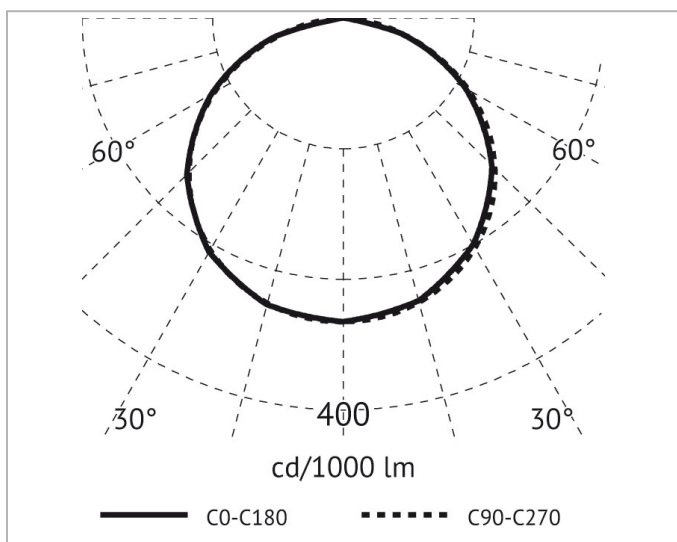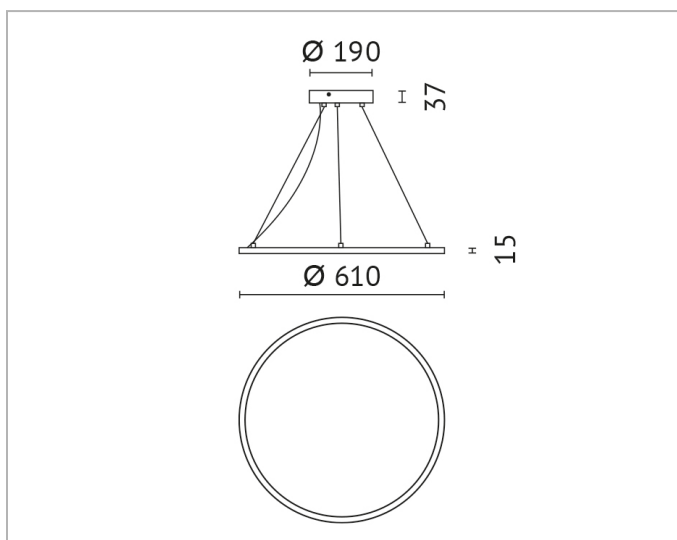

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de