
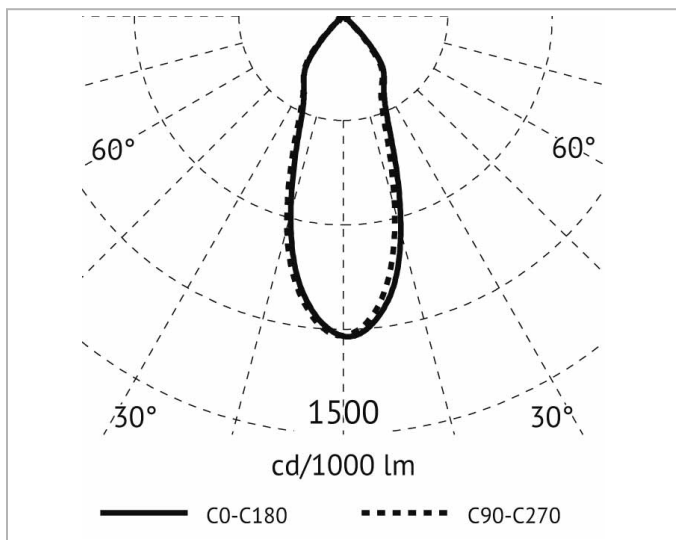


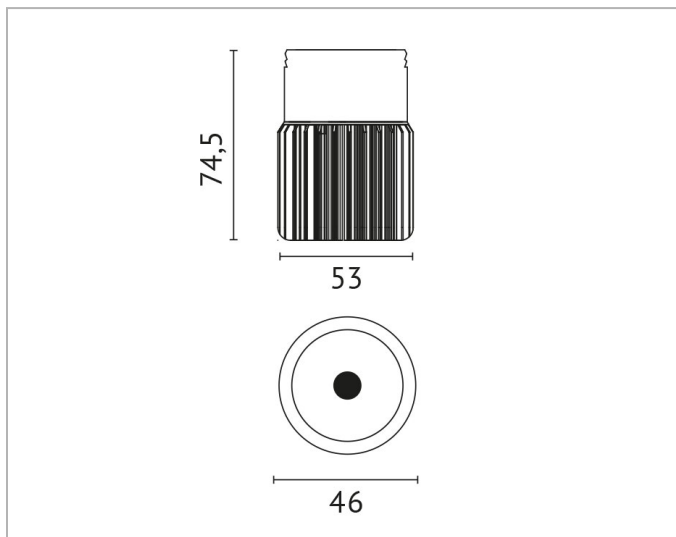

Description

DIL, LED module 15W, warm white 2700k, 700mA, incl. reflector 38° changeable, incl. power supply, connecting cable pluggable, black fins, without accessories, white housing, IP20

General data

Adjustability:	Not adjustable
Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	II
Suitable for built-in mounting:	Yes

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	2700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	69lm/W
Luminous flux:	-lm
Max. system power:	15W
Rated luminous flux according to IEC 62722-2-1:	1040lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	23.15

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Nominal voltage: 220V - 240V
Voltage type: AC
With control gear: Yes

Product dimensions

Built-in diameter: - mm
Built-in height/depth: 74.5mm
Height/depth: 75mm
Outer diameter: 53mm

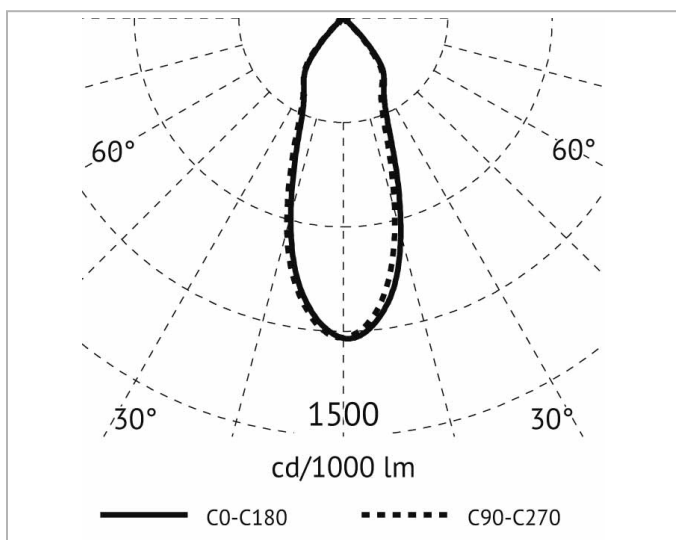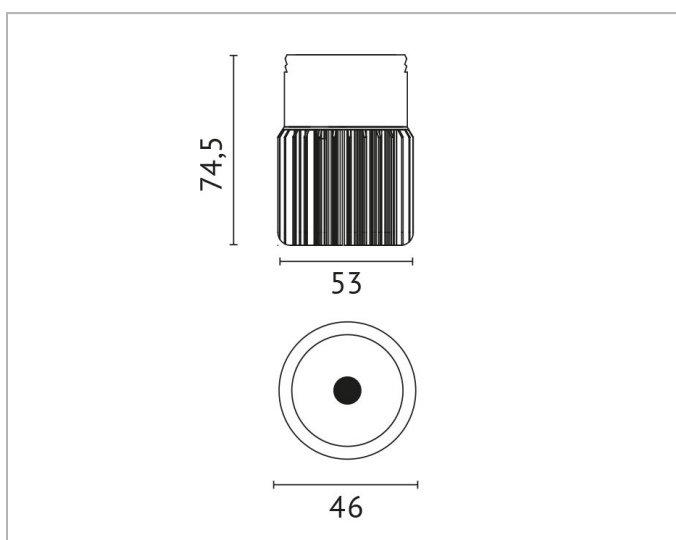

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de