
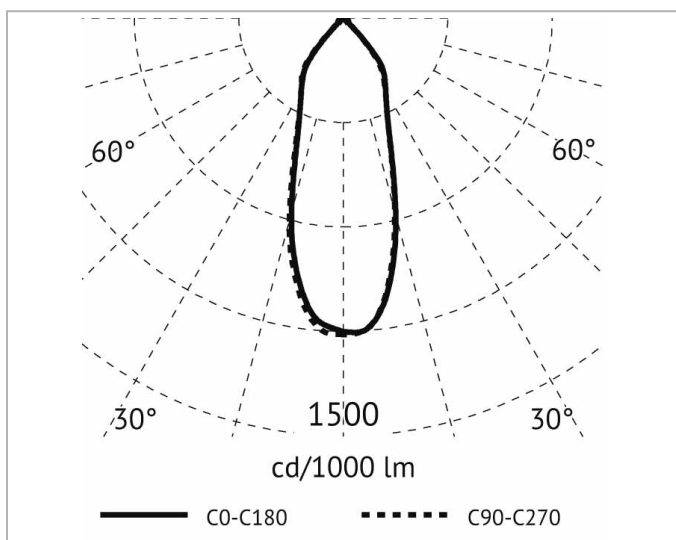


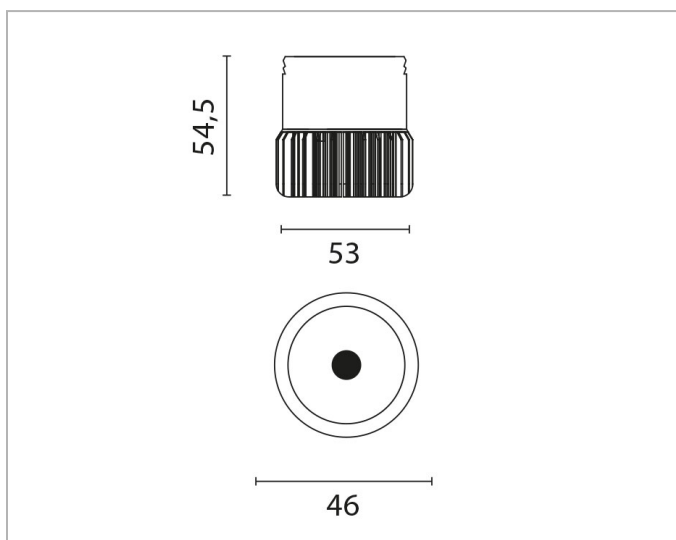

Description

DIL, LED module 7W, warm white 3000K, 700mA, incl. reflector 38° replaceable, incl. external power supply, connecting cable pluggable, black fins, without accessories, white housing, IP20

General data

Adjustability:	Not adjustable
Colour housing:	White
Degree of protection (IP):	IP20
Lamp holder:	None
Material housing:	Aluminium
Protection class:	II
Suitable for built-in mounting:	Yes

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	73lm/W
Max. system power:	7W
Rated luminous flux according to IEC 62722-2-1:	511lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	21.35

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	220V - 240V



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Voltage type: AC
With control gear: Yes

Product dimensions

Built-in height/depth: 54.5mm
Height/depth: 54mm
Outer diameter: 53mm

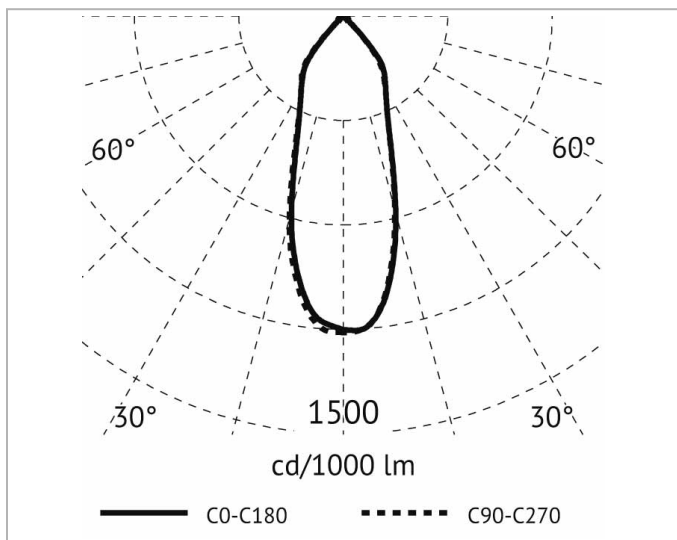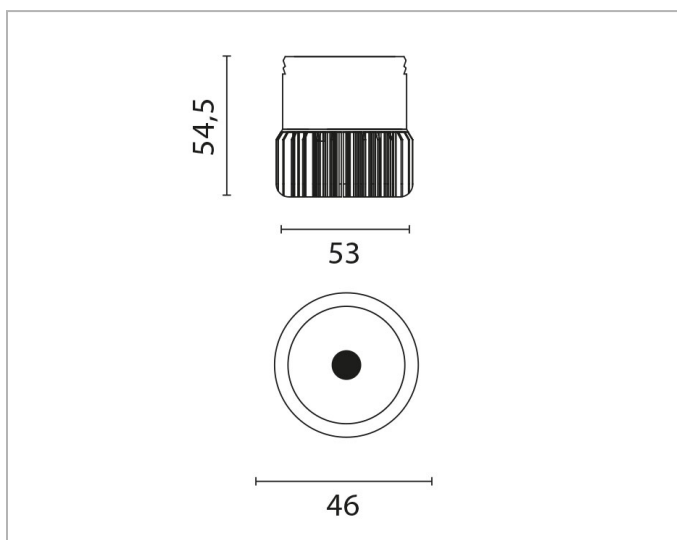

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de