
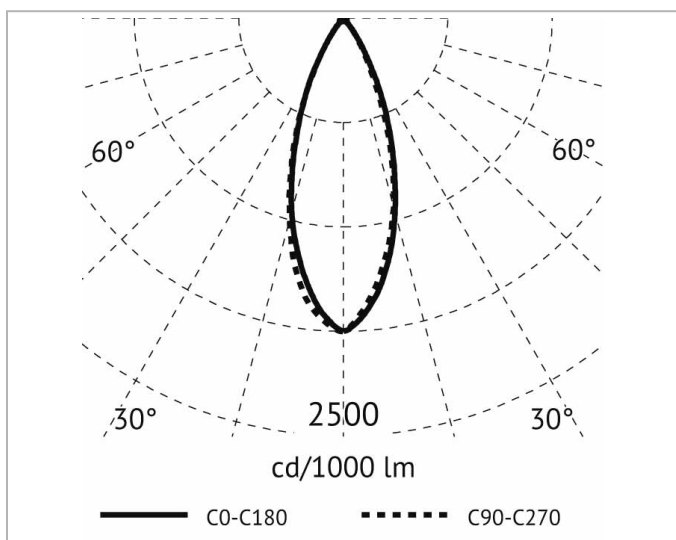


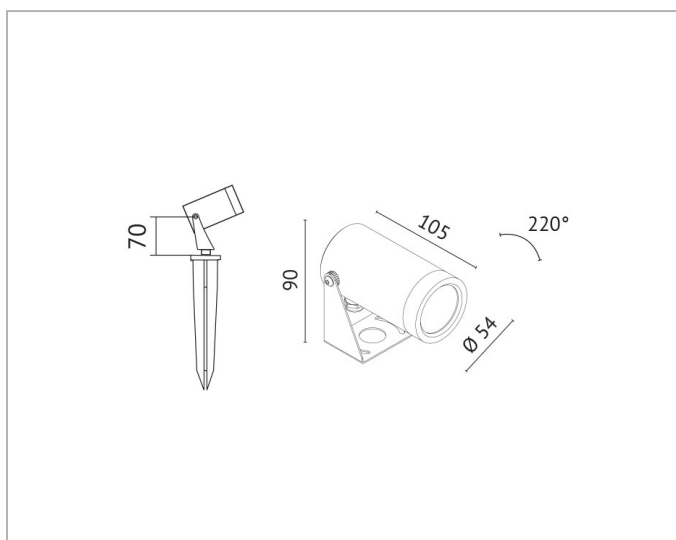

Description

DX STEM54 LED ground surface mounted light fitting, 6W, H=70mm, Dia 54mm, 3000K, CRI>80, IP65, anodized aluminium, 52° beam angle, aluminium housing

General data

Colour housing:	Aluminium
Degree of protection (IP):	IP65
Lamp holder:	None
Material housing:	Aluminium
Protection class:	II
Type of luminaire:	Ground spike
With base plate:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	24lm/W
Max. system power:	6W
Rated luminous flux according to IEC 62722-2-1:	142lm

Electrical data

Impact strength:	IK06
Nominal voltage:	220V - 240V
Voltage type:	AC

Product dimensions

Diameter:	54mm
Height/depth:	70mm

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de