
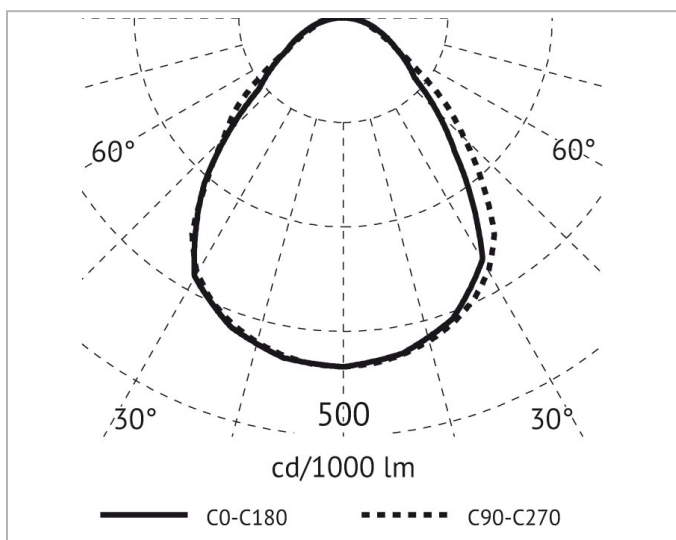
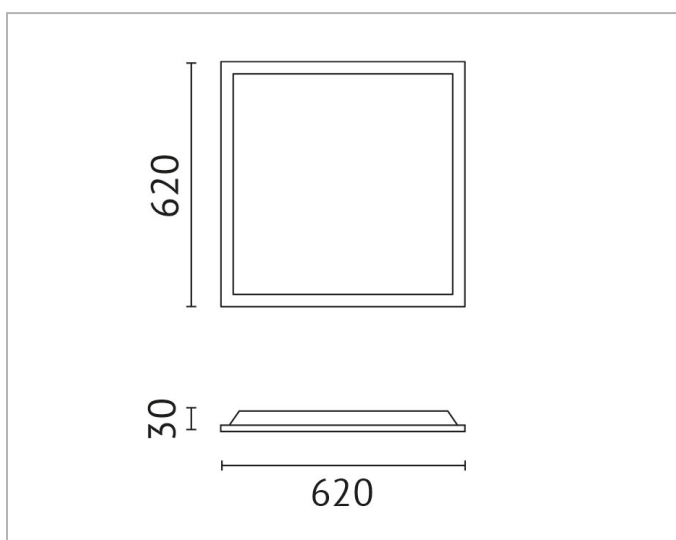


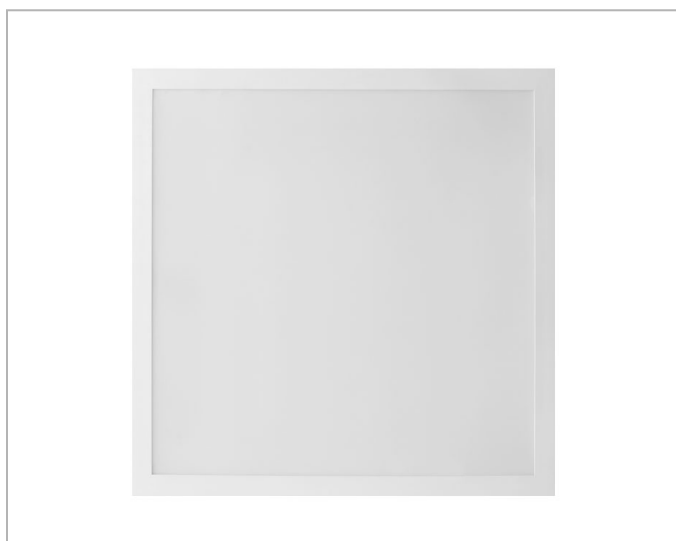

## Description

Backlit panel, 620x620mm, H30mm, 30W, 3mm prismatic PMMA front cover, PMMA diffuser, incl. Philips Xitanium flickerfree driver, 4000K, UGR19

## General data

|                                        |           |
|----------------------------------------|-----------|
| <b>Colour housing:</b>                 | White     |
| <b>Degree of protection (IP):</b>      | IP20      |
| <b>Material housing:</b>               | Aluminium |
| <b>Protection class:</b>               | II        |
| <b>Suitable for built-in mounting:</b> | Yes       |
| <b>Suitable for ceiling mounting:</b>  | Yes       |
| <b>Suitable for surface mounting:</b>  | Yes       |


## Photometric data

|                                                        |                        |
|--------------------------------------------------------|------------------------|
| <b>Beam angle:</b>                                     | Extreme wide beam >80° |
| <b>Colour of light:</b>                                | White                  |
| <b>Colour rendering index CRI:</b>                     | 80-89                  |
| <b>Colour temperature:</b>                             | 4000K                  |
| <b>Light outlet:</b>                                   | Direct                 |
| <b>Light sharing:</b>                                  | Symmetric              |
| <b>Luminaire efficacy:</b>                             | 3736lm/W               |
| <b>Max. system power:</b>                              | 30W                    |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 3736lm                 |
| <b>Suitable for number of lamps:</b>                   | 6                      |
| <b>Suitable for workplace according to EN 12464-1:</b> | Yes                    |
| <b>Unified Glare Ratio (UGR):</b>                      | 19                     |



## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
 Mastorter Str. 31 | 88069 Tettnang (Germany)  
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
 E-Mail: info@als.de | Web: www.als.de


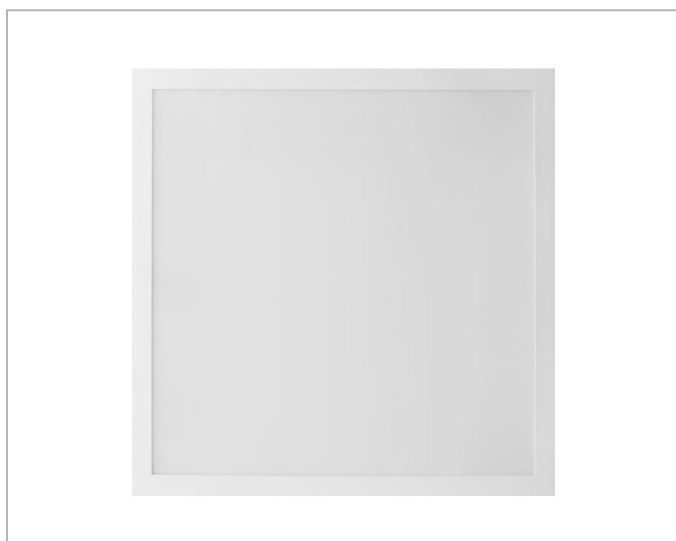


#### Electrical data

|                                   |             |
|-----------------------------------|-------------|
| <b>Exchangeable control gear:</b> | Yes         |
| <b>No dim function:</b>           | Yes         |
| <b>Nominal voltage:</b>           | 220V - 240V |
| <b>Voltage type:</b>              | AC          |
| <b>With control gear:</b>         | Yes         |

#### Product dimensions

|                      |       |
|----------------------|-------|
| <b>Height/depth:</b> | 33mm  |
| <b>Length:</b>       | 620mm |
| <b>Width:</b>        | 620mm |

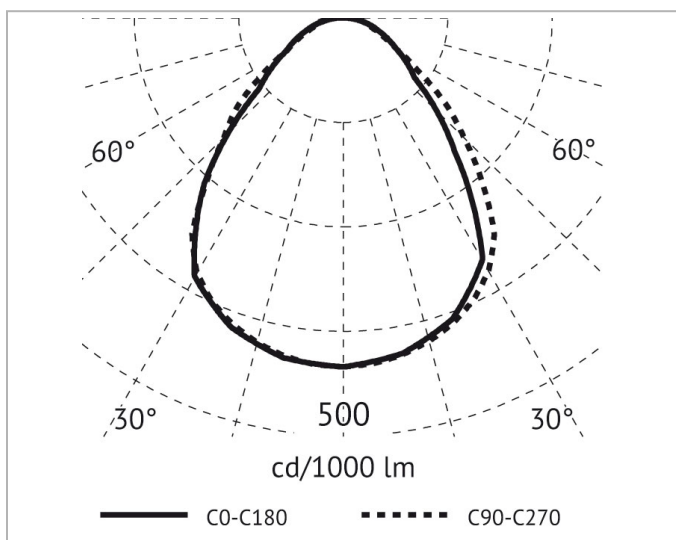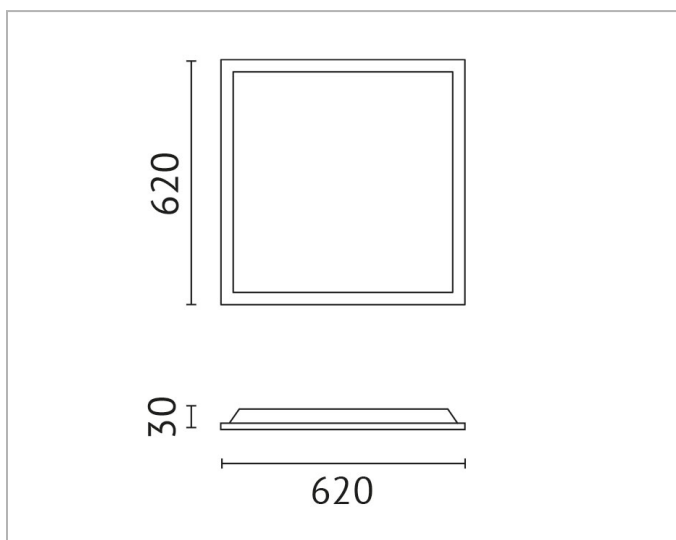

#### Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)