
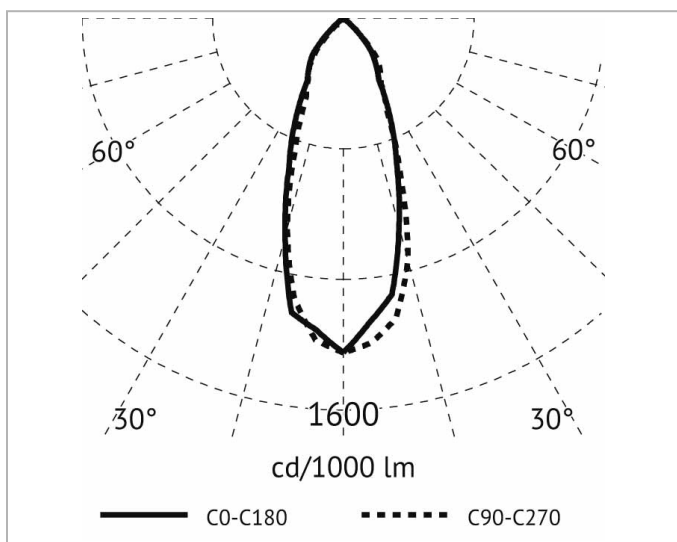


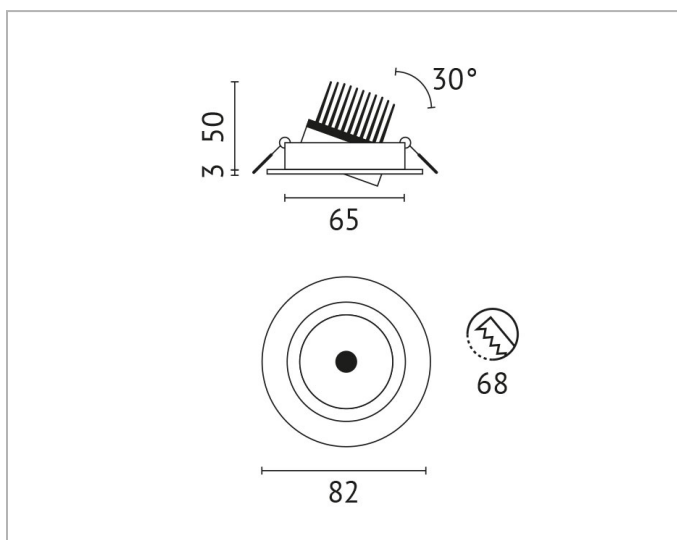

Description

ELRS, Round recessed downlight, COB LED 7W, 1800-3000K warm white led's, CRI>96, 350mA, beam angle 38°, 30° rotatable, incl. power supply, IP44 (in closed ceiling), white

General data

Adjustability:	Swivelling
Colour housing:	White
Degree of protection (IP):	IP44
Lamp holder:	None
Material housing:	Aluminium
Protection class:	II
Suitable for built-in mounting:	Yes

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	1800K - 3000K
Colour temperature adjustable:	Continuously variable
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	69lm/W
Luminous flux:	480lm
Max. system power:	7W
Rated luminous flux according to IEC 62722-2-1:	480lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	20.5

Electrical data

Exchangeable control gear:	Yes
-----------------------------------	-----



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Built-in diameter:	68mm
Built-in height/depth:	50mm
Height/depth:	53mm
Outer diameter:	82mm

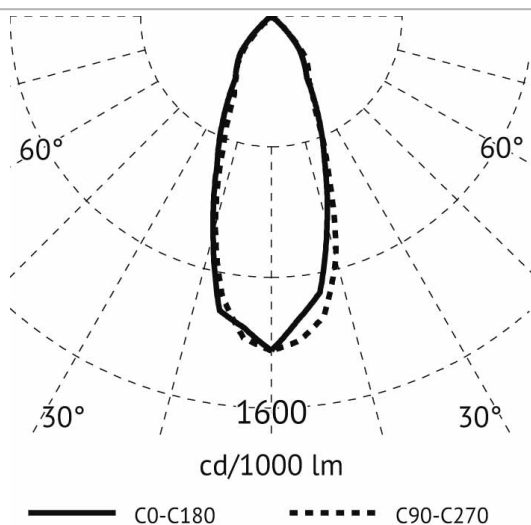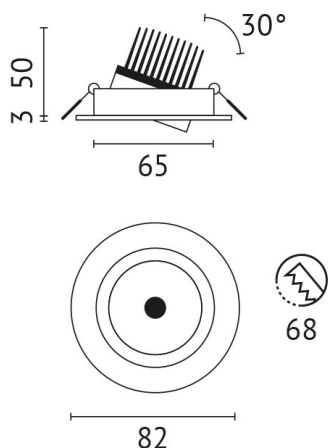

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de