



Description

ELRS, Round recessed downlight, COB LED 6W, 2700K warm white led's, 350mA, CRI>90, beam angle 38°, 20° rotatable, incl. power supply and connecting cable female, IP44 (in closed ceiling), matt aluminium system 7,5W

General data



Adjustability:	Swivelling
Colour housing:	Aluminium
Degree of protection (IP):	IP44
Lamp holder:	None
Material housing:	Aluminium
Protection class:	II
Suitable for built-in mounting:	Yes

Photometric data

Beam angle:	Medium beam 21-40°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	2700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	85lm/W
Luminous flux:	508lm
Max. system power:	6W
Rated luminous flux according to IEC 62722-2-1:	508lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	19.7

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes

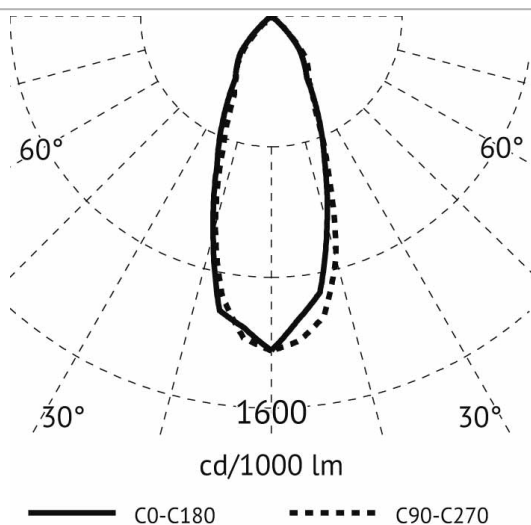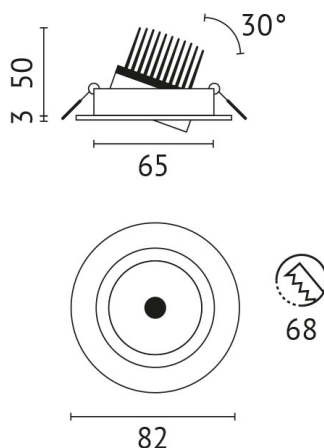

Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Nominal voltage: 220V - 240V
Voltage type: AC
With control gear: Yes

Product dimensions

Built-in diameter: 68mm
Built-in height/depth: 50mm
Height/depth: 53mm
Outer diameter: 82mm

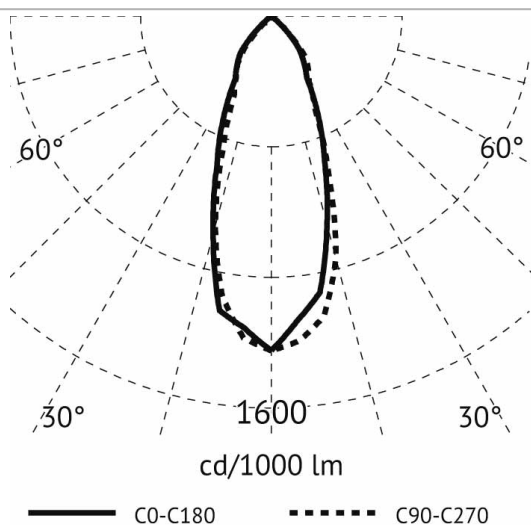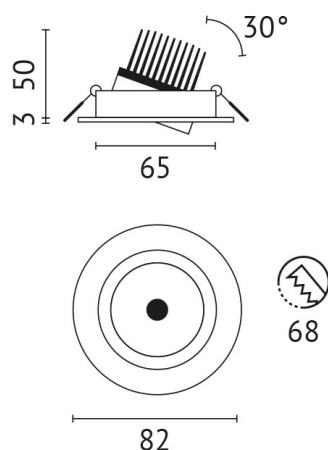

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de