



Description

ENR, cardanic-recessed-set, round, 30°pivoted, protection class II, consisting: aluminium-downlight, LED 1x6W, GU10, with 36° FLOOD beamangle, warm white led's, dimable, incl. cable clamp, frame alu-natural

General data

Adjustability:	Swivelling
Colour housing:	Aluminium
Degree of protection (IP):	IP20
Lamp holder:	GU5.3
Material housing:	Aluminium
Protection class:	I
Suitable for built-in mounting:	Yes

Photometric data


Beam angle:	Medium beam 21-40°
Colour temperature:	2700K
Light outlet:	Direct
Luminous flux:	350lm
Max. system power:	6W

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC

Product dimensions

Built-in diameter:	80mm
Outer diameter:	90mm

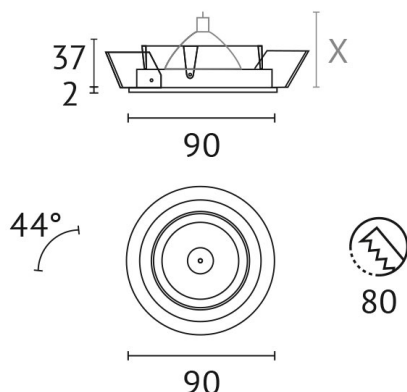

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de