


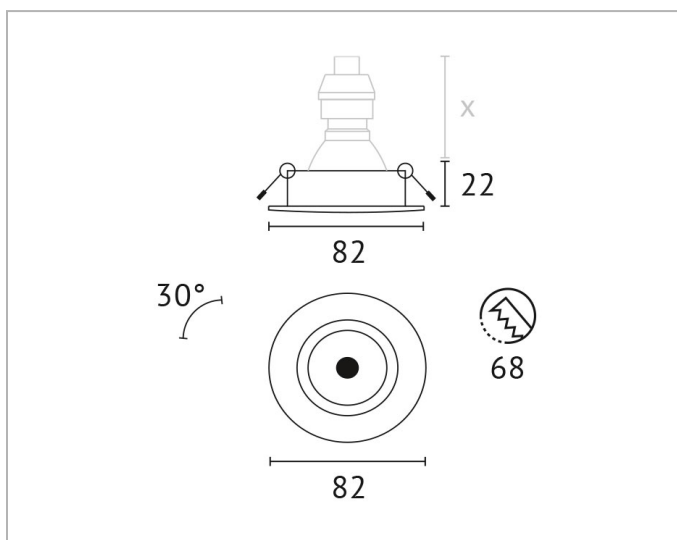

Description

ENY-SET consists: recessed downlight, aluminium die-cast housing, LED 1x6W GU10, 36° FLOOD beam angle, 827 warm white, 30° pivoted, incl. cable clame, frame chrom brushed

General data

Adjustability:	Swivelling
Colour housing:	Chrome
Degree of protection (IP):	IP20
Lamp holder:	GU10
Material housing:	Aluminium
Protection class:	I
Suitable for built-in mounting:	Yes

Photometric data

Beam angle:	Medium beam 21-40°
Colour temperature:	2700K
Light outlet:	Direct
Luminous flux:	350lm
Max. system power:	5.5W

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC

Product dimensions

Built-in diameter:	68mm
Outer diameter:	82mm



Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de