


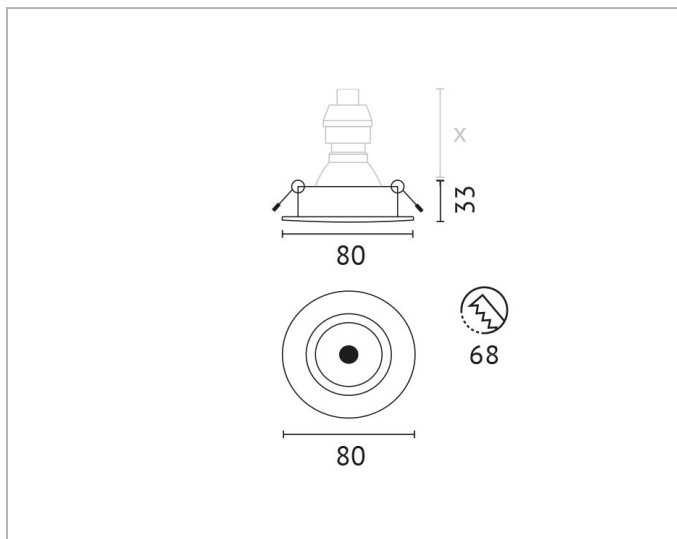

Description

ENY, low voltage downlight, die-cast aluminium, for QR-CBC-51, max. 50W, GX5,3, 12V, 30° pivotable, without ballast, chrome brushed

General data

Adjustability:	Not adjustable
Colour housing:	Chrome
Degree of protection (IP):	IP20
Lamp holder:	GX5.3
Material housing:	Aluminium
Protection class:	III
Suitable for built-in mounting:	Yes

Photometric data

Light outlet:	Direct
Max. system power:	50W

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	12V
Voltage type:	AC

Product dimensions

Built-in diameter:	68mm
Outer diameter:	80mm



Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de