



Description

FLEXY LED-FLEX-MODUL, 5m, 300 LED's, 5050 SMD LED, 96W per reel, 19,2W/M, 60LED's/M, RGB+W 3000K, IP20

General data

Degree of protection (IP):	IP20
Model:	Strip
Mounting method:	Surface mounting
Protection class:	III
Self-adhesive:	Yes

Photometric data


Beam angle:	120°
Colour of light:	RGBW
Colour rendering index CRI:	80-89
Lamp power per meter:	19.2W
Number of nodes per meter:	60

Electrical data

Exchangeable control gear:	Yes
Length of particular segments:	100mm
Lowest bending radius:	30mm
Suitable for dimmer:	Yes
Voltage type:	DC

Product dimensions

Length:	5000mm
Width:	12mm

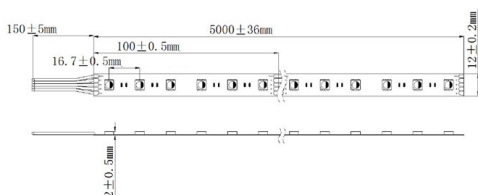

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de