

## Description

FLEXY, LED-FLEX-MODUL, 5m, 1200 LED's, 14,4 W/m, 240 LED's/M, 2500-6000K, 24V, Ra 90, IP20, useful luminous flux: 289-342 lm/0,5m (360°), energy consumption in on-mode: 4 kWh/1000h (3,6 W)/0,5 m, dimmable with specific drivers, L70B50: 36.000 h

## General data

|                                   |                  |
|-----------------------------------|------------------|
| <b>Degree of protection (IP):</b> | IP20             |
| <b>Model:</b>                     | Strip            |
| <b>Mounting method:</b>           | Surface mounting |
| <b>Protection class:</b>          | III              |
| <b>Self-adhesive:</b>             | Yes              |

## Photometric data


|                                       |                       |
|---------------------------------------|-----------------------|
| <b>Beam angle:</b>                    | 120°                  |
| <b>Colour of light:</b>               | White                 |
| <b>Colour rendering index CRI:</b>    | 90-100                |
| <b>Colour temperature:</b>            | 2500K - 6000K         |
| <b>Colour temperature adjustable:</b> | Continuously variable |
| <b>Lamp power per meter:</b>          | 14.4W                 |
| <b>Number of nodes per meter:</b>     | 240                   |

## Electrical data

|                                       |       |
|---------------------------------------|-------|
| <b>Exchangeable control gear:</b>     | Yes   |
| <b>Length of particular segments:</b> | 100mm |
| <b>Lowest bending radius:</b>         | 30mm  |
| <b>Suitable for dimmer:</b>           | Yes   |
| <b>Voltage type:</b>                  | DC    |

## Product dimensions

|                |        |
|----------------|--------|
| <b>Length:</b> | 5000mm |
| <b>Width:</b>  | 10mm   |

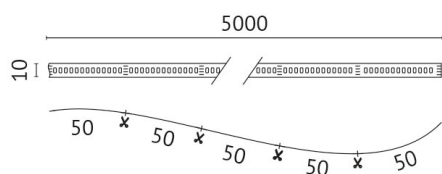

## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de