



Description

FLEXY, LED-FLEX-MODUL, 5m, 2000 LED, 14,4W/M, 400LED/M, 4000K, 24V DC, Ra 90, 1296lm/M (120°), IP20, 3M selv-adhesive tape on back

General data

Degree of protection (IP):	IP20
Model:	Strip
Mounting method:	Surface mounting
Protection class:	III
Self-adhesive:	Yes

Photometric data



Beam angle:	120°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	4000K
Lamp power per meter:	14.4W
Luminaire efficacy:	90lm/W
Luminous flux per meter:	1296lm
Number of nodes per meter:	400

Electrical data

Exchangeable control gear:	Yes
Length of particular segments:	20mm
Lowest bending radius:	30mm
Voltage type:	DC

Product dimensions

Length:	5000mm
Width:	8mm

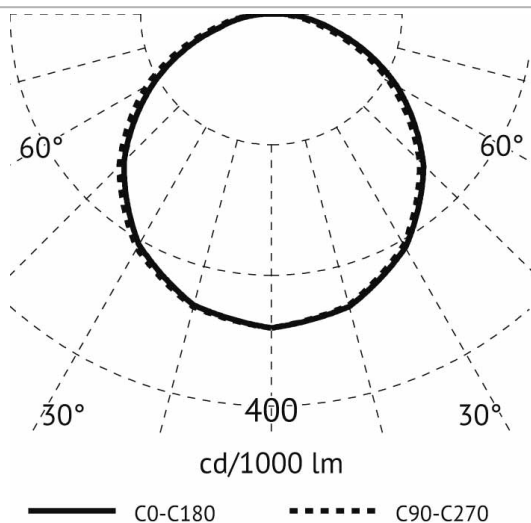

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de