

Description

FLEXY IP67, LED-FLEX-MODUL, 5m, 1400 LED,
7,2W/M, 3000K, 24V, Ra 90, 792lm/M, 3M
selv-adhesive tape on back, 2220 SMD LED, incl.
accessory kit

General data

Degree of protection (IP):	IP67
Model:	Strip
Mounting method:	Surface mounting
Protection class:	III
Self-adhesive:	Yes

Photometric data



Beam angle:	120°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	2700K
Lamp power per meter:	7.2W
Luminaire efficacy:	70lm/W
Luminous flux per meter:	504lm
Number of nodes per meter:	280

Electrical data

Exchangeable control gear:	Yes
Length of particular segments:	25mm
Lowest bending radius:	30mm
Voltage type:	DC

Product dimensions

Height/depth:	3.5mm
Length:	5000mm
Width:	12mm

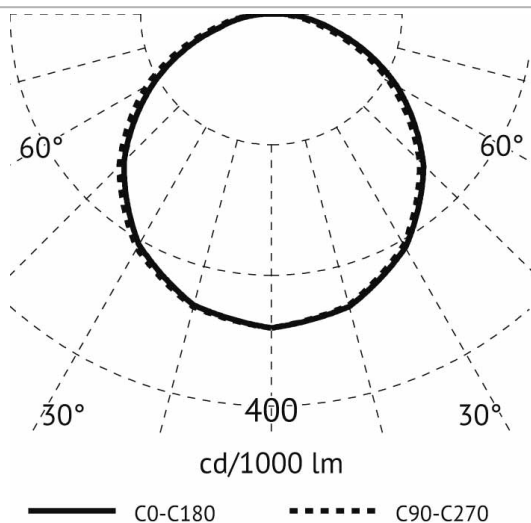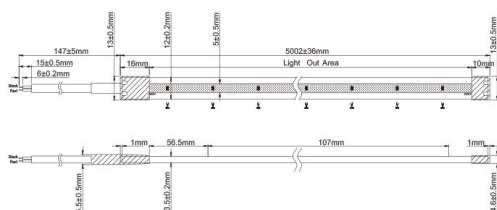

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de