
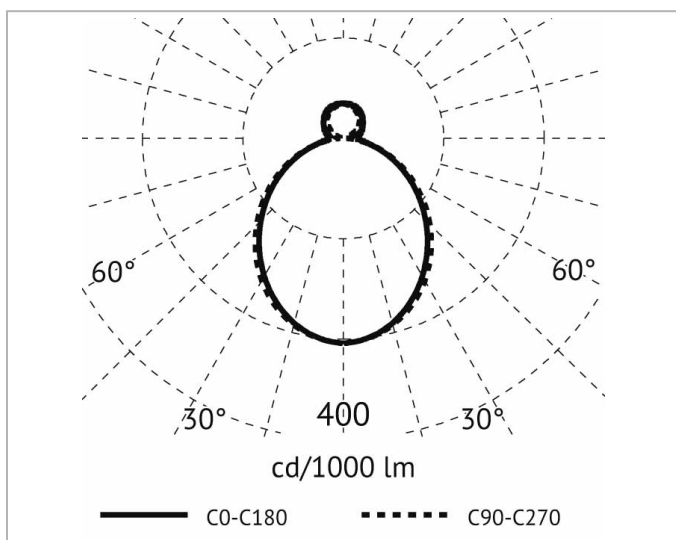


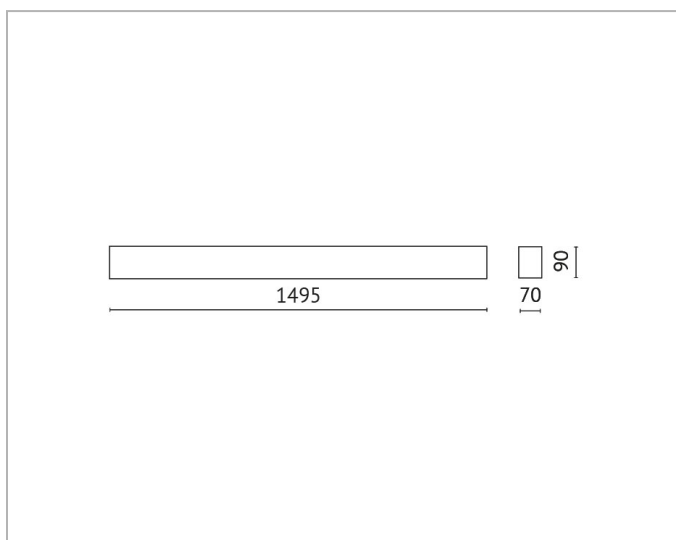

Description

HIGHWAY, pendant luminaire, LED, 55W, direct/indirect light emission, 4000K, incl. EVG + pendant set, opal cover made of PMMA, housing aluminium andozied

General data

Colour housing:	Aluminium
Degree of protection (IP):	IP20
Lamp holder:	None
Material cover:	Plastic, opal
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

Photometric data

Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct/indirect
Light sharing:	Symmetric
Luminaire efficacy:	80lm/W
Max. system power:	53W
Rated luminous flux according to IEC 62722-2-1:	4240lm
Suitable for number of lamps:	5
Type of grid:	None
Unified Glare Ratio (UGR):	24.10

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Nominal voltage: 220V - 240V
Voltage type: AC
With control gear: Yes

Product dimensions

Height/depth: 90mm
Length: 1495mm
Pendant length: 1500mm
Width: 70mm

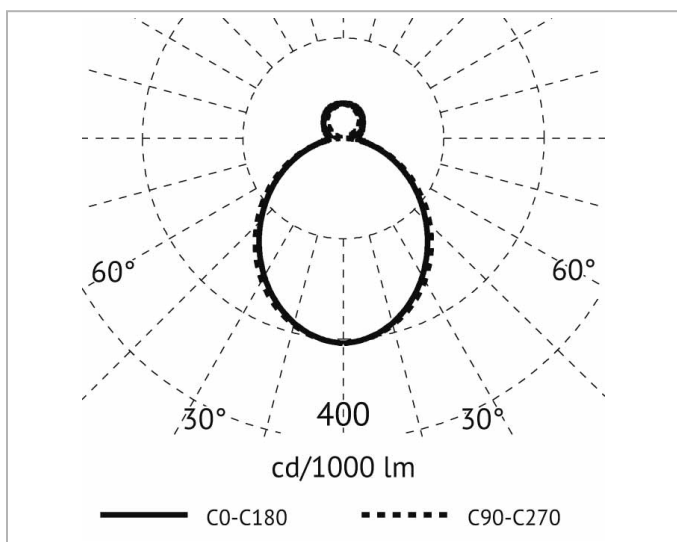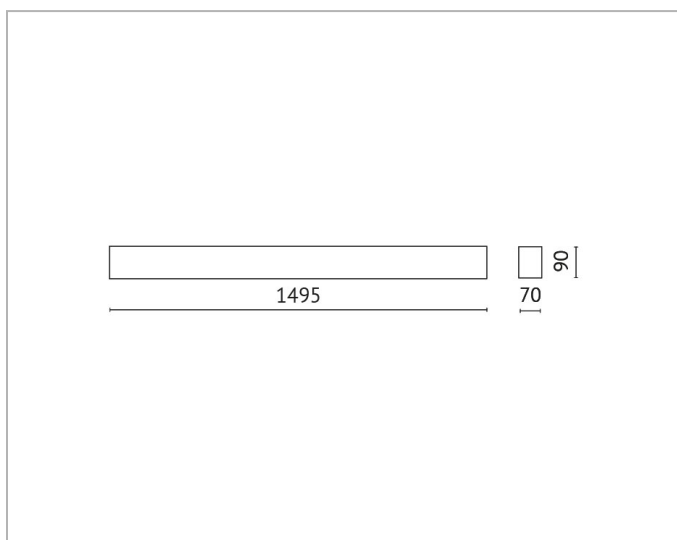

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de