

Description

HBN high-bay luminaire, LED 198/162/122W switchable, 4000K, CRI80, 220-240VAC, 50/60Hz, beam angle 90°, with 1-10V power supply unit, with suspension eye, incl. 1.5m supply cable, Ø301x172mm, IK08, IP65, black

General data

Colour housing:	Black
Degree of protection (IP):	IP65
Protection class:	I

Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	187lm/W
Max. system power:	198W
Rated luminous flux according to IEC 62722-2-1:	38116lm
Suitable for lamp power:	122W - 198W
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	32.85

Electrical data

Dimming 1-10 V:	Yes
Exchangeable control gear:	Yes
Impact strength:	IK08
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes





Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Product dimensions

Diameter:	301mm
Height/depth:	172mm
Pendant length:	-mm

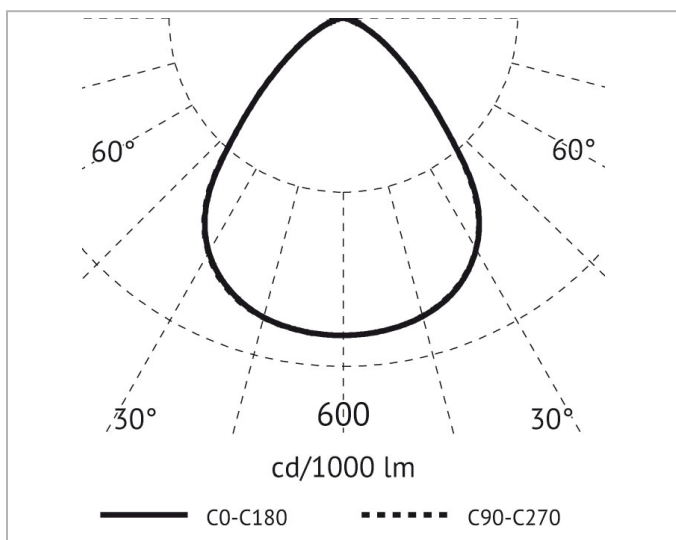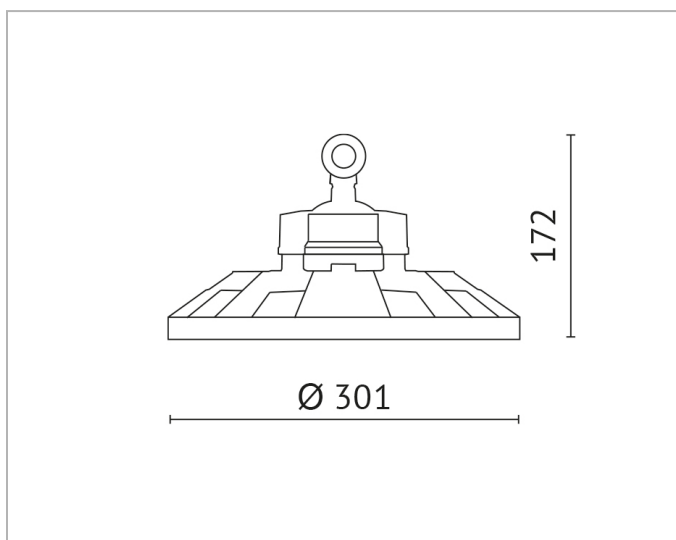

Adress/Contact