
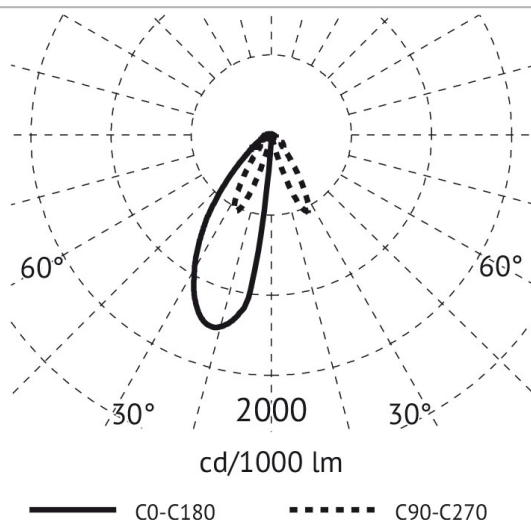


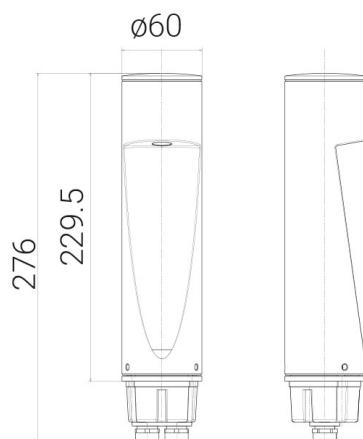

Description

7071AN3K IANUS 60 Light body, LED 1x4,6W, 3000K, CRI80, 240V 50/60Hz, Ø60mm, incl. LED driver, single emission, without pole, IK10, IP66, body made of aluminium, color anthrazit

General data

Colour housing:	Anthracite
Degree of protection (IP):	IP66
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Type of luminaire:	Bollard luminaire
With base plate:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric/asymmetric
Luminaire efficacy:	23lm/W
Max. system power:	5W
Rated luminous flux according to IEC 62722-2-1:	116lm
Suitable for number of lamps:	1

Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK10
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes





Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Product dimensions

Diameter: 60mm
Height/depth: 229.5mm

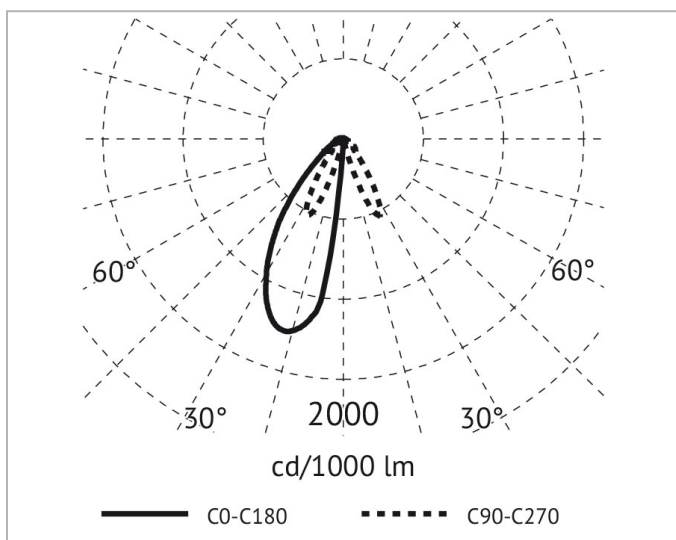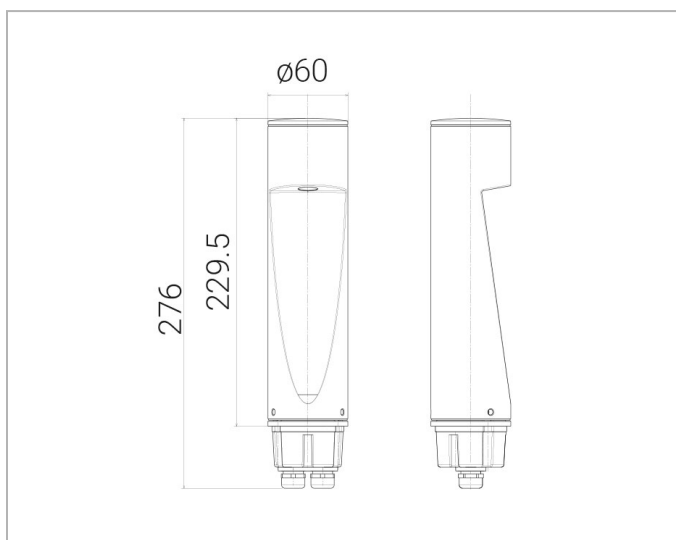

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de