
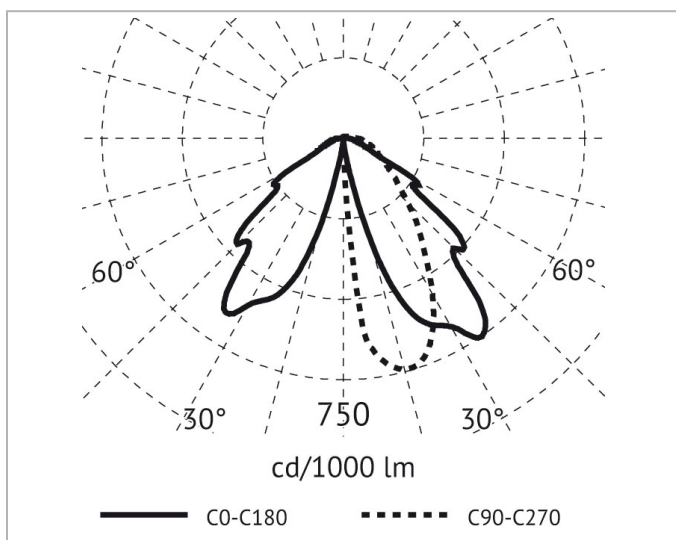


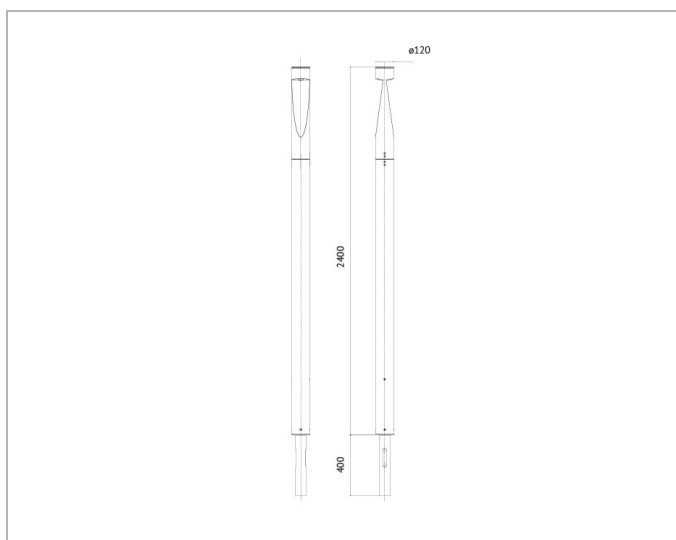

Description

7082AG4KW IANUS Urban mast pole , LED 32W, 4000K, CRI80, 230V, 50Hz, Ø120mm, H=2413mm + 400mm=2813mm total lenght, incl. LED driver, asym. wide, IK10, IP66, body made of aluminium, color alugrey

General data

Colour housing:	Grey
Degree of protection (IP):	IP66
Material housing:	Aluminium
Mounting method:	Other
Protection class:	I

Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Luminaire efficacy:	38lm/W
Max. system power:	32W
Rated luminous flux according to IEC 62722-2-1:	1222lm
Suitable for number of lamps:	2

Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK10
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Diameter:	120mm
Height/depth:	2400mm



Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de