
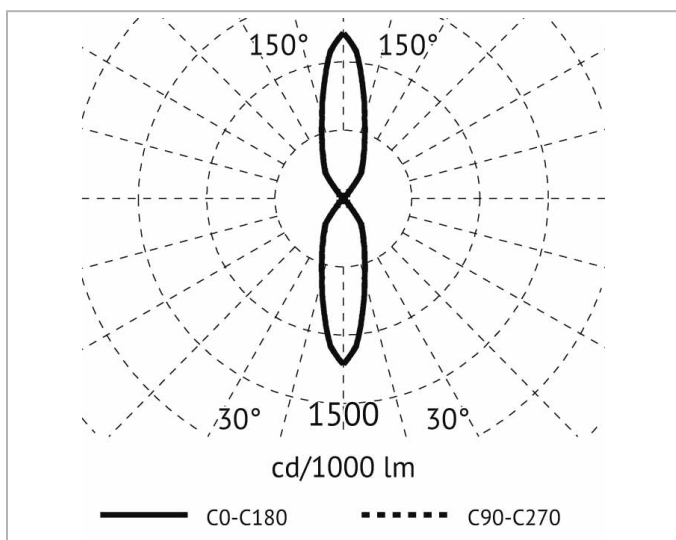


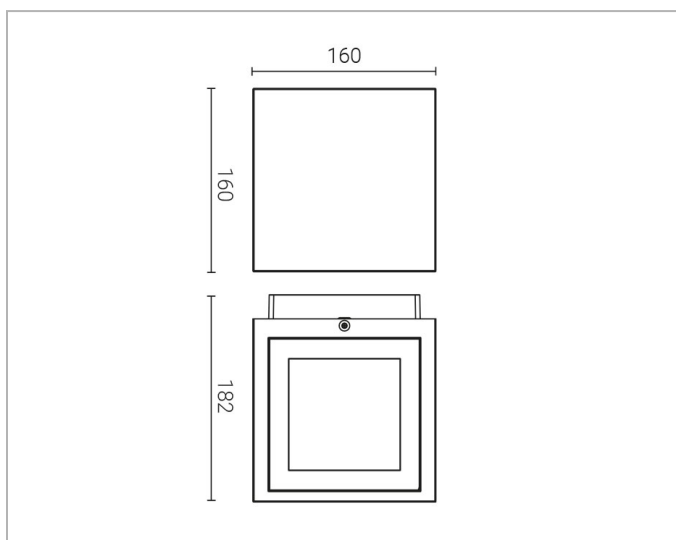

Description

1122AG3K K3 Power LED 2x11W, aluminium die cast housing, two emissions, beam angle 50°/50°, 3000K, IK08, IP65, CRI 80, Life: 60.000 h, milled and tempered glass - frame level, Driver inside, aluminiumgrey

General data

Colour housing:	Grey
Degree of protection (IP):	IP65
Material housing:	Aluminium
Protection class:	II
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	84lm/W
Max. system power:	22W
Rated luminous flux according to IEC 62722-2-1:	1854lm
Suitable for number of lamps:	2

Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK08
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC





Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Product dimensions

Height/depth:	182mm
Length:	160mm
Width:	160mm

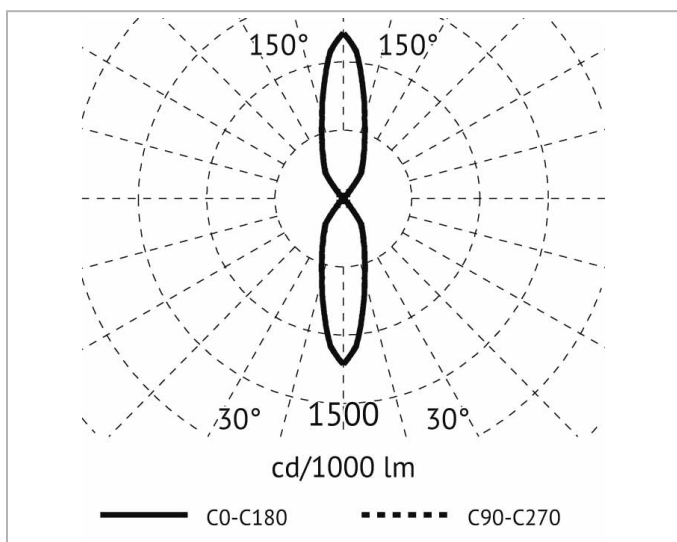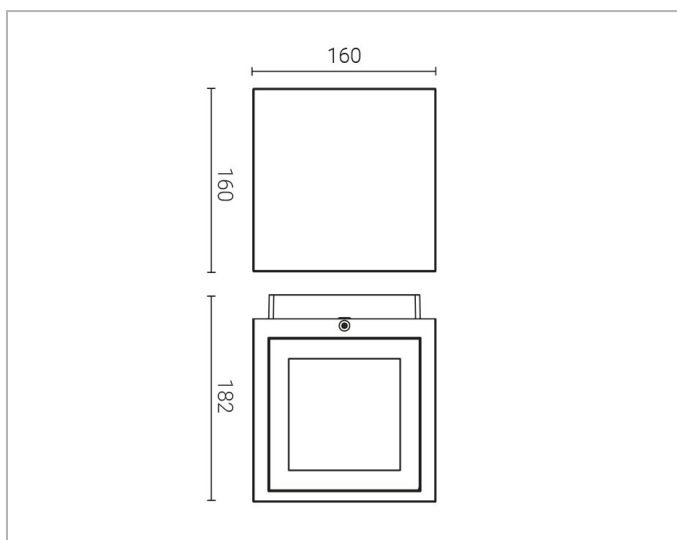

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de