
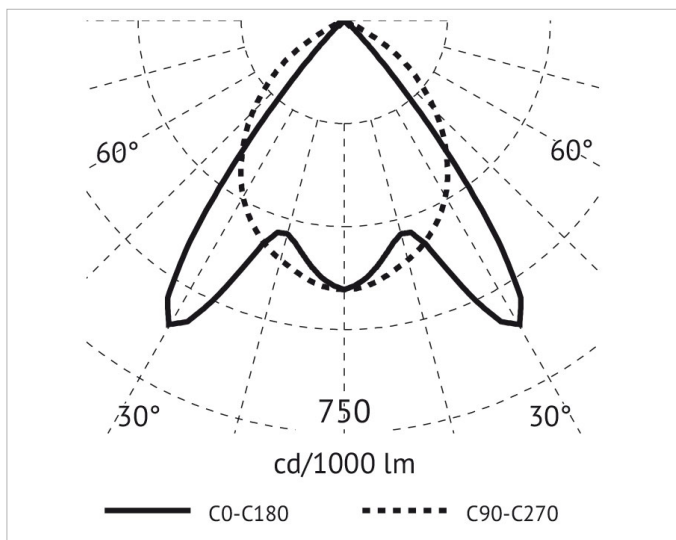


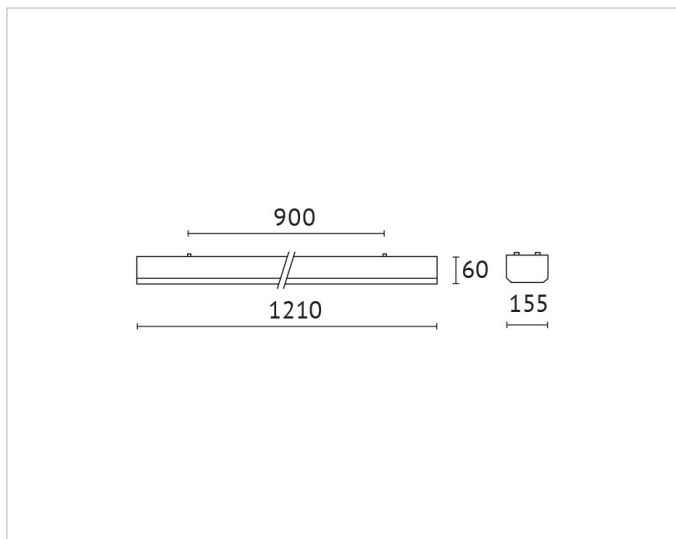

Description

LED ceiling mounted light fitting, DPB, IP20, 3000K, 39/18W, 1210*155*60mm, IP20

General data

Colour housing:	White
Degree of protection (IP):	IP20
Material housing:	Steel
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for suspended mounting:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light distributor:	Reflector
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	110lm/W
Max. system power:	39W
Rated luminous flux according to IEC 62722-2-1:	4300lm
Suitable for number of lamps:	1
Suitable for workplace according to EN 12464-1:	Yes
Type of grid:	High-gloss
Unified Glare Ratio (UGR):	18.00

Adress/Contact



Electrical data

Exchangeable control gear:

Yes

No dim function:

Yes

Nominal voltage:

220V - 240V

Voltage type:

AC

With control gear:

Yes

Product dimensions

Height/depth:



60mm

Length:

1210mm

Width:

155mm

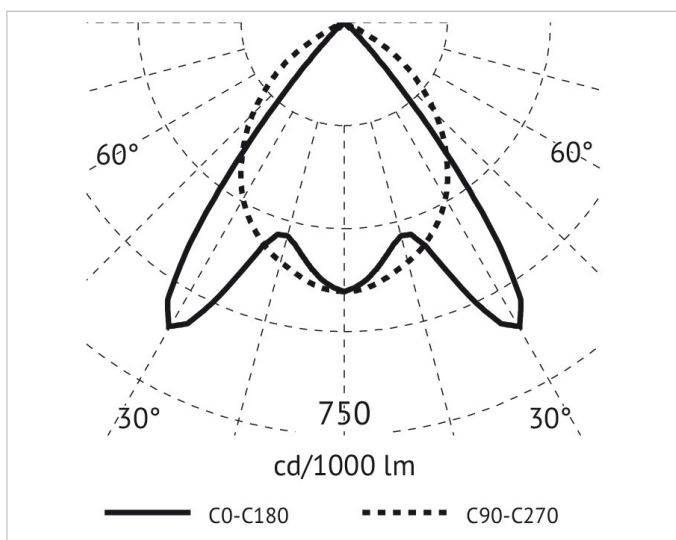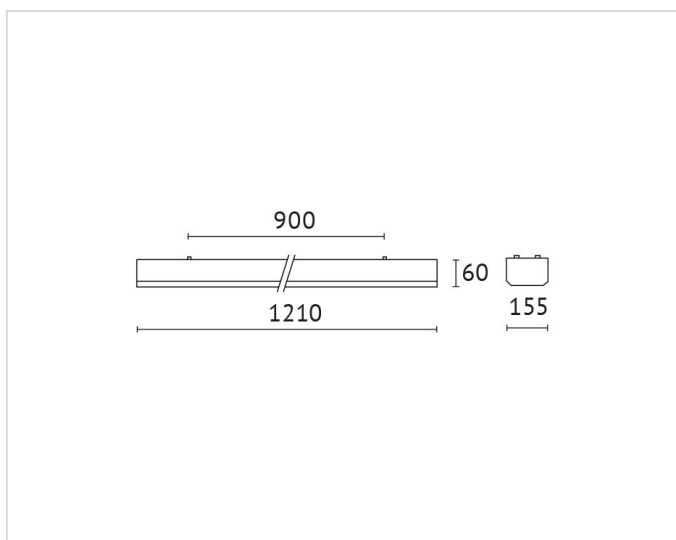

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de