
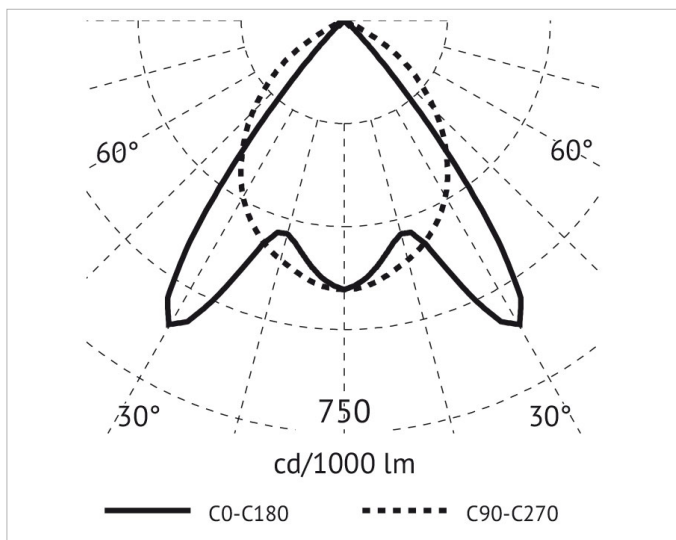


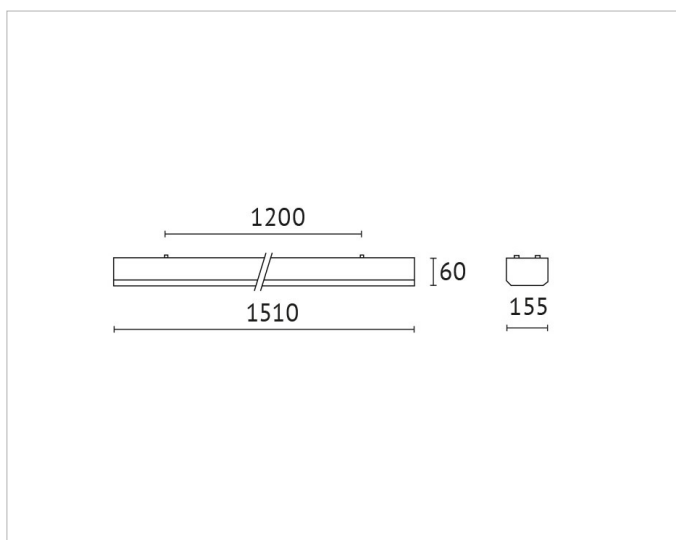

Description

LED ceiling mounted light fitting, DPB, IP20, 4000K, 50/24W

General data

Colour housing:	White
Degree of protection (IP):	IP20
Material housing:	Steel
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for suspended mounting:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light distributor:	Reflector
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	120lm/W
Max. system power:	50W
Rated luminous flux according to IEC 62722-2-1:	6000lm
Suitable for number of lamps:	1
Suitable for workplace according to EN 12464-1:	Yes
Type of grid:	High-gloss
Unified Glare Ratio (UGR):	18.40



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de





Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Height/depth:	60mm
Length:	1510mm
Width:	155mm

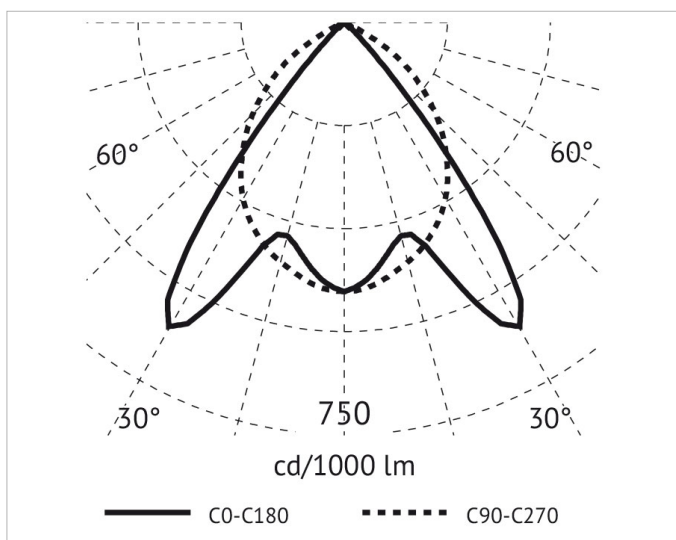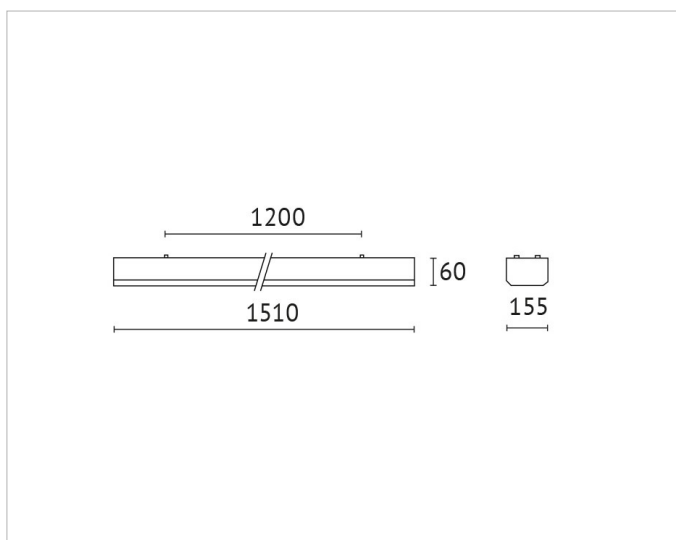

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de