
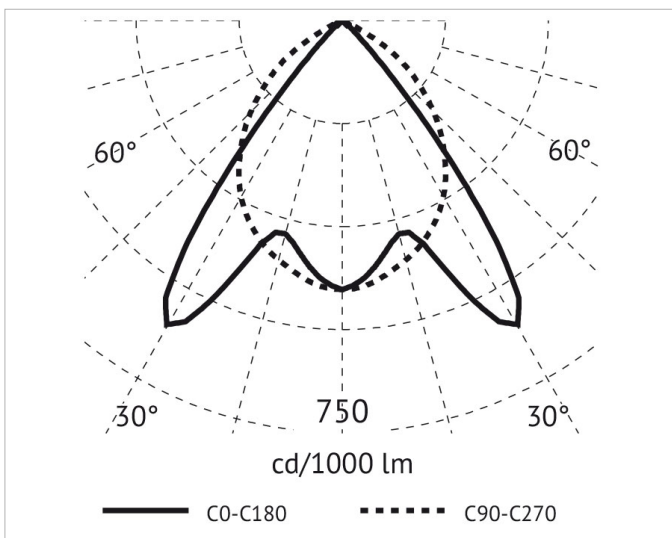


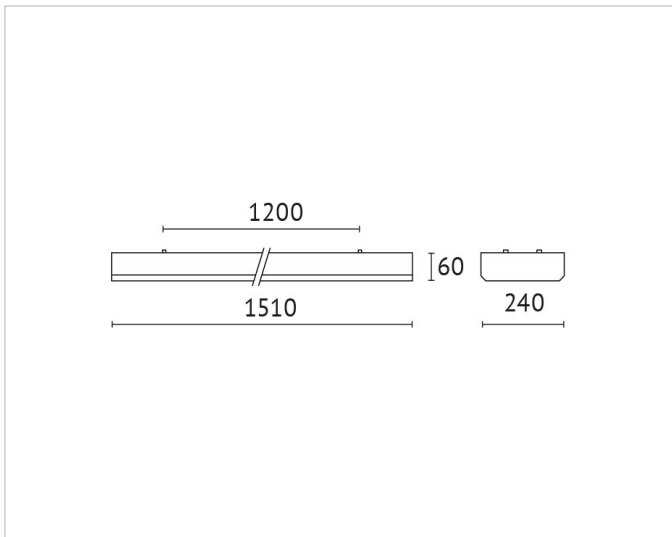

## Description

LED ceiling mounted waterproof light fitting, DPB, IP20, 4000K, 58/33W, 1510\*240\*60mm, UGR<19, L80/B10, 50.000h, IP20, , ta -20 till +25%

## General data

|                                         |       |
|-----------------------------------------|-------|
| <b>Colour housing:</b>                  | White |
| <b>Degree of protection (IP):</b>       | IP20  |
| <b>Material housing:</b>                | Steel |
| <b>Protection class:</b>                | I     |
| <b>Suitable for ceiling mounting:</b>   | Yes   |
| <b>Suitable for surface mounting:</b>   | Yes   |
| <b>Suitable for suspended mounting:</b> | Yes   |

## Photometric data

|                                                        |                  |
|--------------------------------------------------------|------------------|
| <b>Beam angle:</b>                                     | Wide beam 41-80° |
| <b>Colour consistency (McAdam ellipse):</b>            | SDCM3            |
| <b>Colour of light:</b>                                | White            |
| <b>Colour rendering index CRI:</b>                     | 80-89            |
| <b>Colour temperature:</b>                             | 4000K            |
| <b>Light distributor:</b>                              | Reflector        |
| <b>Light outlet:</b>                                   | Direct           |
| <b>Light sharing:</b>                                  | Symmetric        |
| <b>Luminaire efficacy:</b>                             | 121lm/W          |
| <b>Max. system power:</b>                              | 58W              |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 7000lm           |
| <b>Suitable for number of lamps:</b>                   | 1                |
| <b>Suitable for workplace according to EN 12464-1:</b> | Yes              |
| <b>Type of grid:</b>                                   | High-gloss       |
| <b>Unified Glare Ratio (UGR):</b>                      | 17.35            |



## Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30  
E-Mail: info@als.de | Web: www.als.de





#### Electrical data

|                                   |             |
|-----------------------------------|-------------|
| <b>Exchangeable control gear:</b> | Yes         |
| <b>No dim function:</b>           | Yes         |
| <b>Nominal voltage:</b>           | 220V - 240V |
| <b>Voltage type:</b>              | AC          |
| <b>With control gear:</b>         | Yes         |

#### Product dimensions

|                      |        |
|----------------------|--------|
| <b>Height/depth:</b> | 60mm   |
| <b>Length:</b>       | 1510mm |
| <b>Width:</b>        | 240mm  |

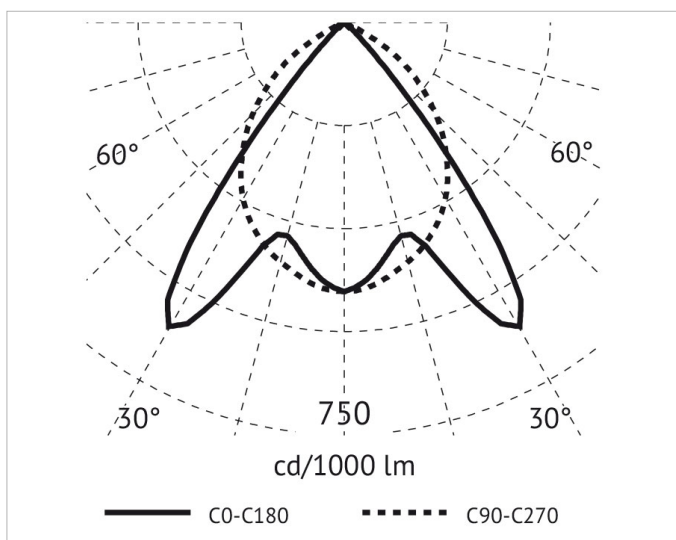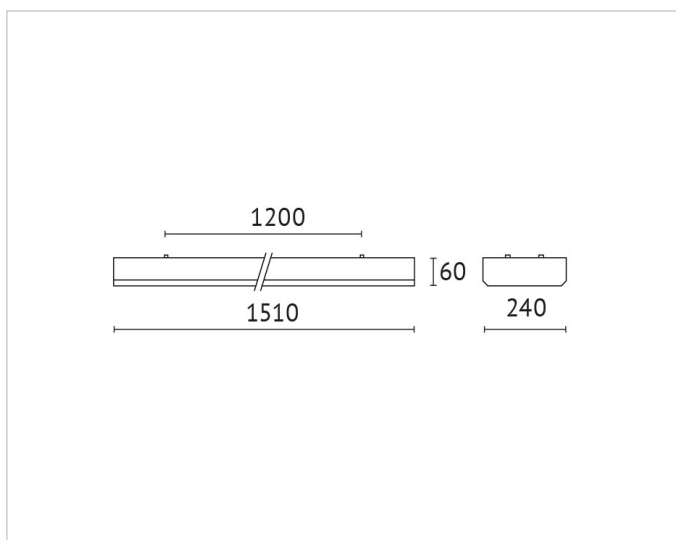

#### Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
fon.: +49 7542 9344-0 | fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)