
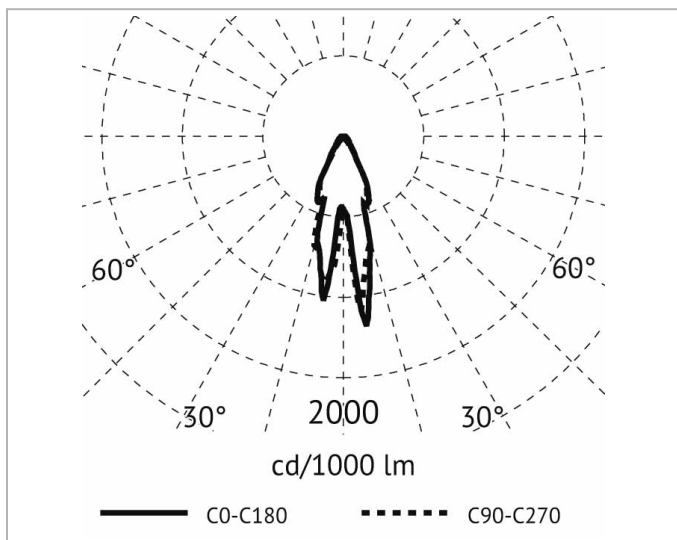


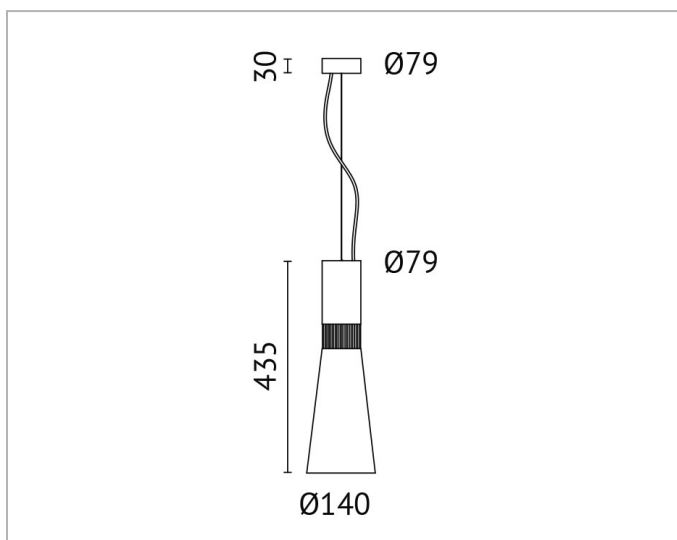

Description

LPL, Pendant luminaire, COB LED 35W, 3000K, 890mA, 230V, inkl. power supply, Ø/H: 140mm/430mm, suspension transparent 1,5m, baldachine white, body white/silver

General data

Colour housing:	Multi-coloured
Degree of protection (IP):	IP20
Lamp holder:	None
Material cover:	Without cover
Material housing:	Aluminium
Protection class:	I
With suspension:	Yes

Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	76lm/W
Max. system power:	35W
Rated luminous flux according to IEC 62722-2-1:	2672lm
Suitable for number of lamps:	1
Type of grid:	None
Unified Glare Ratio (UGR):	19.10

Electrical data

Connection type:	Busbar adapter
Exchangeable control gear:	Yes
No dim function:	Yes
Nominal voltage:	240V

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de

Pendant luminaire



LPL-35WW11



Voltage type: AC
With control gear: Yes

Product dimensions

Diameter: 140mm
Height/depth: 435mm
Pendant length: 1500mm

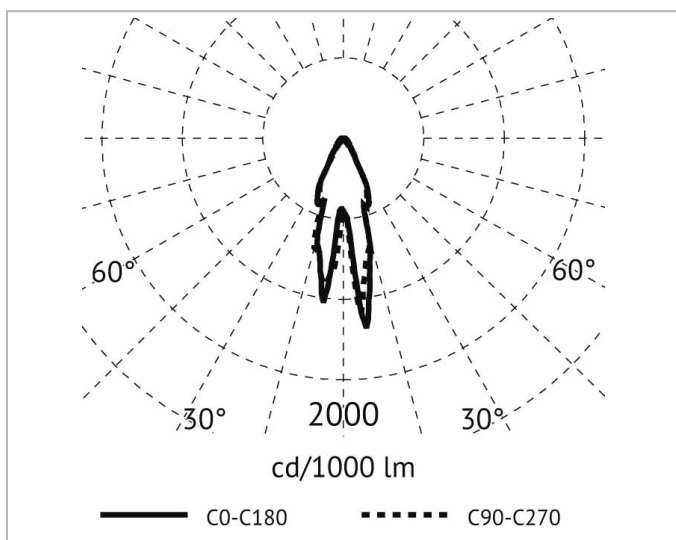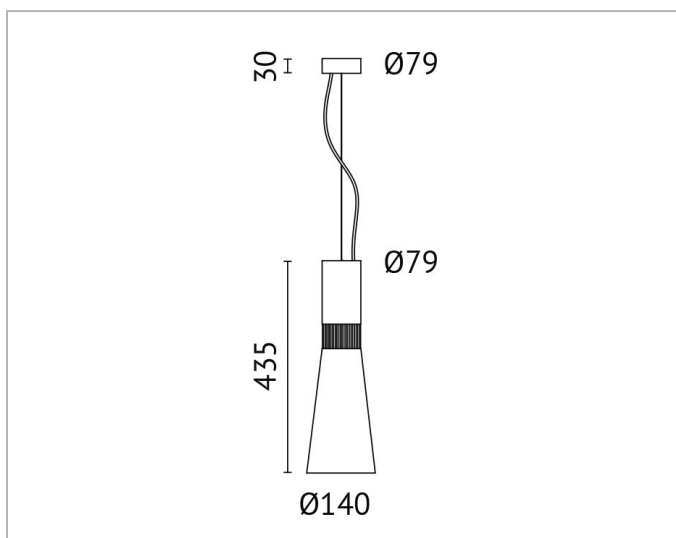

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de