
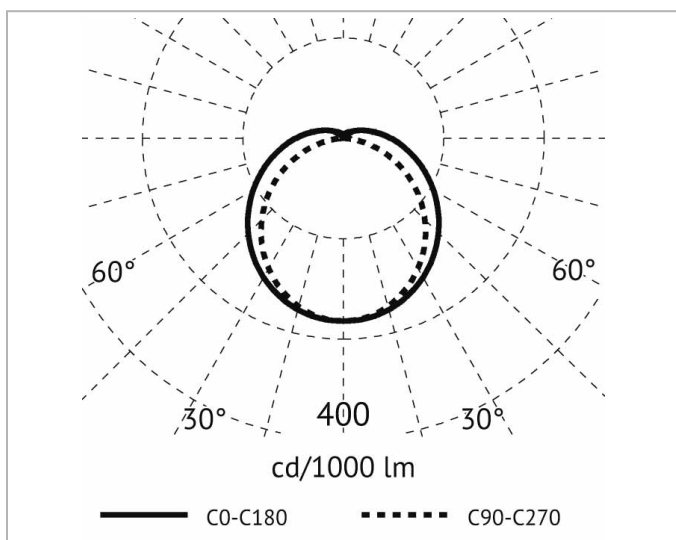


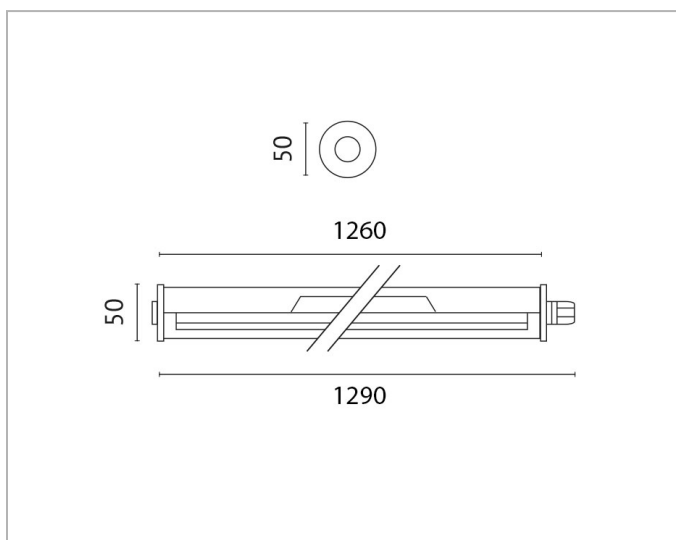

Description

LRON, Waterproof tubular luminaire, LED 31W, 4000K, natural white led's, opal tube in PC, incl. power supply, eletrconic gear tray made of white steel plate, length 1200mm, IP65

General data

Colour housing:	Colourless
Degree of protection (IP):	IP65
Material housing:	Plastic
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	98lm/W
Max. system power:	30W
Rated luminous flux according to IEC 62722-2-1:	2939lm
Suitable for number of lamps:	4

Electrical data

Exchangeable control gear:	Yes
No dim function:	Yes



Adress/Contact



A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Nominal voltage: 220V - 240V
Voltage type: AC

Product dimensions

Length: 1290mm
Outer diameter: 50mm

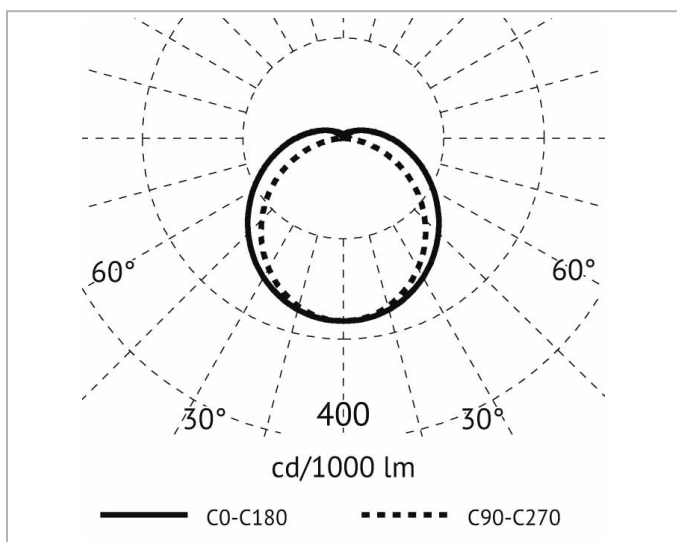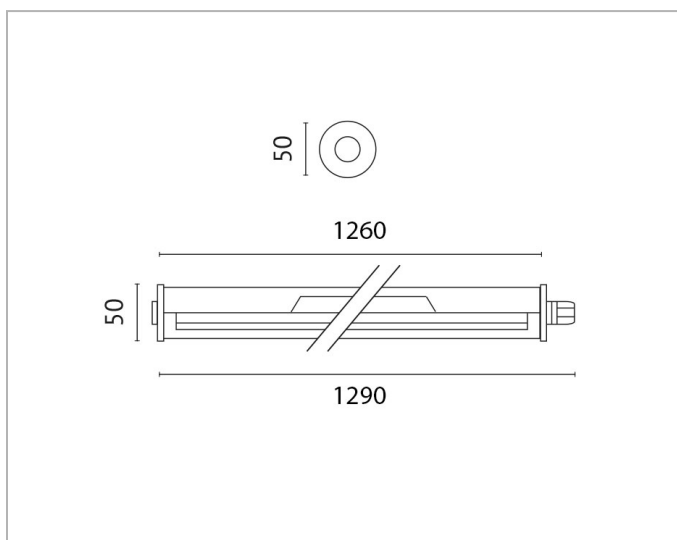

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de