
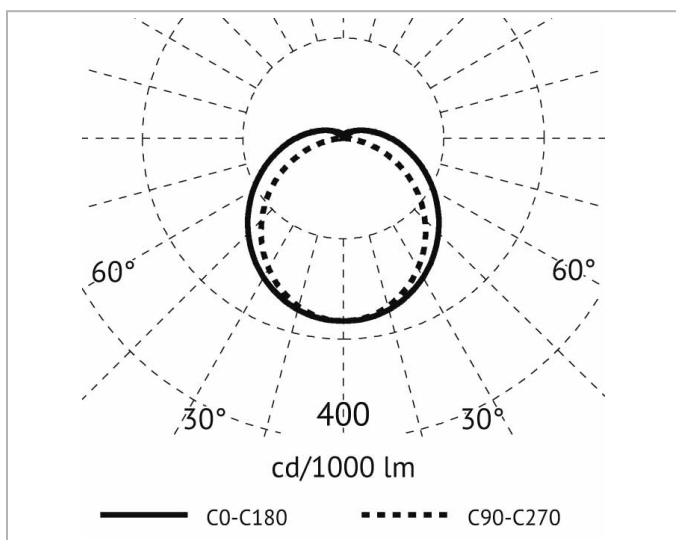


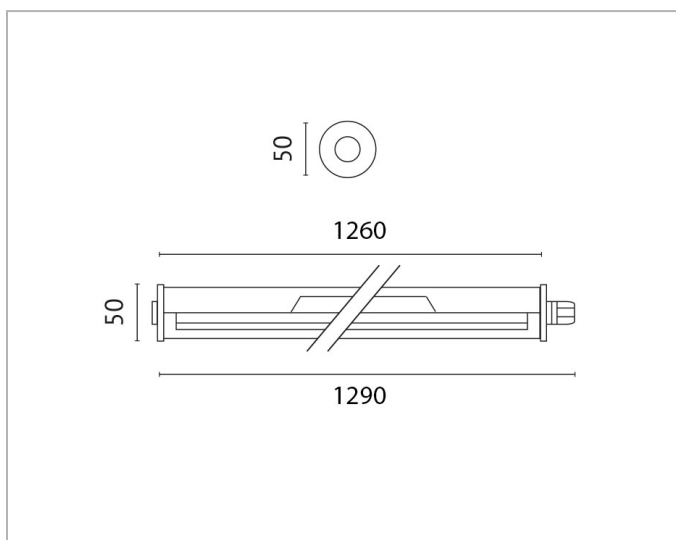

Description

LRON, Waterproof tubular luminaire, LED 31W, 2700K warm white led's, opal tube in PC, incl. power supply, eletrconic gear tray made of white steel plate, IP65

General data

Colour housing:	Colourless
Degree of protection (IP):	IP65
Material housing:	Plastic
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	2700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	98lm/W
Max. system power:	30W
Rated luminous flux according to IEC 62722-2-1:	2939lm
Suitable for number of lamps:	4
Unified Glare Ratio (UGR):	25.80



Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Electrical data

Exchangeable control gear:

Yes

No dim function:

Yes

Nominal voltage:

220V - 240V

Voltage type:

AC




Product dimensions

Length:

1290mm

Outer diameter:

50mm

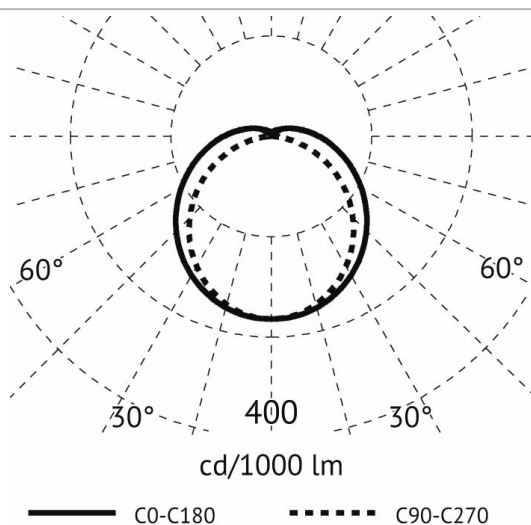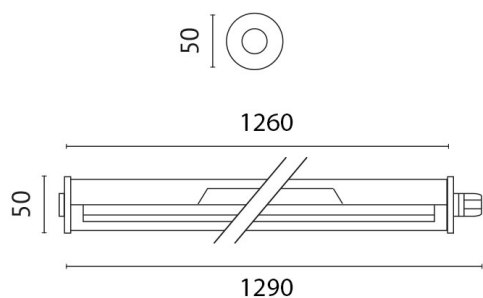

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de