
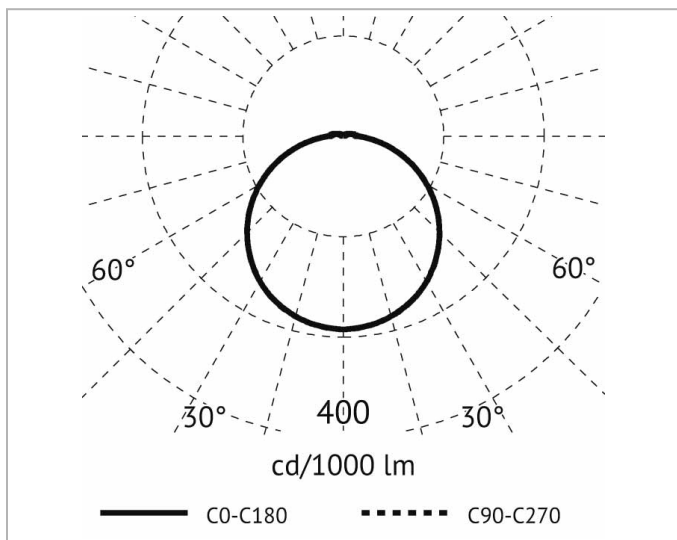
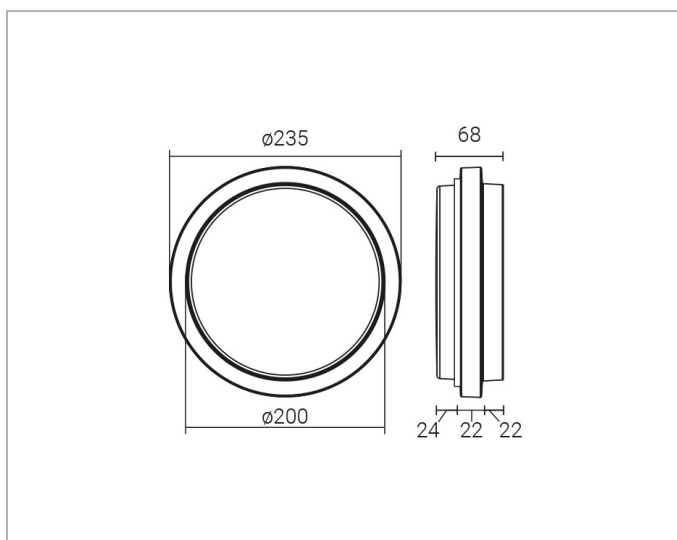


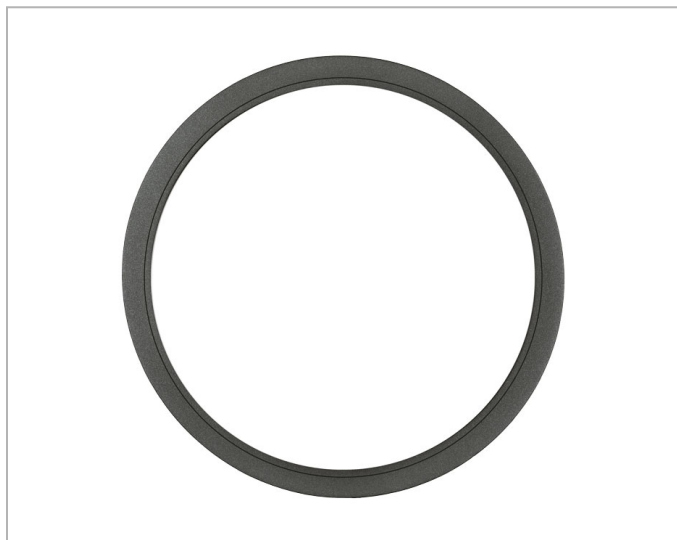

Description

9204AN4K LUNETTE Ø235mm, LED wall and ceiling mounted luminaire, body die-cast aluminium, 3h emergency light, motion sensor, 15W, 4000K, 230V, 50-60Hz, CRI >80, opal polycarbonate diffuser UV resistant, IK10, built-in driver, IP65, anthracite

General data

Colour housing:	Anthracite
Degree of protection (IP):	IP65
Material housing:	Aluminium
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Max. system power:	15W
Rated life time L70/B50 at 25 °C:	50000h


Electrical data

Exchangeable control gear:	Yes
Impact strength:	IK10
No dim function:	Yes
Nominal voltage:	230V
Voltage type:	AC
With movement sensor:	Yes





Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de

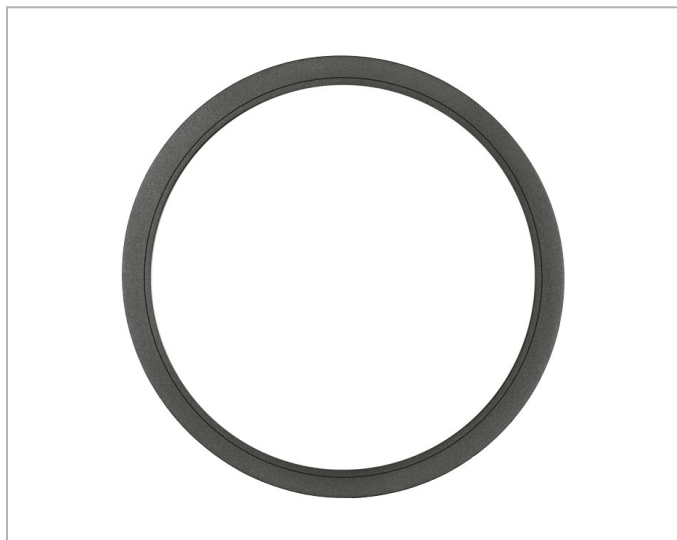

Product dimensions

Height/depth:	68mm
Outer diameter:	235mm

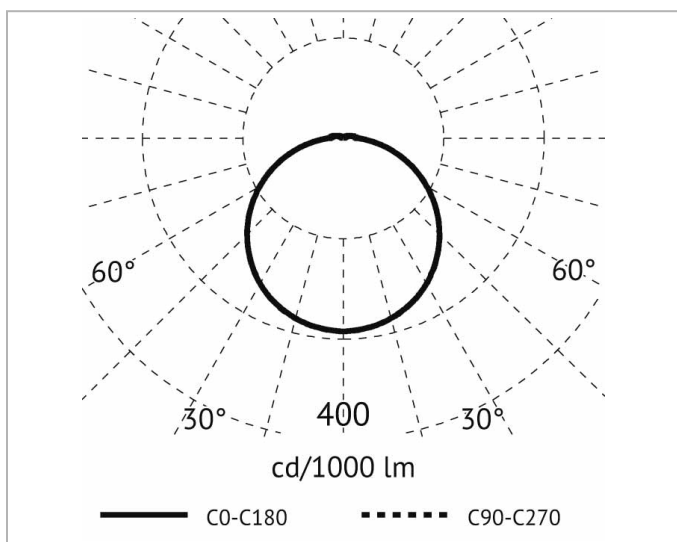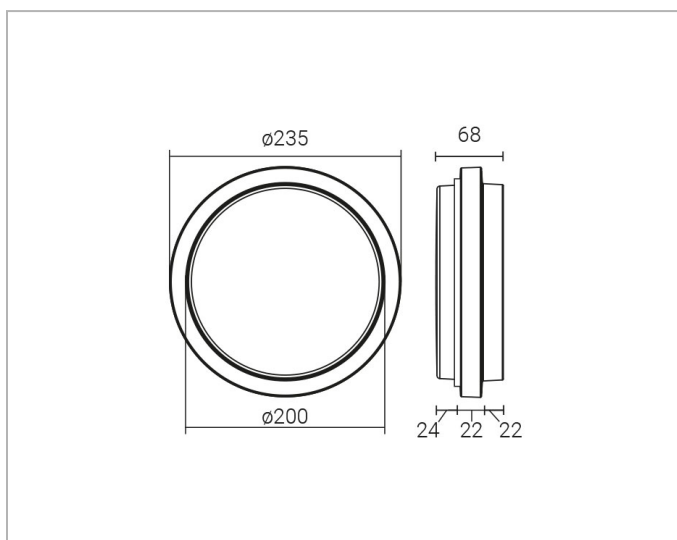

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de