

Description

1222BI4K LUX 30 SHOWER outdoor ceiling lamp, LED 10W, opal tempered glass diffuser, 120° angle beam, 4000K, aluminium die cast housing, white, CRI>80, IK10, EEC A+, IP65, DOB - driver on board

General data

Colour housing:	White
Degree of protection (IP):	IP65
Material housing:	Aluminium
Protection class:	I
Suitable for ceiling mounting:	Yes
Suitable for surface mounting:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	4000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	36lm/W
Max. system power:	10W
Rated luminous flux according to IEC 62722-2-1:	363lm
Suitable for number of lamps:	1

Electrical data

Dimming phase cut-on:	Yes
Impact strength:	IK10
Nominal voltage:	230V
Voltage type:	AC

Product dimensions

Height/depth:	36.5mm
----------------------	--------



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de

Ceiling-/wall luminaire

LUX30-10NW1F





Length:

110mm

Width:

110mm

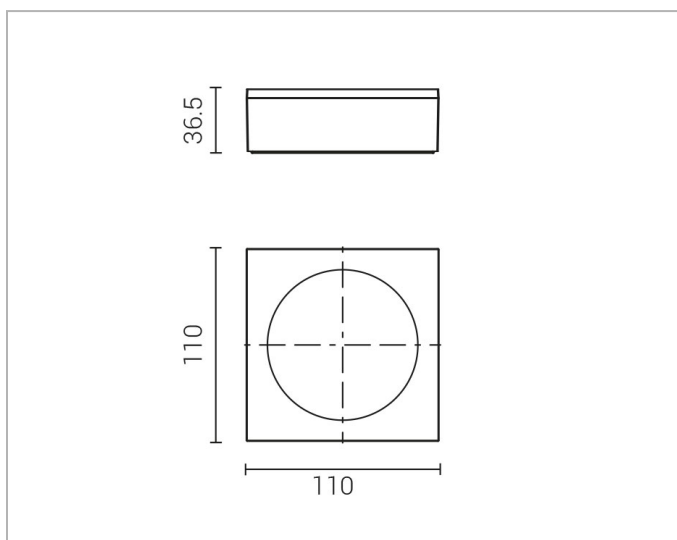

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de