
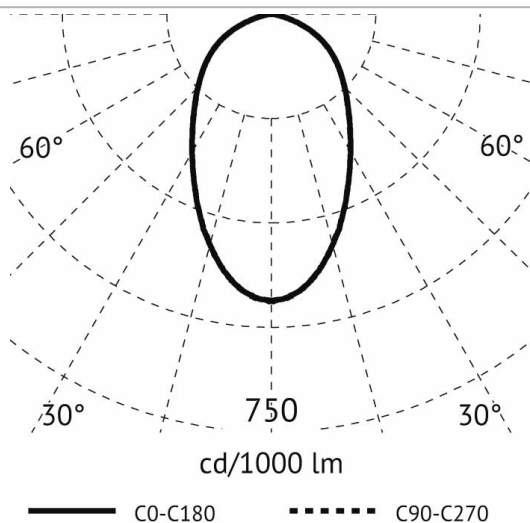


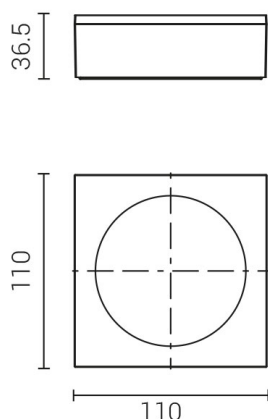

## Description

1221AG3K90 LUX 30 SHOWER outdoor ceiling lamp, LED 10W, clear tempered glass diffuser, 90° angle beam, 3000K, aluminium die cast housing, aluminium grey, CRI 80, IK10, IP65, DOB - driver on board

## General data

|                                       |           |
|---------------------------------------|-----------|
| <b>Colour housing:</b>                | Grey      |
| <b>Degree of protection (IP):</b>     | IP65      |
| <b>Material housing:</b>              | Aluminium |
| <b>Protection class:</b>              | I         |
| <b>Suitable for ceiling mounting:</b> | Yes       |
| <b>Suitable for surface mounting:</b> | Yes       |

## Photometric data

|                                                        |                        |
|--------------------------------------------------------|------------------------|
| <b>Beam angle:</b>                                     | Extreme wide beam >80° |
| <b>Colour of light:</b>                                | White                  |
| <b>Colour rendering index CRI:</b>                     | 80-89                  |
| <b>Colour temperature:</b>                             | 3000K                  |
| <b>Light outlet:</b>                                   | Direct                 |
| <b>Light sharing:</b>                                  | Symmetric              |
| <b>Luminaire efficacy:</b>                             | 72lm/W                 |
| <b>Max. system power:</b>                              | 10W                    |
| <b>Rated luminous flux according to IEC 62722-2-1:</b> | 720lm                  |
| <b>Suitable for number of lamps:</b>                   | 1                      |

## Electrical data

|                              |      |
|------------------------------|------|
| <b>Dimming phase cut-on:</b> | Yes  |
| <b>Impact strength:</b>      | IK10 |
| <b>Nominal voltage:</b>      | 230V |
| <b>Voltage type:</b>         | AC   |

## Product dimensions

|                      |        |
|----------------------|--------|
| <b>Height/depth:</b> | 36.5mm |
|----------------------|--------|



## Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH  
 Mastorter Str. 31 | 88069 Tettnang (Germany)  
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
 E-Mail: info@als.de | Web: www.als.de





**Length:**

110mm

**Width:**

110mm

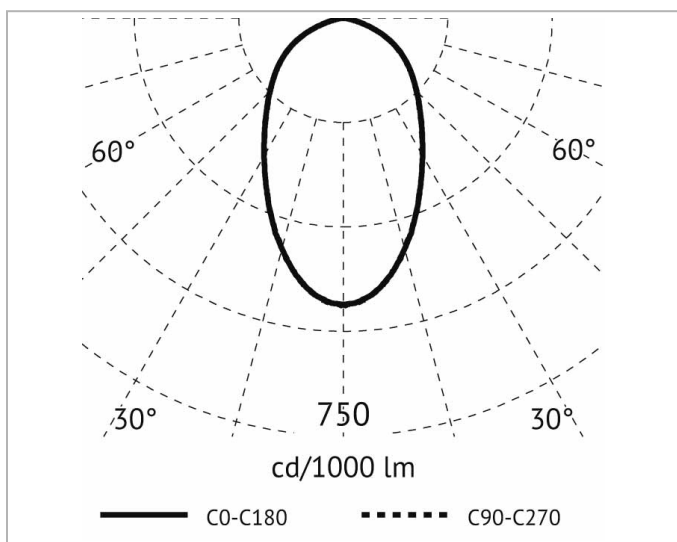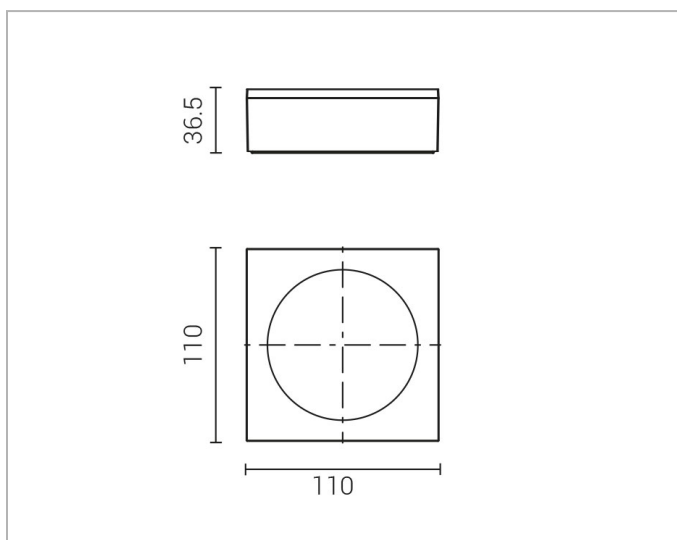

**Adress/Contact**

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)