
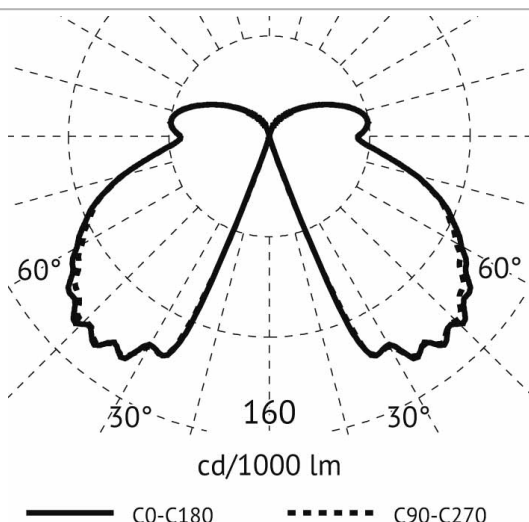




Description

MATITA Bollard, LED 14W, H=500mm, IP65, 3000K, 220-240V, beam angle 360°, opal diffuser, incl. Power supply, die-cast aluminium, anthracite

General data

Colour housing:	Anthracite
Degree of protection (IP):	IP65
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Type of luminaire:	Bollard luminaire
With base plate:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	96lm/W
Max. system power:	14W
Rated luminous flux according to IEC 62722-2-1:	1152lm

Electrical data

Impact strength:	IK07
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Diameter:	120mm
Height/depth:	500mm

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de