
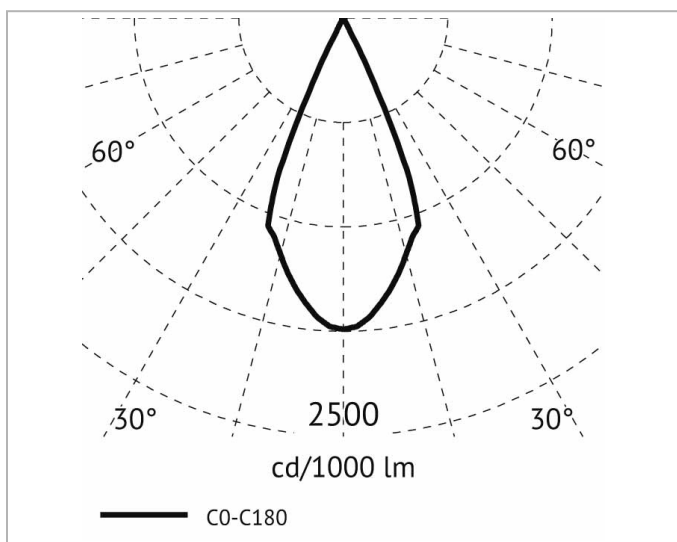


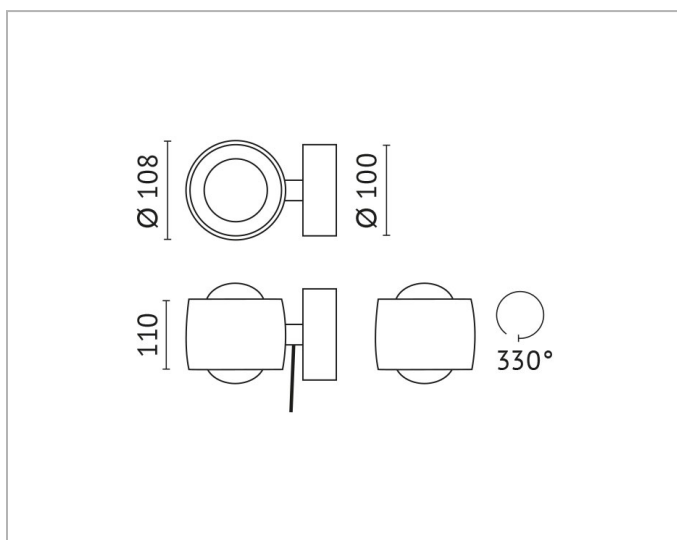

Description

MAYA wall mounted light fitting, 2 light beam, glass lense 50°, white housing, 2700K, 2x8W, integrated power supply, TRIAC dim, 220-240V, CRI>90

General data

Colour housing:	White
Degree of protection (IP):	IP20
Material housing:	Aluminium
Protection class:	II
Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes

Photometric data

Beam angle:	Wide beam 41-80°
Colour consistency (McAdam ellipse):	SDCM3
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	2700K
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	62lm/W
Max. system power:	16W
Rated luminous flux according to IEC 62722-2-1:	998lm
Suitable for number of lamps:	1
Suitable for workplace according to EN 12464-1:	Yes
Unified Glare Ratio (UGR):	11.90

Electrical data

Dimming phase cut-on:	Yes
------------------------------	-----



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Exchangeable control

gear:

Yes

Nominal voltage:

220V - 240V

Voltage type:

AC



Product dimensions

Height/depth:

110mm

Outer diameter:

108mm

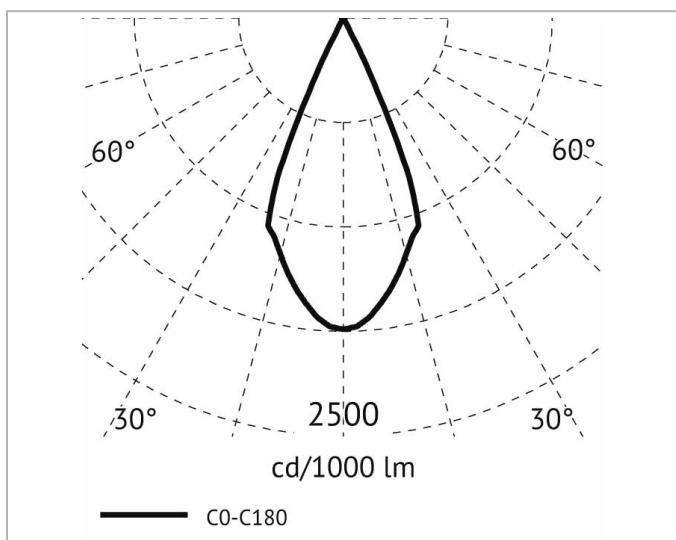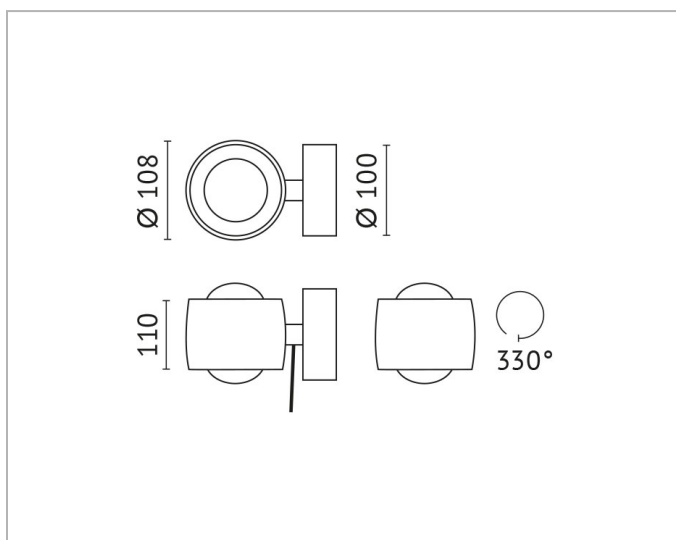

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de